


**INTRODUCTION**

The KA9257, a monolithic integrated circuit, is a dual power operational amplifier with a maximum output current of 0.5A. Since it consists of a balance transless, both forward and reverse operation of the motor can be achieved on a single power source. The device is suitable for a CD player.

**FEATURES**

- 2 channel BTL driver
- Low input bias ( $I_{IB} = 30nA$ )
- Built in phase compensation capacitor
- Housed in a 12SIP H/S package for easy heat discharge
- Improved crosstalk: (CT = 80dB)
- High output current: ( $I_O = 0.5A$ )



**ORDERING INFORMATION**

Device	Package	Operating Temperature
KA9257	12-SIPH-A	-25°C~+75°C
KA9257S	12-SIPH-B	

**BLOCK DIAGRAM**

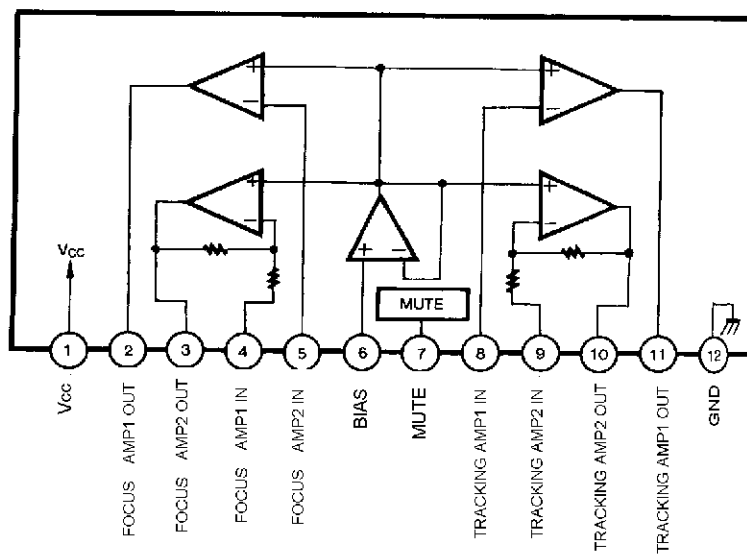


Fig. 1

**ABSOLUTE MAXIMUM RATINGS** ( $T_a = 25^\circ\text{C}$ )

Characteristic	Symbol	Value	Unit
Supply Voltage	$V_{CC}$	18	V
Power Dissipation	$P_D$	15	W
Operating Temperature	$T_{OPR}$	-25 ~ +75	$^\circ\text{C}$
Storage Temperature	$T_{STG}$	-55 ~ +150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS**

 ( $T_a = 25^\circ\text{C}$ ,  $V_{CC} = 12\text{V}$ ,  $f = 1\text{KHz}$ ,  $R_L = 4\text{ohm}$ , unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Quiescent Circuit Current	$I_{CCQ}$	$V_I = 0$	-	3	10	mA
Input Bias Current	$I_{BIAS1}$	$V_I = 0$	-	30	100	nA
Input Bias Pin Current	$I_{BIAS2}$	$V_I = 0$	-	100	300	nA
Output Offset Voltage	$V_{OO}$	$V_I = 0$	-50	0	50	mV
Maximum Source Current	$I_{SOURCE}$	$R_L = 4\text{ohm}$ , $V_O = \text{GND}$	0.7	1.4	-	A
Maximum Sink Current	$I_{SINK}$	$R_L = 4\text{ohm}$ , $V_O = V_{CC}$	0.4	0.8	-	A
Maximum Output Voltage	$V_{O(MAX)}$	$V_I = 2V_{rms}$	1.8	2.5	-	$V_{rms}$
Closed Loop Voltage Gain	$G_{VC}$	$V_I = 0.1V_{rms}$	5.0	6.0	7.0	dB
Cut-off Frequency	$f_T$	$V_I = 0.1V_{rms}$ , 3dB Down	15	20	-	KHz
Cross-Talk	CT	$V_I = 0.1V_{rms}$ , BPF: 20-20KHz	40	80	-	dB
Ripple Rejection Ratio	RR	$V_{RR} = 0.1V_{rms}$ $F_{RR} = 120\text{Hz}$	30	40	-	dB
Slew-Rate	SR	$V_I = 0.3V_{pp}$ Squarwave	-	0.3	-	$V/\mu\text{S}$

TEST CIRCUIT

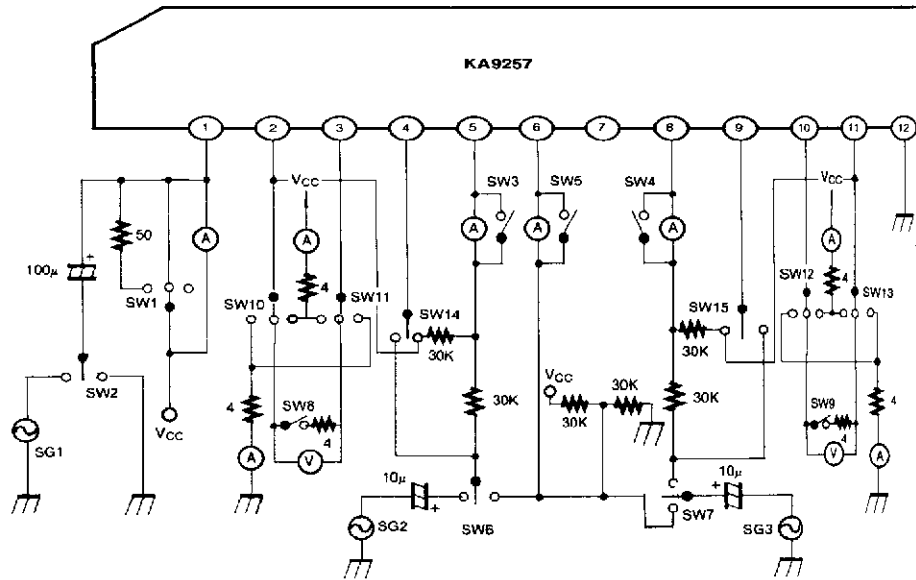


Fig. 2

APPLICATION CIRCUIT

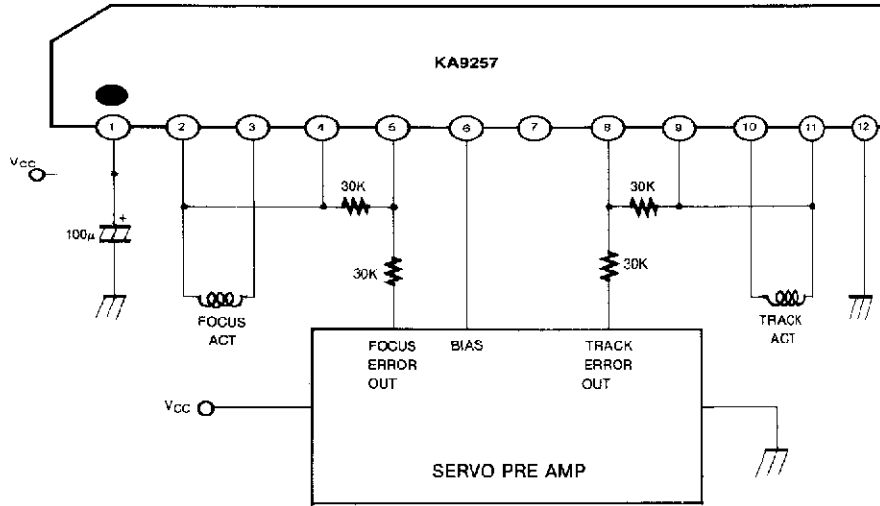


Fig. 3

**Precautions**

1. In designing the board, a minimum of 6cms of segregation should be allowed between the motor drive IC (KA9257) and other components such as the micom and/or Recorder/Player Ics.
2. To get a stable supply of voltage and radiation shield effect, the CD Deck needs to be grounded.

