

Princeton Technology Corp. reserves the right to change the product described in this datasheet. All information contained in this datasheet is subject to change without prior notice. Princeton Technology Corp. assumes no responsibility for the use of any circuits shown in this datasheet.

## Description

The TX4915 is a low power ASK transmitter IC intended for applications in the North American and European VHF/UHF bands. The integrated voltage-controlled oscillator (VCO), phase/frequency detector, prescaler, and reference oscillator require only the addition of an external crystal to provide a complete phase-locked loop (PLL). In addition to the standard power-down mode, the chip also includes an automatic lock-detect feature that disables the transmitter output when the PLL is out-of-lock.


## Features

- ◆ Output frequency range: 300 – 960 MHz
- ◆ Supply voltage range: 2.2 – 3.6 V
- ◆ Low current consumption with power down capability
- ◆ On-chip VCO with integrated PLL ( $\div 64/128$ ) dual modulus prescaler
- ◆ Out-of-lock inhibit circuit
- ◆ SSOP-16 package (0.64 mm pitch)

## Applications


- ◆ Wireless mouse
- ◆ Car alarm and home security systems
- ◆ Remote control systems

## Block Diagram

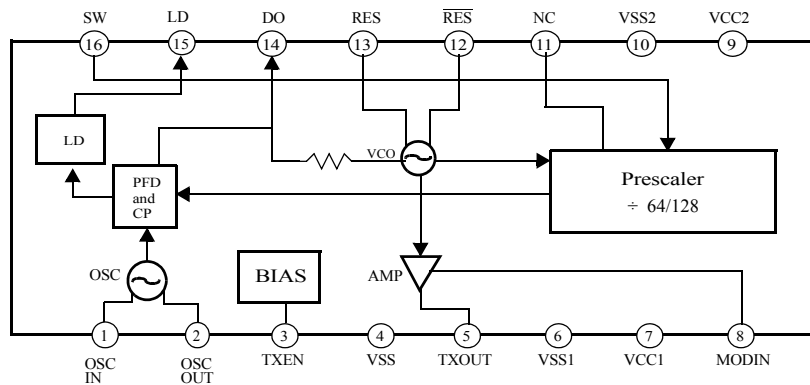

## Package and Pin Assignment

SSOP-16 (0.64mm pitch)

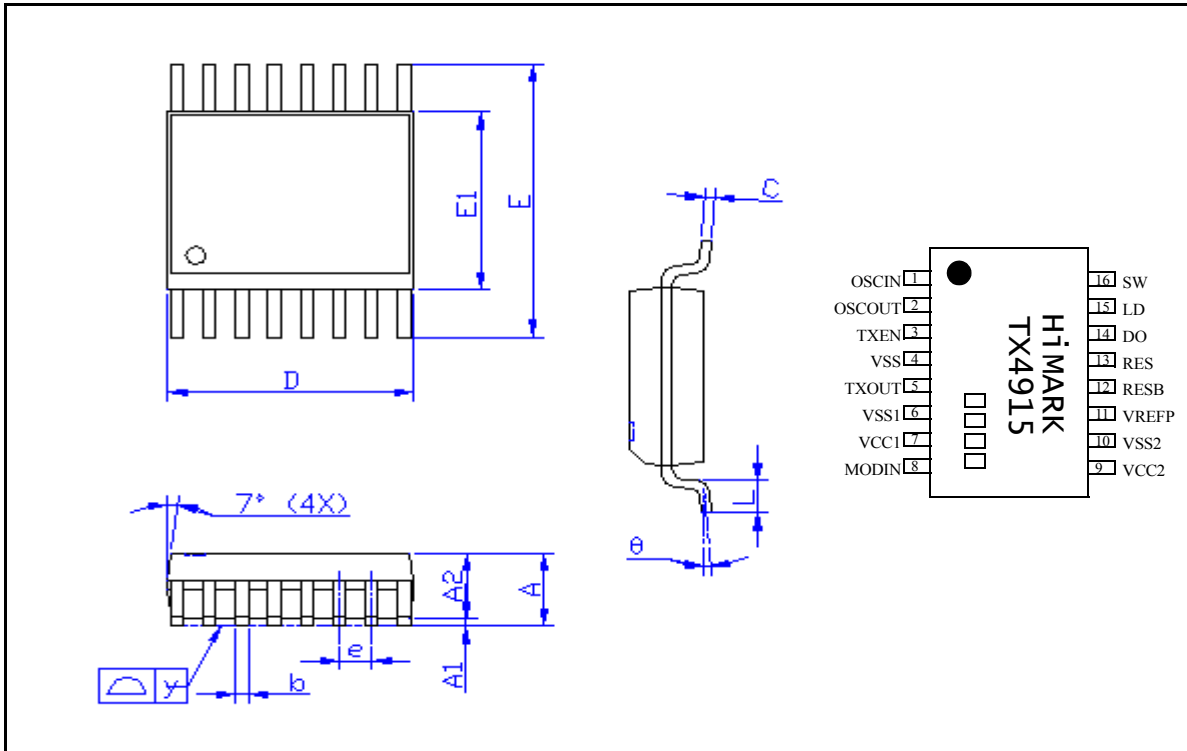

Symbol	Dimensions in mm			Dimensions in inches		
	min.	nom.	max.	min.	nom.	max.
A	1.35	1.60	1.75	0.053	0.064	0.069
A1	0.10	—	0.25	0.004	—	0.010
A2	—	1.45	—	—	0.057	—
b	0.20	0.25	0.30	0.008	0.010	0.012
C	0.19	—	0.25	0.007	—	0.010
D	4.80	—	5.00	0.189	—	0.197
E	5.80	—	6.20	0.228	—	0.244
E1	3.80	—	4.00	0.150	—	0.157
e	—	0.64	—	—	0.025	—
L	0.40	—	1.27	0.016	—	0.050
y	—	—	0.10	—	—	0.004
$\theta$	0°	—	8°	0°	—	8°

## Pin Descriptions

Number	Name	Description
1	OSCIN	This pin is connected directly to the base of the reference oscillator transistor. The reference oscillator uses a modified Colpitts configuration.
2	OSCOU	This pin is connected directly to the emitter of the reference oscillator transistor.
3	TXEN	Transmitter enable control (TXEN = low = power down mode; TXEN = high = normal operation mode).
4	VSS	Ground connection for the transmit output amplifier.
5	TXOUT	Transmitter output. This pin is an open collector output and requires a pull-up inductor for bias/matching and a tapped capacitor network for matching.
6	VSS1	Ground connection for the transmit driver amplifier.
7	VCC1	Nominal supply voltage for the transmit driver amplifier.
8	MODIN	ASK modulation input. An external resistor, $R_{MODIN}$ , connected from the MODIN pin to supply voltage is used to bias the transmit amplifier chain.
9	VCC2	Nominal supply voltage for the VCO and PLL circuitry.
10	VSS2	Ground connection for the PLL circuitry.
11	NC	No connection.
12	$\overline{RES}$	Differential open collector VCO outputs.
13	RES	
14	DO	Output of the charge pump. An R-C network from this pin to ground is used to establish the PLL bandwidth. The DO pin is internally connected to the tuning voltage input of the VCO thru a 4 K $\Omega$ series resistor.
15	LD	Lock detector output. This pin is used to set the threshold of the lock detect circuitry which enables or disables the transmit amplifier. A shunt capacitor should be used to set an R-C time constant with the on-chip series 1 K $\Omega$ resistor. The time constant should be set to approximately 15 times the reference period.
16	SW	Prescaler modulus control input (SW = high = $\div 64$ ; SW = low = $\div 128$ ).