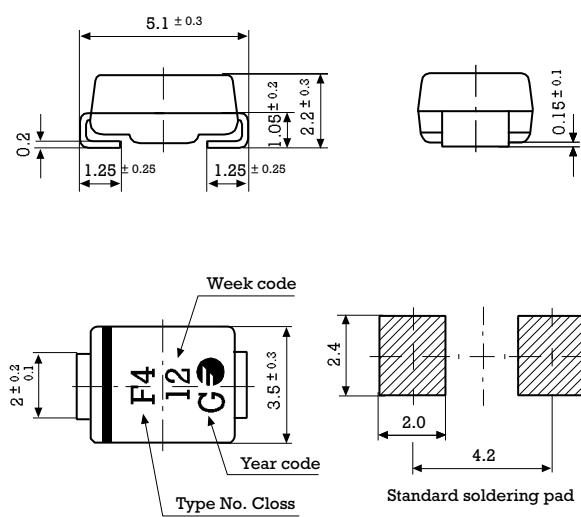



## 1.5 Amp. Surface Mounted Glass Passivated Fast Recovery Rectifier


<p><b>Dimensions in mm.</b></p>  <p><b>CASE:</b> SMB/DO-214AA</p> <p>Week code Year code Type No. Class</p> <p>Standard soldering pad</p>	<p><b>Voltage</b> 50 to 1000 V</p> <p><b>Current</b> 1.5 A</p>  <ul style="list-style-type: none"> <li>Glass passivated junction</li> <li>High current capability</li> <li>The plastic material carries U/L 94 V-0</li> <li>Low profile package</li> <li>Easy pick and place</li> <li>High temperature soldering 260 °C 10 sec</li> </ul> <p><b>MECHANICAL DATA</b>                  Terminals: Solder plated, solderable per IEC 68-2-20.                  Standard Packaging: 8 mm. tape (EIA-RS-481).                  Weight: 0.093 g.</p>
---	--

### Maximum Ratings and Electrical Characteristics at 25 °C


		FRS2A	FRS2B	FRS2D	FRS2G	FRS2J	FRS2K	FRS2M
Marking Code		G1	G2	G3	G4	G5	G6	G7
$V_{RRM}$	Maximum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000
$V_{RMS}$	Maximum RMS Voltage	35	70	140	280	420	560	700
$V_{DC}$	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000
$I_{F(AV)}$	Forward current at $T_L = 100\text{ °C}$	1.5 A						
$I_{FSM}$	8.3 ms. peak forward surge current (Jedec Method)	50 A						
$V_F$	Maximum Instantaneous Forward Voltage at 1.5 A	1.3 V						
$I_R$	Maximum DC Reverse Current at Rated DC Blocking Voltage	$T_a = 25\text{ °C}$ : 5 $\mu$ A $T_a = 125\text{ °C}$ : 200 $\mu$ A						
$t_{rr}$	Maximum Reverse Recovery Time (0.5/1/0.25A)	150 ns				250 ns	300 ns	
$C_j$	Typical Junction Capacitance (1MHz; -4V)	35 pF						
$R_{th(j-l)}$ $R_{th(j-a)}$	Typical Thermal Resistance (5x5 mm <sup>2</sup> x 130 $\mu$ Copper Area)	$20\text{ °C/W}$ $60\text{ °C/W}$						
$T_j - T_{stg}$	Operating Junction and Storage Temperature Range	-55 to + 150 °C						

### Rating And Characteristic Curves


FORWARD CURRENT DERATING CURVE

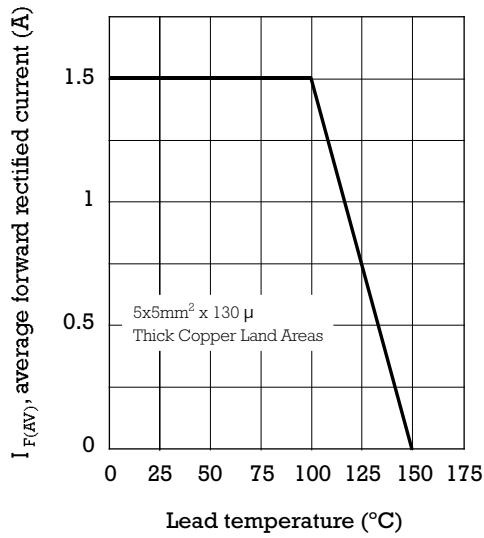


TYPICAL FORWARD CHARACTERISTIC

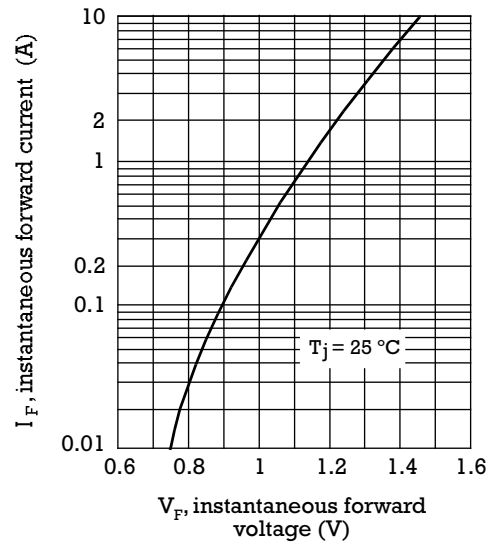

MAXIMUM NON REPETITIVE PEAK FORWARD SURGE CURRENT

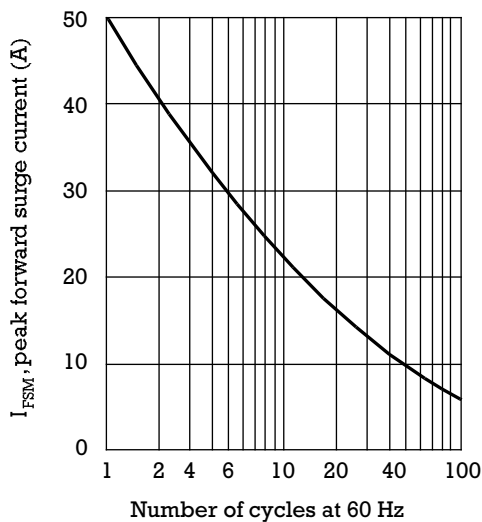

TYPICAL REVERSE CHARACTERISTIC

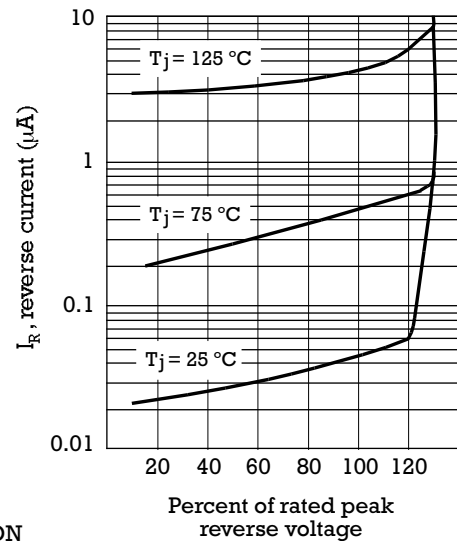

TYPICAL JUNCTION CAPACITANCE

