





# GBU25005 ~ GBU2510

50 V ~ 1000 V  
25.0 Amp High Current Glass Passivated  
Molding Single-Phase Bridge Rectifier

RoHS Compliant Product

A suffix of "-C" specifies halogen-free and RoHS Compliant

GBU

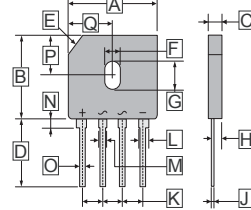

## FEATURES

- Surge overload rating -350 amperes peak
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- Plastic material has U/L flammability classification 94V-0
- Mounting position : Any

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave , 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

| REF. | Millimeter |       | REF. | Millimeter |       |
|------|------------|-------|------|------------|-------|
|      | Min.       | Max.  |      | Min.       | Max.  |
| A    | 21.80      | 22.20 | J    | 0.46       | 0.56  |
| B    | 18.30      | 19.10 | K    | 4.80       | 5.30  |
| C    | 3.37       | 3.53  | L    | 2.16       | 2.54  |
| D    | 17.27      | 18.29 | M    | 1.65       | 2.03  |
| E    | 3.2 x 45°  |       | N    | 1.45       | 1.85  |
| F    | 3.70       | 3.90  | O    | 0.90       | 1.20  |
| G    | 5.70       | 5.90  | P    | 9.80       | 10.20 |
| H    | 2.30       | 2.70  | Q    | 10.90      | 11.10 |

| PARAMETERS   | SYMBOL          | PART NUMBERS |             |             |             |             |             |             | UNITS                       |
|--|-----------------|--------------|-------------|-------------|-------------|-------------|-------------|-------------|-----------------------------|
|  |                 | GBU<br>25005 | GBU<br>2501 | GBU<br>2502 | GBU<br>2504 | GBU<br>2506 | GBU<br>2508 | GBU<br>2510 |                             |
| Maximum Recurrent Peak Reverse Voltage   | $V_{RRM}$       | 50           | 100         | 200         | 400         | 600         | 800         | 1000        | V                           |
| Maximum RMS Voltage  | $V_{RMS}$       | 35           | 70          | 140         | 280         | 420         | 560         | 700         | V                           |
| Maximum DC Blocking Voltage  | $V_{DC}$        | 50           | 100         | 200         | 400         | 600         | 800         | 1000        | V                           |
| Maximum DC Reverse Current @ $T_J=25^\circ\text{C}$<br>at Rated DC Blocking Voltage @ $T_J=125^\circ\text{C}$          | $I_R$           | 10.0         |             |             |             |             |             |             | $\mu\text{A}$               |
|  |                 | 500          |             |             |             |             |             |             |                             |
| Maximum Average Forward<br>(with heatsink Note 2)<br>Rectified Current @ $T_C=100^\circ\text{C}$<br>(without heatsink) | $I_{(AV)}$      | 25.0         |             |             |             |             |             |             | A                           |
|  |                 | 4.2          |             |             |             |             |             |             |                             |
| Peak Forward Surge Current, 8.3ms single<br>half sine-wave superimposed on rated load<br>(JEDEC Method)                | $I_{FSM}$       | 350          |             |             |             |             |             |             | A                           |
| Rating For Fusing ( $t < 8.3\text{ms}$ )   | $I^2t$          | 200          |             |             |             |             |             |             | $\text{A}^2\text{s}$        |
| Maximum Forward Voltage @ 12.5A DC   | $V_F$           | 1.1          |             |             |             |             |             |             | V                           |
| Typical Junction Capacitance Per Element<br>(Note 1)   | $C_J$           | 70           |             |             |             |             |             |             | pF                          |
| Typical Thermal Resistance   | $R_{\theta JC}$ | 2.2          |             |             |             |             |             |             | $^\circ\text{C} / \text{W}$ |
| Operating and Storage Temperature Range  | $T_J, T_{STG}$  | -55 ~ 150    |             |             |             |             |             |             | $^\circ\text{C}$            |

Notes :

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Device mounted on 100mm \* 100mm \* 1.6mm Cu plate heatsink.

Any changes of specification will not be informed individually.



**GBU25005 ~ GBU2510**  
**50 V ~ 1000 V**  
**25.0 Amp High Current Glass Passivated**  
**Molding Single-Phase Bridge Rectifier**

**CHARACTERISTIC CURVES**

FIG.1-MAXIMUM FORWARD SURGE CURRENT

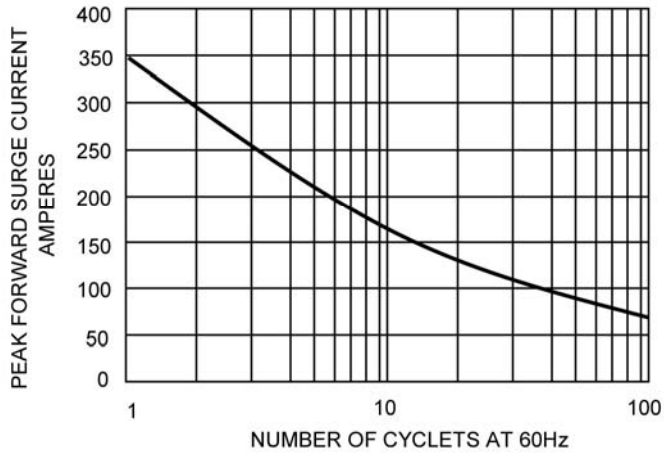


FIG.2- DERATING CURVE  
 OUTPUT RECTIFIED CURRENT

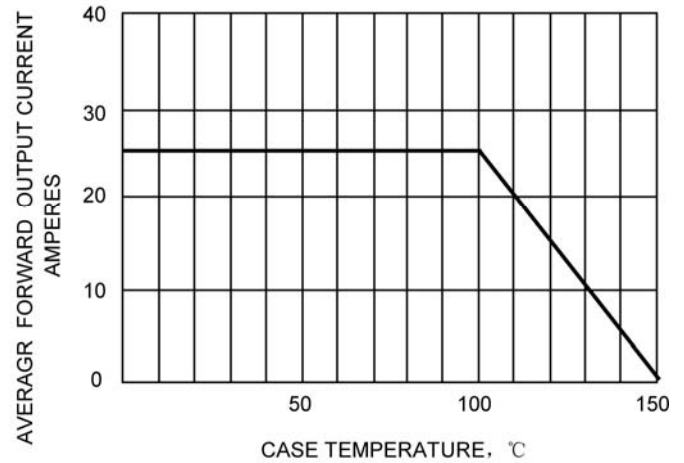


FIG.3-TYPICAL FORWARD  
 CHARACTERISTICS

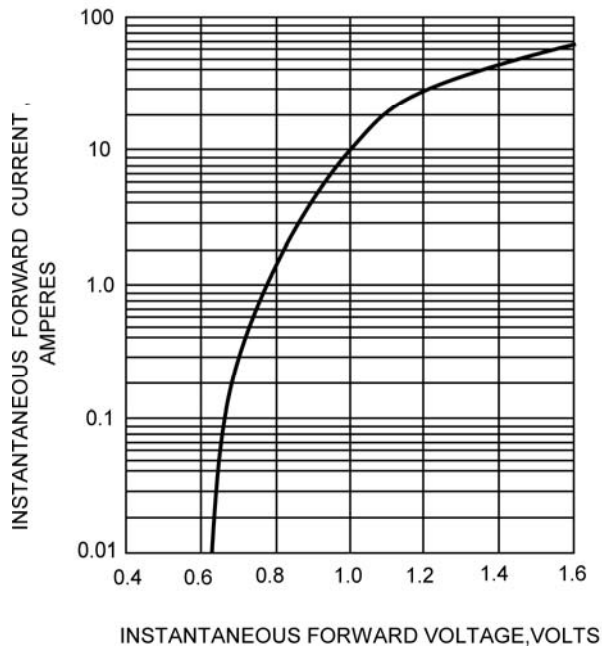


FIG.4-TYPICAL REVERSE  
 CHARACTERISTICS

