

---

# HD74AC538

1-of-8 Decoder with 3-State Output

# HITACHI

---

## Description


The HD74AC538 decoder/demultiplexer accepts three Address (A0 to A2) input signal and decodes them to select one of eight mutually exclusive outputs. A polarity control input (P) determines whether the outputs are active LOW or active HIGH. A HIGH signal on either of the active LOW output Enable ( $\overline{OE}$ ) inputs forces all outputs to the high impedance state. Two active HIGH and two active LOW input enables are available for easy expansion to 1-of-32 decoding with four packages, or for data demultiplexing to 1-of-8 or 1-of-16 destinations.

## Features

- Output Polarity Control
- Data Demultiplexing Capability
- Multiple Enables for Expansion
- Outputs Source/Sink 24 mA


# HD74AC538

## Pin Arrangement

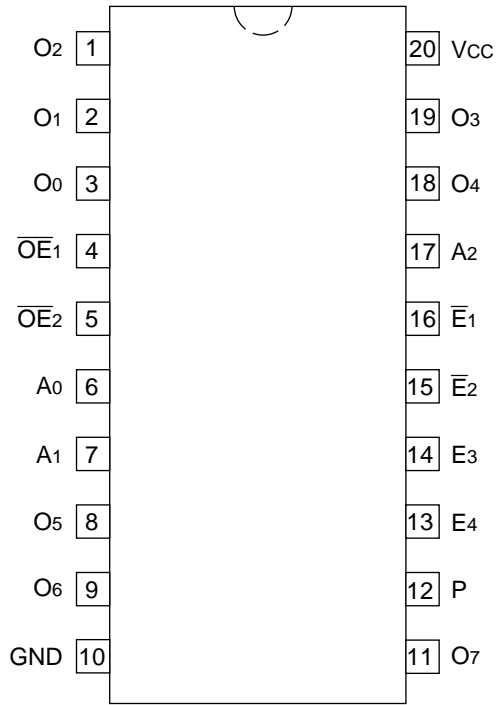

(Top view)

## Logic Symbol

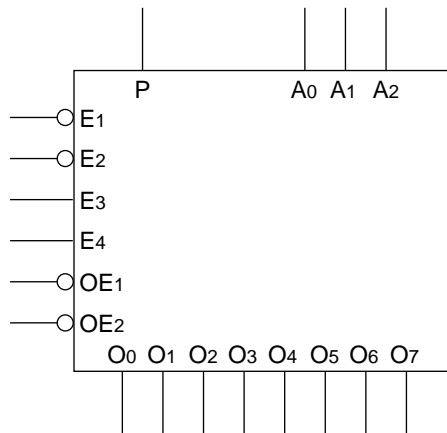


HITACHI

**Pin Names**

- A<sub>0</sub> to A<sub>2</sub> Address Inputs
- E<sub>1</sub>, E<sub>2</sub> Enable Inputs (Active LOW)
- E<sub>3</sub>, E<sub>4</sub> Enable Inputs (Active HIGH)
- P Polarity Control Input
- $\overline{OE}_1$ ,  $\overline{OE}_2$  Output Enable Inputs (Active LOW)
- O<sub>0</sub> to O<sub>7</sub> 3-State Outputs

**Logic Diagram**

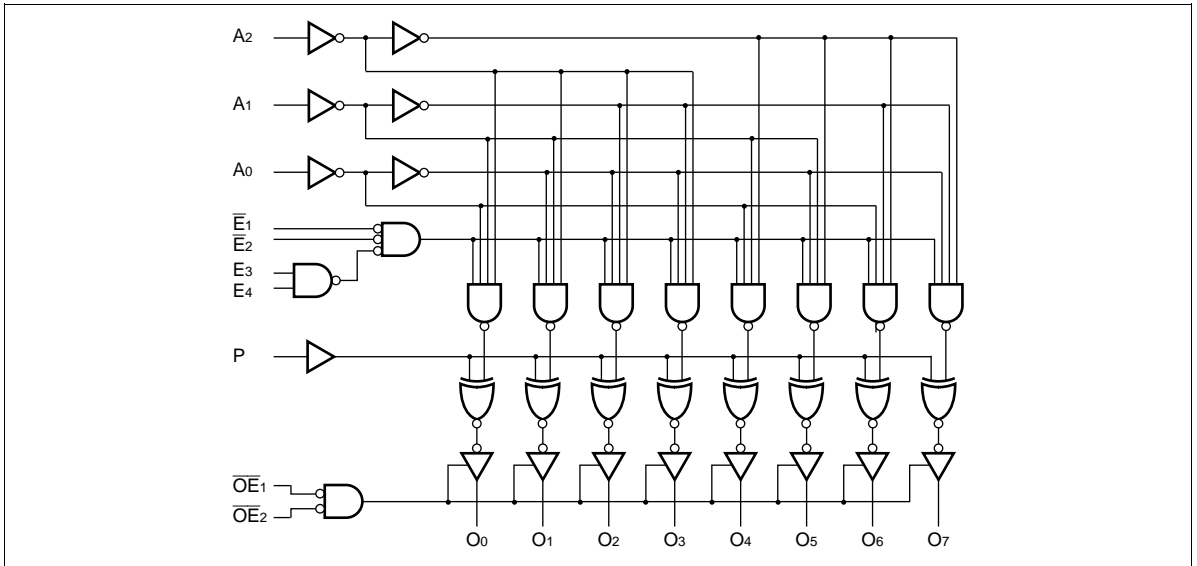

# HD74AC538

## Truth Table

Function	Inputs									Outputs							
	OE <sub>1</sub>	OE <sub>2</sub>	E <sub>1</sub>	E <sub>2</sub>	E <sub>3</sub>	E <sub>4</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>	O <sub>0</sub>	O <sub>1</sub>	O <sub>2</sub>	O <sub>3</sub>	O <sub>4</sub>	O <sub>5</sub>	O <sub>6</sub>	O <sub>7</sub>
High impedance	H	X	X	X	X	X	X	X	X	X	Z	Z	Z	Z	Z	Z	Z
	Z	H	X	X	X	X	X	X	X	Z	Z	Z	Z	Z	Z	Z	Z
Disable	L	L	H	X	X	X	X	X	X	Outputs equal input							
	L	L	X	H	X	X	X	X	X								
	L	L	X	X	L	X	X	X	X								
	L	L	X	X	X	L	X	X	X								
Active HIGH output (P = L)	L	L	L	L	H	H	L	L	L	H	L	L	L	L	L	L	L
	L	L	L	L	H	H	L	L	H	L	H	L	L	L	L	L	L
	L	L	L	L	H	H	L	H	L	L	L	H	L	L	L	L	L
	L	L	L	L	H	H	L	H	H	L	L	L	H	L	L	L	L
	L	L	L	L	H	H	H	L	H	L	L	L	L	L	H	L	L
	L	L	L	L	H	H	H	L	H	L	L	L	L	L	L	H	L
	L	L	L	L	H	H	H	H	L	L	L	L	L	L	L	H	L
	L	L	L	L	H	H	H	H	H	L	L	L	L	L	L	L	H
Active LOW output (P = L)	L	L	L	L	H	H	L	L	L	L	H	H	H	H	H	H	H
	L	L	L	L	H	H	L	L	H	H	L	H	H	H	H	H	H
	L	L	L	L	H	H	L	H	H	H	H	L	H	H	H	H	H
	L	L	L	L	H	H	L	H	H	H	H	H	L	H	H	H	H
	L	L	L	L	H	H	H	L	H	H	H	H	H	H	L	H	H
	L	L	L	L	H	H	H	H	L	H	H	H	H	H	H	L	H
	L	L	L	L	H	H	H	H	L	H	H	H	H	H	H	L	H
	L	L	L	L	H	H	H	H	H	H	H	H	H	H	H	H	L

H : High Voltage Level

L : Low Voltage Level

X : Immaterial

Z : High Impedance

## DC Characteristics (unless otherwise specified)

Item	Symbol	Max	Unit	Condition
Maximum quiescent supply current	I <sub>cc</sub>	80	μA	V <sub>IN</sub> = V <sub>CC</sub> or ground, V <sub>CC</sub> = 5.5 V, Ta = Worst case
Maximum quiescent supply current	I <sub>cc</sub>	8.0	μA	V <sub>IN</sub> = V <sub>CC</sub> or ground, V <sub>CC</sub> = 5.5 V, Ta = 25°C

**HITACHI**





AC Characteristics: HD74AC538

Item	Symbol	V <sub>CC</sub> (V)*1	Ta = +25°C C <sub>L</sub> = 50 pF			Ta = -40°C to +85°C C <sub>L</sub> = 50 pF		Unit
			Min	Typ	Max	Min	Max	
Propagation delay A <sub>n</sub> to O <sub>n</sub>	t <sub>PLH</sub>	3.3	1.0	10.5	17.5	1.0	20.0	ns
		5.0	1.0	8.0	12.5	1.0	14.0	
Propagation delay A <sub>n</sub> to O <sub>n</sub>	t <sub>PHL</sub>	3.3	1.0	9.5	17.5	1.0	20.0	ns
		5.0	1.0	7.0	12.0	1.0	14.0	
Propagation delay E <sub>1</sub> , or E <sub>2</sub> to O <sub>n</sub>	t <sub>PLH</sub>	3.3	1.0	11.0	19.5	1.0	23.0	ns
		5.0	1.0	8.0	14.5	1.0	16.5	
Propagation delay E <sub>1</sub> , or E <sub>2</sub> to O <sub>n</sub>	t <sub>PHL</sub>	3.3	1.0	10.0	19.5	1.0	23.0	ns
		5.0	1.0	8.0	14.0	1.0	16.5	
Propagation delay E <sub>3</sub> , or E <sub>4</sub> to O <sub>n</sub>	t <sub>PLH</sub>	3.3	1.0	11.0	19.5	1.0	23.0	ns
		5.0	1.0	8.5	14.5	1.0	17.0	
Propagation delay E <sub>3</sub> , or E <sub>4</sub> to O <sub>n</sub>	t <sub>PHL</sub>	3.3	1.0	10.5	20.0	1.0	23.5	ns
		5.0	1.0	8.0	15.0	1.0	18.0	
Propagation delay P to O <sub>n</sub>	t <sub>PLH</sub>	3.3	1.0	10.5	15.5	1.0	17.5	ns
		5.0	1.0	9.0	11.0	1.0	12.5	
Propagation delay P to O <sub>n</sub>	t <sub>PHL</sub>	3.3	1.0	9.0	15.0	1.0	17.0	ns
		5.0	1.0	7.5	10.5	1.0	11.5	
Propagation delay OE <sub>n</sub> to O <sub>n</sub>	t <sub>PZH</sub>	3.3	1.0	7.0	14.0	1.0	15.5	ns
		5.0	1.0	5.0	8.5	1.0	9.5	
Propagation delay OE <sub>n</sub> to O <sub>n</sub>	t <sub>PZL</sub>	3.3	1.0	8.5	16.5	1.0	19.0	ns
		5.0	1.0	5.5	9.5	1.0	11.5	
Propagation delay OE <sub>n</sub> to O <sub>n</sub>	t <sub>PHZ</sub>	3.3	1.0	7.0	14.0	1.0	15.5	ns
		5.0	1.0	6.0	10.5	1.0	11.5	
Propagation delay OE <sub>n</sub> to O <sub>n</sub>	t <sub>PLZ</sub>	3.3	1.0	9.0	14.5	1.0	17.0	ns
		5.0	1.0	7.0	10.5	1.0	12.0	




Note: 1. Voltage Range 3.3 is 3.3 V ± 0.3 V  
Voltage Range 5.0 is 5.0 V ± 0.5 V

Capacitance

Item	Symbol	Typ	Unit	Condition
Input capacitance	C <sub>IN</sub>	4.5	pF	V <sub>CC</sub> = 5.5 V
Power dissipation capacitance	C <sub>PD</sub>	100	pF	V <sub>CC</sub> = 5.0 V

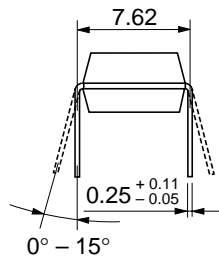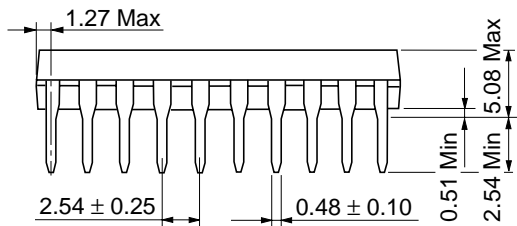

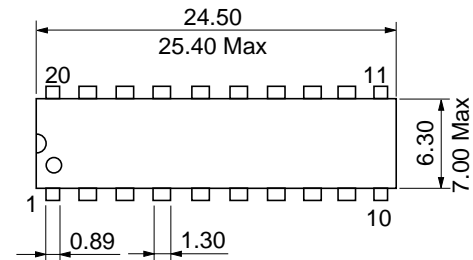


Hitachi Code	DP-20N
JEDEC	—
EIAJ	Conforms
Weight (reference value)	1.26 g

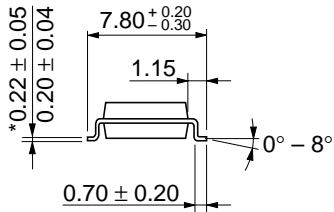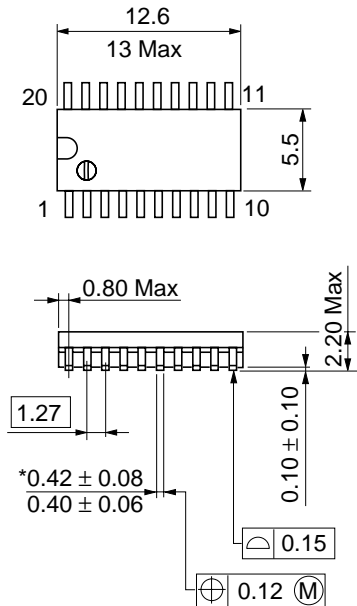

Hitachi Code	FP-20DA
JEDEC	—
EIAJ	Conforms
Weight (reference value)	0.31 g



\*Dimension including the plating thickness  
Base material dimension

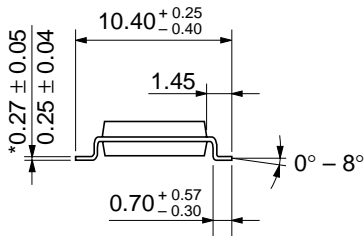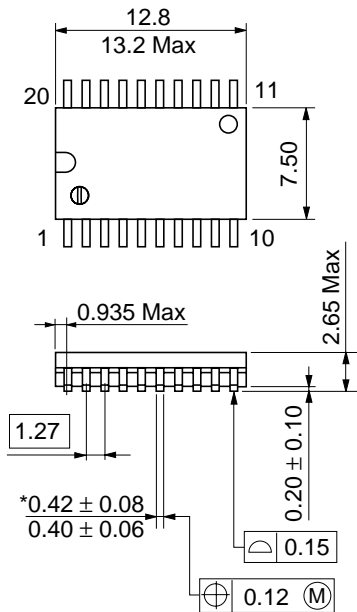

Hitachi Code	FP-20DB
JEDEC	Conforms
EIAJ	—
Weight (reference value)	0.52 g

\*Dimension including the plating thickness  
Base material dimension



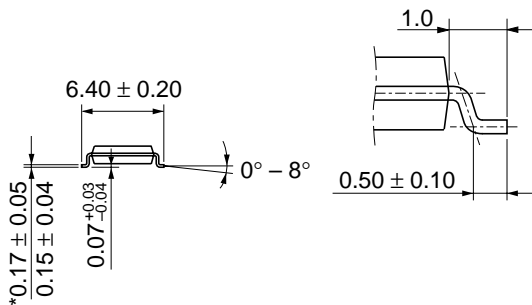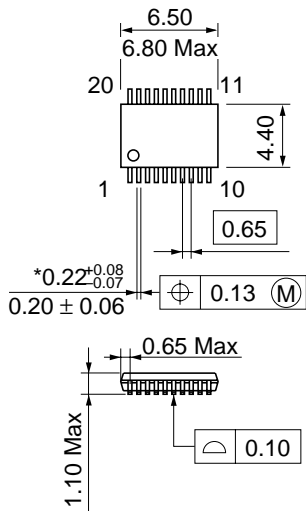

\*Dimension including the plating thickness  
Base material dimension

Hitachi Code	TTP-20DA
JEDEC	—
EIAJ	—
Weight (reference value)	0.07 g

## Cautions

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

# HITACHI

## Hitachi, Ltd.

Semiconductor & Integrated Circuits.  
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan  
Tel: Tokyo (03) 3270-2111 Fax: (03) 3270-5109

URL      North America      : <http://semiconductor.hitachi.com/>  
             Europe                : <http://www.hitachi-eu.com/hel/ecg>  
             Asia (Singapore)      : <http://www.has.hitachi.com.sg/grp3/sicd/index.htm>  
             Asia (Taiwan)            : [http://www.hitachi.com.tw/E/Product/SICD\\_Frame.htm](http://www.hitachi.com.tw/E/Product/SICD_Frame.htm)  
             Asia (HongKong)        : <http://www.hitachi.com.hk/eng/bo/grp3/index.htm>  
             Japan                        : <http://www.hitachi.co.jp/Sicd/indx.htm>

## For further information write to:

Hitachi Semiconductor  
(America) Inc.  
179 East Tasman Drive,  
San Jose, CA 95134  
Tel: <1> (408) 433-1990  
Fax: <1> (408) 433-0223

Hitachi Europe GmbH  
Electronic components Group  
Dornacher Straße 3  
D-85622 Feldkirchen, Munich  
Germany  
Tel: <49> (89) 9 9180-0  
Fax: <49> (89) 9 29 30 00

Hitachi Europe Ltd.  
Electronic Components Group.  
Whitebrook Park  
Lower Cookham Road  
Maidenhead  
Berkshire SL6 8YA, United Kingdom  
Tel: <44> (1628) 585000  
Fax: <44> (1628) 778322

Hitachi Asia Pte. Ltd.  
16 Collyer Quay #20-00  
Hitachi Tower  
Singapore 049318  
Tel: 535-2100  
Fax: 535-1533

Hitachi Asia Ltd.  
Taipei Branch Office  
3F, Hung Kuo Building, No.167,  
Tun-Hwa North Road, Taipei (105)  
Tel: <886> (2) 2718-3666  
Fax: <886> (2) 2718-8180

Hitachi Asia (Hong Kong) Ltd.  
Group III (Electronic Components)  
7/F., North Tower, World Finance Centre,  
Harbour City, Canton Road, Tsim Sha Tsui,  
Kowloon, Hong Kong  
Tel: <852> (2) 735 9218  
Fax: <852> (2) 730 0281  
Telex: 40815 HITEC HX

Copyright ' Hitachi, Ltd., 1999. All rights reserved. Printed in Japan.

## HITACHI