

# PFS

## HIGH EFFICIENCY RECTIFIER

### HER101 THRU HER108

**VOLTAGE RANGE**  
**CURRENT**

**50 to 1000 Volts**  
**1.0Ampere**


DO-41

#### FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:  
260°C/10 secods/.375”(9.5mm)lead length at 5 lbs(2.3kg) tension

#### MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.012ounce, 0.33 grams

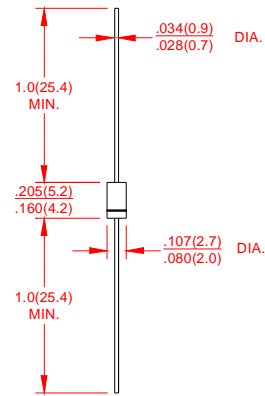

Dimensions in inches and (millimeters)

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%


	SYMBOLS	HER 101	HER 102	HER 103	HER 104	HER 105	HER 106	HER 107	HER 108	UNITS	
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	Volts	
Maximum RMS Voltage	$V_{RMS}$	35	70	140	210	280	420	560	800	Volts	
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	Volts	
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at $T_A=50^\circ C$	$I_{(AV)}$	1.0								Amp	
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30								Amps	
Maximum Instantaneous Forward Voltage @ 1.0A	$V_F$	1.0		1.3		1.5		1.7		Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	$I_R$	$T_A = 25^\circ C$								$\mu A$	
		$T_A = 125^\circ C$									
Maximum Full Load Recovery Current,full cycle average 0.375”(9.5mm)lead length at $T_L=55^\circ C$	$I_{R(AV)}$	100								$\mu A$	
Maximum Reverse Recovery Time (NOTE1)	$t_{rr}$	50					75				ns
Typical Thermal Resistance (NOTE 2)	$C_J$	15					12				PF
Typical Thermal Resistance(NOTE 3)	$R_{\theta JA}$	60								$^\circ C/W$	
Operating Junction Temperature Range	$T_J T_{STG}$	(-55 to +150)								$^\circ C$	

#### Notes:


1. Test Conditions:  $I_f=0.5mA, I_r=1.0mA, I_{rr}=0.25A$
2. Measured at 1 MHz and applied reverse of 4.0 volts.
3. Thermal resistance from junction to ambient with .375”(9.5mm)lead length, P.C.B. mounted.

## RATING AND CHARACTERISTIC CURVES HER101 THRU HER108


**FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE**

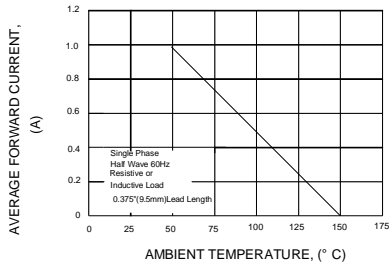


**FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

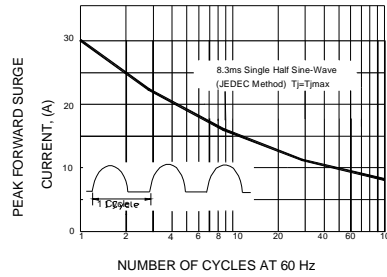


**FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS**

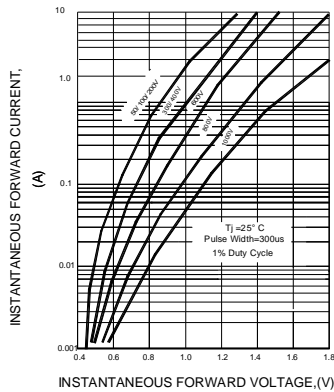

**FIG.4-TYPICAL REVERSE CHARACTERISTICS**

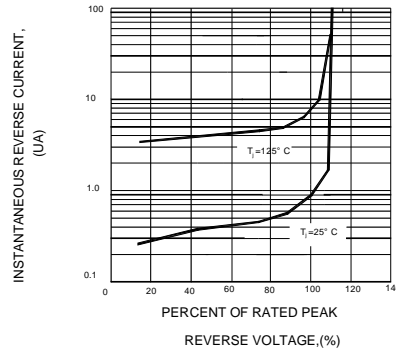

**FIG.5-TYPICAL JUNCTION CAPACITANCE**

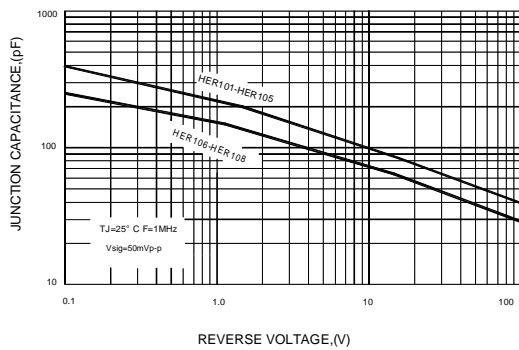

**FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC**

