

HVGT high voltage bridge rectifier is made of high quality glass passivated chip and high reliability epoxy resin sealing structure, and through professional testing equipment inspection qualified after to customers.

**FEATURES:**

1. High reliability design.
2. Large current design.
3. Power frequency ratio.
4. Conform to RoHS.
5. Epoxy resin molded in vacuumHave anticorrosion in the surface.

**APPLICATIONS:**

1. Ignition device power supply.
2. Microwave emission power.
3. General purpose high voltage rectifier.

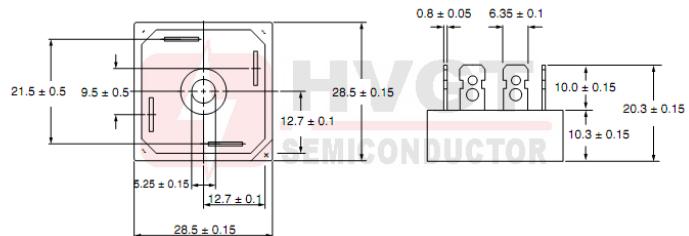
**MECHANICAL DATA:**

1. Case: epoxy resin molding.
2. Terminal: built-in M3 nut.
3. Net weight: 25 grams (approx).

**SHAPE DISPLAY:**

**SIZE: (Unit:mm)**
**HVGT NAME: HVD-34**
**HVD-34 Series**

The terminal is in the form of plug



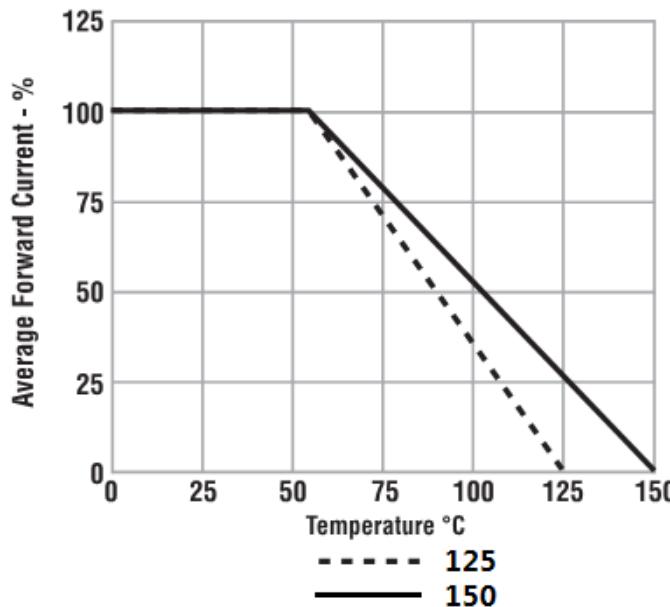
Unit:mm

**MAXIMUM RATINGS AND CHARACTERISTICS: (Absolute Maximum Ratings)**

Items	Symbols	Condition	Data Value	Units
Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	T <sub>a</sub> =25°C;	4.0	kV
Average Output Current	I <sub>o</sub>	T <sub>a</sub> =25°C; Resistive Load	750	mA
Surge Current	I <sub>FSM</sub>	T <sub>a</sub> =25°C; 8.3 mS	15	A
Junction Temperature	T <sub>j</sub>		-55~+150	°C
Allowable Operation Case Temperature	T <sub>c</sub>		125	°C
Storage Temperature	T <sub>STG</sub>		-55~+150	°C

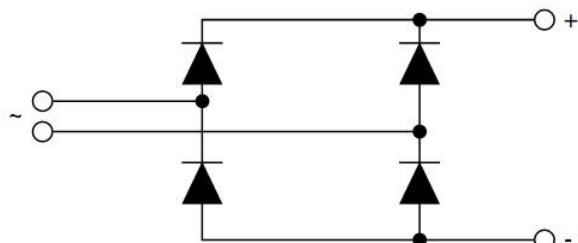
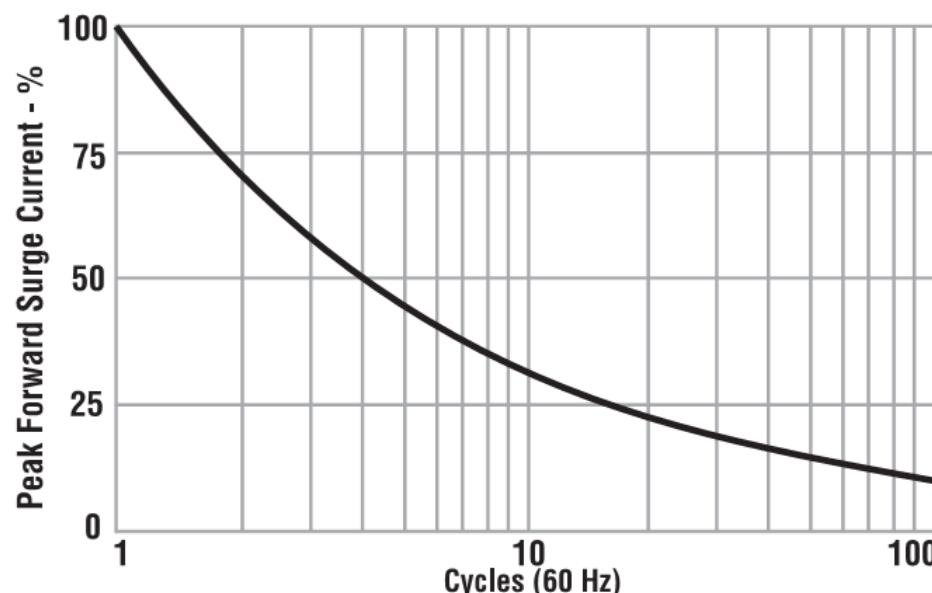
**ELECTRICAL CHARACTERISTICS: T<sub>a</sub>=25°C (Unless otherwise specified)**

Items	Symbols	Condition	Data value	Units
Maximum Forward Voltage Drop	V <sub>f</sub>	at 25°C; I <sub>f</sub> =I <sub>f(AV)</sub>	6.0	V
Maximum Reverse Current	I <sub>r1</sub>	at 25°C; V <sub>r</sub> =V <sub>RRM</sub>	2.0	uA
	I <sub>r2</sub>	at 100°C; V <sub>r</sub> =V <sub>RRM</sub>	50	uA
Maximum Reverse Recovery Time	T <sub>rr</sub>	at 25°C; I <sub>f</sub> =mA; I <sub>r</sub> =mA; I <sub>rr</sub> =mA	--	nS
Junction Capacitance	C <sub>j</sub>	at 25°C; V <sub>r</sub> =0V; f=1MHz	--	pF

**Fig 1**
**Forward Current Derating Curve**


Show average current rating at 55°C,  
unless otherwise specified.

Max operating temperature is 150°C,  
unless otherwise specified.

**Fig 2**
**Circuit Configuration**

**Fig 3**
**Repetitive Surge Current Derating Curve**


This curve represents the percentage of published maximum surge rating as a function of surge repetition.