

# Isc N-Channel MOSFET Transistor


# IPA65R190C7

**• FEATURES**

- With TO-220F package
- Low input capacitance and gate charge
- Reduced switching and conduction losses
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation


**• APPLICATIONS**

- Switching applications

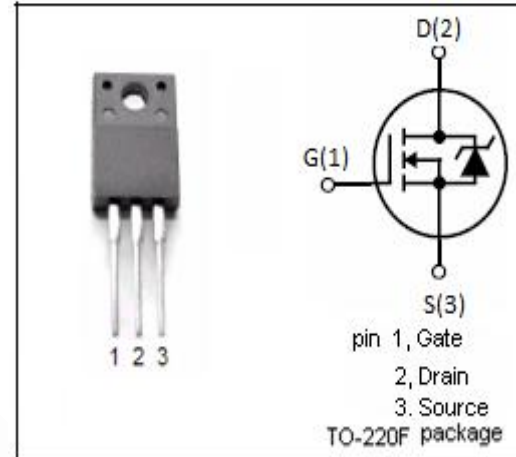

**• ABSOLUTE MAXIMUM RATINGS(T<sub>a</sub>=25°C)**

SYMBOL	PARAMETER	VALUE	UNIT
V <sub>DSS</sub>	Drain-Source Voltage	650	V
V <sub>GSS</sub>	Gate-Source Voltage	±30	V
I <sub>D</sub>	Drain Current-Continuous @T <sub>c</sub> =25°C (V <sub>GS</sub> at 10V) T <sub>c</sub> =100°C	8 5	A
I <sub>DM</sub>	Drain Current-Single Pulsed	49	A
P <sub>D</sub>	Total Dissipation @T <sub>c</sub> =25°C	30	W
T <sub>j</sub>	Max. Operating Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature	-55~150	°C

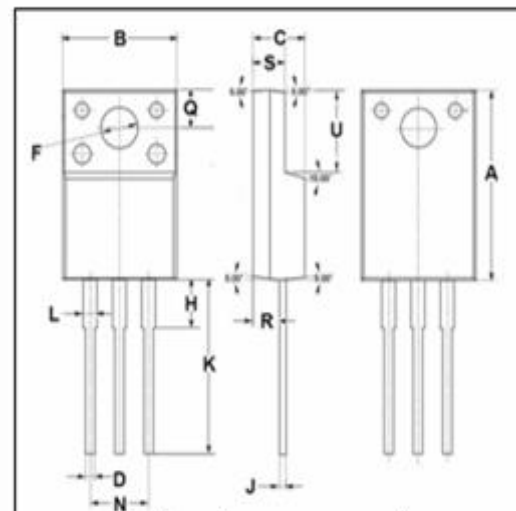

DIM	mm	
	MIN	MAX
A	14.95	15.05
B	10.00	10.10
C	4.40	4.60
D	0.75	0.90
F	3.10	3.30
H	3.70	3.90
J	0.50	0.70
K	13.4	13.6
L	1.10	1.30
N	5.00	5.20
Q	2.70	2.90
R	2.20	2.40
S	2.65	2.90
U	6.40	6.60

**• THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
R <sub>th(ch-c)</sub>	Channel-to-case thermal resistance	4.21	°C/W
R <sub>th(ch-a)</sub>	Channel-to-ambient thermal resistance	80	°C/W

**Isc N-Channel MOSFET Transistor**
**IPA65R190C7**
**ELECTRICAL CHARACTERISTICS**

 T<sub>C</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV <sub>DSS</sub>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V; I <sub>D</sub> =1mA	650			V
V <sub>GS(th)</sub>	Gate Threshold Voltage	V <sub>DS</sub> = V <sub>GS</sub> ; I <sub>D</sub> =0.29mA	3.0		4.0	V
R <sub>DS(on)</sub>	Drain-Source On-Resistance	V <sub>GS</sub> = 10V; I <sub>D</sub> =5.7A		168	190	mΩ
I <sub>GSS</sub>	Gate-Source Leakage Current	V <sub>GS</sub> = ±20V; V <sub>DS</sub> = 0V			±0.1	μA
I <sub>DSS</sub>	Drain-Source Leakage Current	V <sub>DS</sub> = 650V; V <sub>GS</sub> = 0V; T <sub>J</sub> =25°C V <sub>DS</sub> = 650V; V <sub>GS</sub> = 0V; T <sub>J</sub> =150°C			1 100	μA
V <sub>SDF</sub>	Diode forward voltage	I <sub>SD</sub> =5.7A, V <sub>GS</sub> = 0V		0.9		V