


# K1526C & K1536C



9x11 mm, 5.0 or 3.3 Volt, CMOS/TTL, VCXO




### Ordering Information

Product Series	K15X6CX	X	X	00.0000 MHz
Model Selection:	See Electrical Specs			
Temperature Range	Blank: 0°C to +70°C M: -40°C to +85°C			
Symmetry/Logic Compatibility	Blank: TTL/CMOS 40%/60% C: CMOS 45%/55% T: TTL 45%/55%			
Frequency (customer specified)				

- Former **Champion** TECHNOLOGIES, INC. Product
- Phase-Locked Loops (PLL's), Clock Recovery, Reference Signal Tracking, Synthesizers, Frequency Modulation/Demodulation

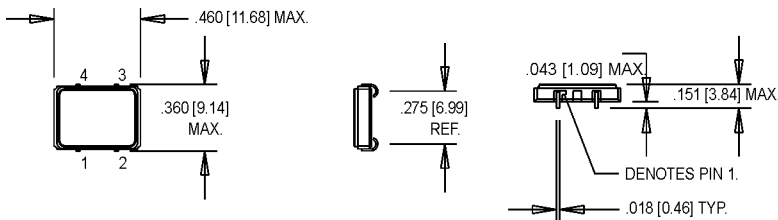

# OBSOLETE



### Pin Connections

PIN	FUNCTION
1	Voltage Control
2	Ground & Gnd Plane
3	Output
4	+Vdd

PARAMETER	Symbol	Min.	Typ.	Max.	Units	Condition/Notes	
Frequency Range	F	55	55.1 to 80	2 to 55	MHz		
Frequency Stability	$\Delta F/F$	Inclusive of Calibration, Temperature, Voltage, Load, and Aging					
Overall		±25	±40	±25	±32	ppm	
0°C to +70°C		±50	±60	±50	±50	ppm	
-40°C to +85°C							
Pullability							
Minimum		±100	±80	±80	±200	ppm	
Maximum		±150	±160	±130		ppm	
<b>PARAMETER</b>							
Operating Temperature	T <sub>A</sub>	(See ordering information)					
Storage Temperature	T <sub>S</sub>	-40		+125	°C		
Aging							
1 <sup>st</sup> Year		-3/-5		+3/+5	ppm	<52 MHz / ≥52 MHz	
Thereafter (per year)		-1/-2		+1/+2	ppm	<52 MHz / ≥52 MHz	
Control Voltage	V <sub>c</sub>	0.5	2.5	4.5	V	K1526C	
		0.3	1.65	3.0	V	K1536C	
		0		5.0	V	K1526CE	
Linearity				10	%	Positive Monotonic Slope	
Modulation Bandwidth	f <sub>m</sub>	20			kHz	+3 dB	
Input Impedance	Z <sub>in</sub>	50K			Ohms	@ 10 kHz	
Input Voltage	V <sub>dd</sub>	4.5	5.0	5.5	V	K1526C	
		3.0	3.3	3.6	V	K1536C	
Input Current	I <sub>dd</sub>			30	mA		
Output Type						CMOS/TTL	
Load				15	pF	HCMOS	
Symmetry (Duty Cycle)		(See ordering information)					
Logic "1" Level	V <sub>oh</sub>	V <sub>dd</sub> - 0.5			V		
Logic "2" Level	V <sub>ol</sub>			0.5	V		
Output Current				20	mA		
Rise/Fall Time	T <sub>r</sub> /T <sub>f</sub>			5	ns	20% to 80% V <sub>dd</sub> , CL = 15 pF	
Start up Time				10	ms		
Phase Jitter @ 26 MHz	φ <sub>J</sub>		4		ps RMS	Integrated 12 kHz – 20 MHz	
Phase Noise (Typical) @ 26 MHz		10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	Offset from carrier
		-65	-95	-115	-130	-140	dBc/Hz
<b>Environmental</b>							
Mechanical Shock	Per MIL-STD-202, Method 213, Condition C (100 g's, 6 mS duration, ½ sinewave)						
Vibration	Per MIL-STD-202, Method 201 & 204 (10 g's from 10-2000 Hz)						
Hermeticity	Per MIL-STD-202, Method 112, (1x10 <sup>-8</sup> atm. cc/s of Helium)						
Thermal Cycle	Per MIL-STD-883, Method 1010, Condition B (-55°C to +125°C, 15 min. dwell, 10 cycles)						
Solderability	Per EIAJ-STD-002						
Soldering Conditions	+240°C max. for 10 secs.						

MtronPTI reserves the right to make changes to the product(s) and service(s) described herein without notice. No liability is assumed as a result of their use or application.

Please see [www.mtronpti.com](http://www.mtronpti.com) for our complete offering and detailed datasheets. Contact us for your application specific requirements: MtronPTI 1-800-762-8800.