



Description



Mechanical Dimensions

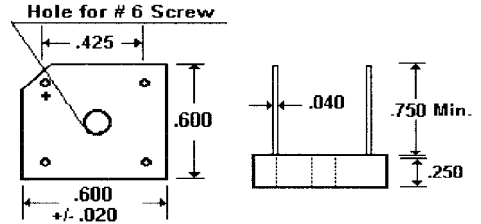

Mechanical Data: Weight - 0.3 Ounces. Mounting Torque - 5.1 lbs. Mounting Position - Any.

Features


- COMPACT SIZE
- LOW LEAKAGE CURRENT
- 150 AMP SURGE OVERLOAD RATING
- MEETS UL SPECIFICATION 94V-0

Electrical Characteristics @ 25°C.	KBPC600...610 Series								Units	
Maximum Ratings	KBPC600	KBPC601	KBPC602	KBPC604	KBPC606	KBPC608	KBPC610			
Peak Repetitive Reverse Voltage... V_{RRM}	50	100	200	400	600	800	1000		Volts	
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	280	420	560	700		Volts	
DC Blocking Voltage... V_{DC}	50	100	200	400	600	800	1000		Volts	
Average Forward Rectified Current... $I_{F(av)}$ $T_c = 50^\circ\text{C}$, Alum. Heat Sink (5.5" x 6.0" x 0.11" Plate)				6.0						Amps
$T_A = 45^\circ\text{C}$, PCB Mounting				3.0						Amps
Non-Repetitive Peak Forward Surge Current... I_{FSM} 8.3 mS Single ½ Sine Wave Imposed on Rated Load				175						Amps
Point Rating for Fusing...(T < 8.3 mS)				127						A ² S
Forward Voltage... V_F Bridge Element @ 3.0 Amps				1.0						Volts
DC Reverse Current... I_R @ Rated DC Blocking Voltage				5.0						μAmps
$T_A = 25^\circ\text{C}$				500						μAmps
$T_A = 125^\circ\text{C}$										
Typical Thermal Resistance... $R_{\theta JC}$ (Alum Heat Sink)				8.0						°C / W / Leg
Typical Junction Capacitance... C_j	<		186	> <		90	>			pF
Operating & Storage Temperature Range... $T_{J'}$, T_{STRG}				-55 to 150						°C


6.0 Amp SINGLE PHASE SILICON BRIDGE

KBPC600 . . . 610 Series


Forward Current Derating Curve

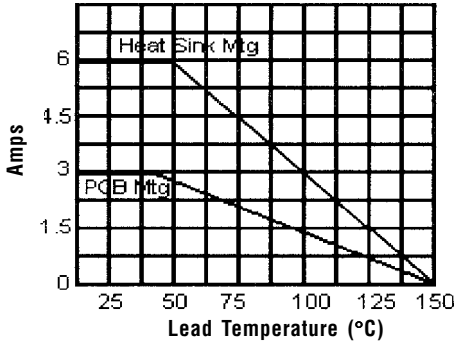


Non-Repetitive Peak Forward Surge Current

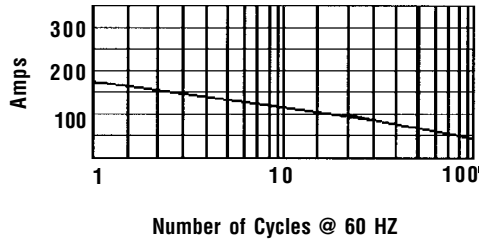


Typical Instantaneous Forward Characteristics

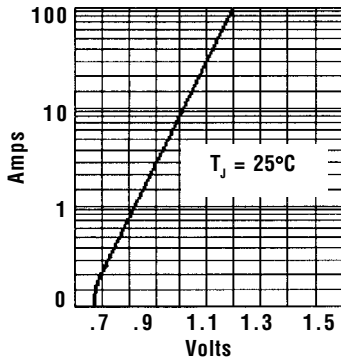


Typical Reverse Characteristics

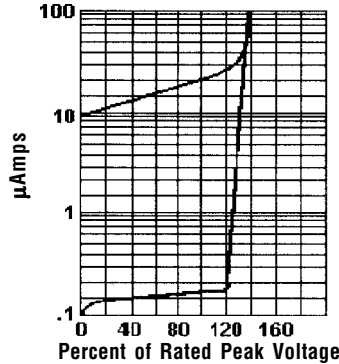

Typical Junction Capacitance

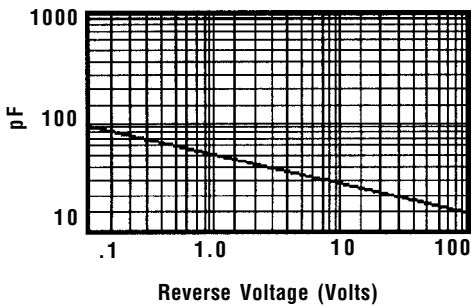

Electrical Description

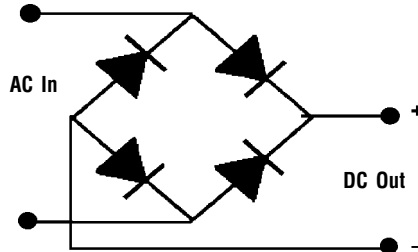

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.