


3A, Very low drop voltage regulators

Features

- Very low dropout voltage (Typ. 0.4 at 3A)
- Guaranteed output current up to 3A
- Fixed voltage with $\pm 1\%$ tolerance at 25°C
- Internal current and thermal limit
- Logic controlled electronic shutdown available in PPAK

Description

The LD29300 is a high current, high accuracy, low-dropout voltage regulator series. These regulators feature 400mV dropout voltage and very low ground current. Designed for high current loads, these devices are also used in lower current, extremely low dropout-critical systems, where their tiny dropout voltage and ground current values are important attributes. Typical applications are in Power supply switching

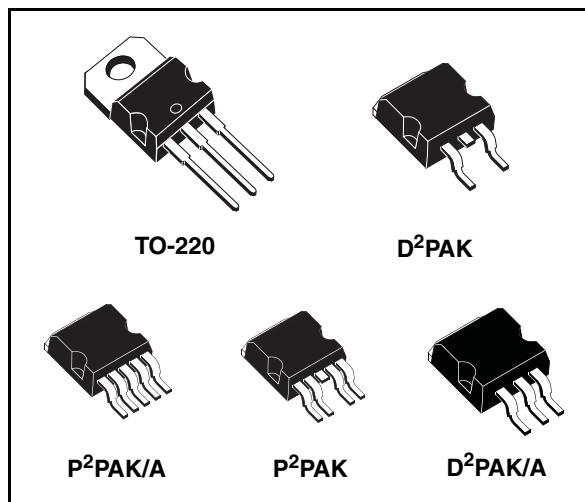

post regulation, Series power supply for monitors, Series power supply for VCRs and TVs, Computer Systems and Battery powered systems.

Order codes

| Part numbers | | | | | Output voltage |
|---------------------------|------------------------------|------------------------------|-----------------------------------|------------------------------|----------------|
| Packages | | | | | |
| TO-220 | D ² PAK | D ² PAK/A | P ² PAK ⁽¹⁾ | P ² PAK/A | |
| LD29300V15 | | | LD29300P2T15R | LD29300P2M15R | 1.5 V |
| | LD29300D2T18R | LD29300D2M18R | LD29300P2T18R | LD29300P2M18R | 1.8 V |
| LD29300V25 | | LD29300D2M25R | | LD29300P2M25R | 2.5 V |
| LD29300V33 | | LD29300D2M33R | LD29300P2T33R | LD29300P2M33R | 3.3 V |
| LD29300V50 | LD29300D2T50R ⁽¹⁾ | LD29300D2M50R | LD29300P2T50R | LD29300P2M50R | 5.0 V |
| | | | LD29300P2T80R | LD29300P2M80R | 8.0 V |
| LD29300V90 ⁽¹⁾ | LD29300D2T90R ⁽¹⁾ | LD29300D2M90R ⁽¹⁾ | LD29300P2T90R | LD29300P2M90R ⁽¹⁾ | 9.0 V |
| | | | LD29300P2TR | LD29300P2MR ⁽¹⁾ | ADJ |


1. Available on request

Contents

| | | |
|---|----------------------------------|----|
| 1 | Diagram | 3 |
| 2 | Pin configuration | 4 |
| 3 | Typical application | 5 |
| 4 | Maximum ratings | 6 |
| 5 | Electrical characteristics | 7 |
| 6 | Typical characteristics | 15 |
| 7 | Package mechanical data | 18 |
| 8 | Revision history | 25 |

2 Pin configuration


Figure 3. Pin connections (top view)

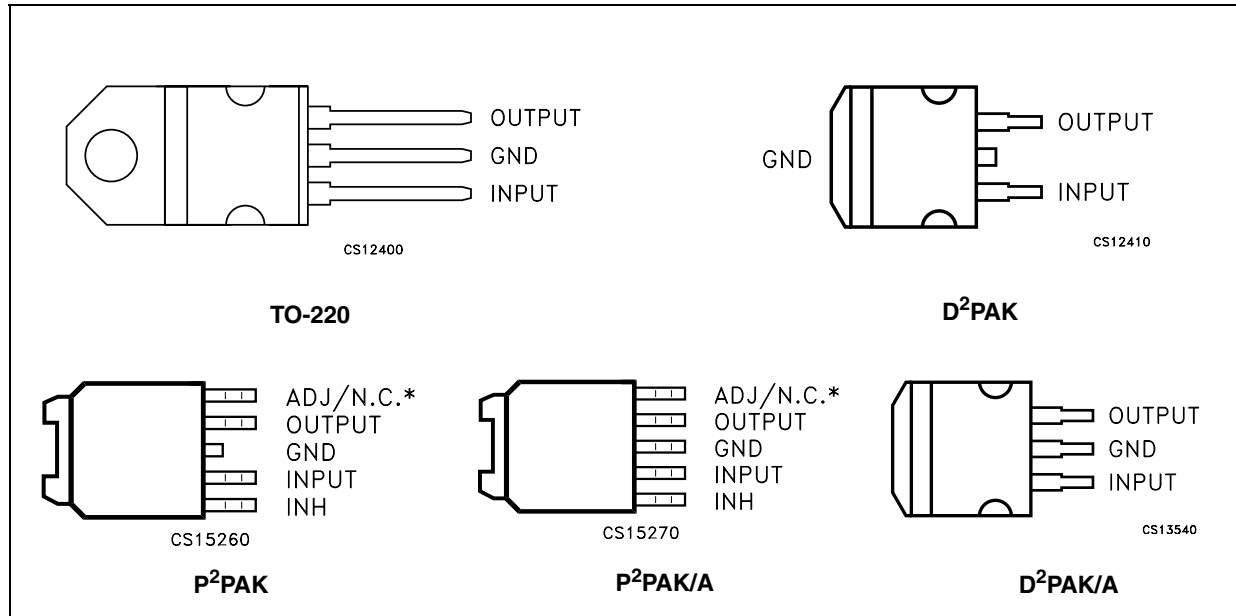

* Not connected for fixed version.

3 Typical application

Figure 4. Application circuit

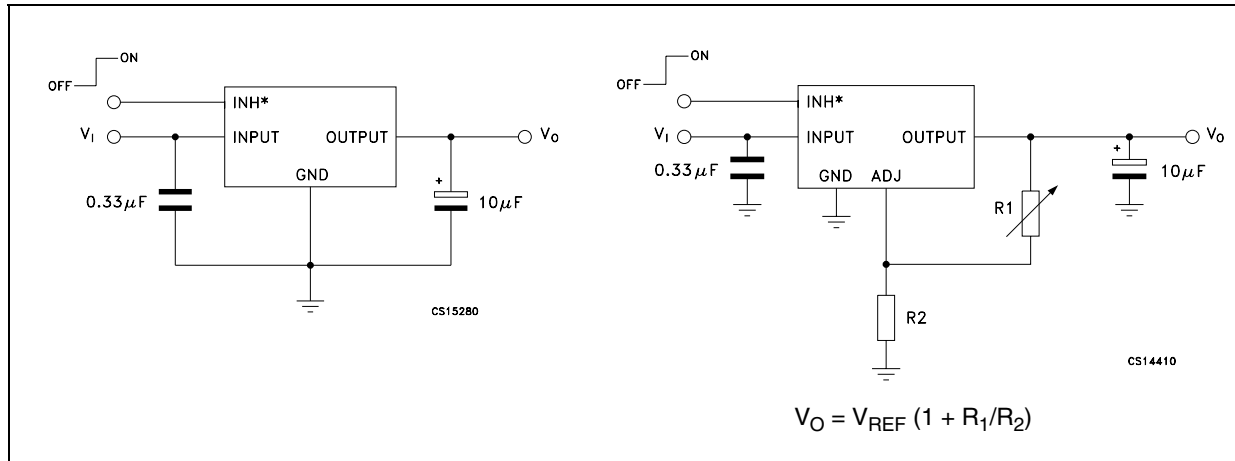

* Only for version with inhibit function.

4 Maximum ratings

Table 1. Absolute maximum ratings

| Symbol | Parameter | Value | Unit |
|-----------|--------------------------------------|--------------------|------|
| V_I | DC Input voltage | 30 ⁽¹⁾ | V |
| I_O | Output current | Internally Limited | mA |
| P_D | Power dissipation | Internally Limited | mW |
| T_{STG} | Storage temperature range | -55 to 150 | °C |
| T_{OP} | Operating junction temperature range | -40 to 125 | °C |

1. Above 14V the device is automatically in shut-down.

Note: Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied.

Table 2. Thermal data

| Symbol | Parameter | TO-220 | D ² PAK-P ² PAK-D ² PAK/A-P ² PAK/A | Unit |
|------------|-------------------------------------|--------|---|------|
| R_{thJA} | Thermal resistance junction-ambient | 50 | 60 | °C/W |
| R_{thJC} | Thermal resistance junction-case | 3 | 3 | °C/W |

5 Electrical characteristics

Table 3. Electrical characteristics of LD29300#15
($I_O = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_I = 3.5\text{V}$, $V_{INH} = 2\text{V}$ (*Note 2*), $C_I = 330\text{nF}$, $C_O = 10\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------------|---|-------|------|-------|----------------------------|
| V_I | Minimum operating input voltage | $I_O = 10\text{mA}$ to 3A , $T_J = -40$ to 125°C | 2.5 | | | V |
| V_O | Output voltage | $I_O = 10\text{mA}$ to 3A , $V_I = 3$ to 7V $T_J = -40$ to 125°C | 1.485 | 1.5 | 1.515 | V |
| | | | 1.47 | | 1.53 | |
| ΔV_O | Load regulation | $I_O = 10\text{mA}$ to 3A | | 0.2 | 1.0 | % |
| ΔV_O | Line regulation | $V_I = 3$ to 13V | | 0.06 | 0.5 | % |
| SVR | Supply voltage rejection | $f = 120\text{ Hz}$, $V_I = 3.5 \pm 1\text{V}$, $I_O = 1.5\text{A}$ (<i>Note: 1</i>) | 65 | 75 | | dB |
| I_q | Quiescent current | $I_O = 1.5\text{A}$, $T_J = -40$ to 125°C | | 20 | 50 | mA |
| | | $I_O = 3\text{A}$, $T_J = -40$ to 125°C | | 45 | 100 | |
| | | $V_I = 13\text{V}$, $V_{INH} = \text{GND}$, $T_J = -40$ to 125°C | | 130 | 180 | μA |
| I_{sc} | Short circuit current | $V_I - V_O = 5.5\text{V}$ | | 4.5 | | A |
| V_{IL} | Control input logic low | OFF MODE, (<i>Note 2</i>), $T_J = -40$ to 125°C | | | 0.8 | V |
| V_{IH} | Control input logic high | ON MODE, (<i>Note 2</i>), $T_J = -40$ to 125°C | 2 | | | V |
| I_{INH} | Control input current | $T_J = -40$ to 125°C , $V_{INH} = 13\text{V}$ | | 5 | 10 | μA |
| eN | Output noise voltage | $B_P = 10\text{Hz}$ to 100KHz , $I_O = 100\text{mA}$ | | 60 | | μV_{RMS} |

- Note: 1 Guaranteed by design.
2 Only for version with Inhibit function.

Table 4. Electrical characteristics of LD29300#18

($I_O = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_I = 3.8\text{V}$, $V_{INH} = 2\text{V}$ (*Note 3*), $C_1 = 330\text{nF}$, $C_O = 10\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|--------------------------|--|-------|------|-------|---------------------|
| V_O | Output voltage | $I_O = 10\text{mA to } 3\text{A}$, $V_I = 3 \text{ to } 7.3\text{V}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 1.782 | 1.8 | 1.818 | V |
| | | | 1.764 | | 1.836 | |
| ΔV_O | Load regulation | $I_O = 10\text{mA to } 3\text{A}$ | | 0.2 | 1.0 | % |
| ΔV_O | Line regulation | $V_I = 3 \text{ to } 13\text{V}$ | | 0.06 | 0.5 | % |
| SVR | Supply voltage rejection | $f = 120 \text{ Hz}$, $V_I = 3.8 \pm 1\text{V}$, $I_O = 1.5\text{A}$ (<i>Note: 1</i>) | 62 | 72 | | dB |
| V_{DROPP} | Dropout voltage | $I_O = 500\text{mA}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.1 | | V |
| | | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.2 | | |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.4 | 0.7 | |
| I_q | Quiescent current | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 20 | 50 | mA |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 45 | 100 | |
| | | $V_I = 13\text{V}$, $V_{INH} = \text{GND}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 130 | 180 | μA |
| I_{sc} | Short circuit current | $V_I - V_O = 5.5\text{V}$ | | 4.5 | | A |
| V_{IL} | Control input logic low | OFF MODE, (<i>Note 3</i>), $T_J = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control input logic high | ON MODE, (<i>Note 3</i>), $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_{INH} | Control input current | $T_J = -40 \text{ to } 125^\circ\text{C}$, $V_{INH} = 13\text{V}$ | | 5 | 10 | μA |
| eN | Output noise voltage | $B_P = 10\text{Hz to } 100\text{kHz}$, $I_O = 100\text{mA}$ | | 60 | | μV_{RMS} |

Note: 1 Guaranteed by design.

2 Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value with $V_O + 1\text{V}$ applied to V_I .

3 Only for version with Inhibit function.

Table 5. Electrical characteristics of LD29300#25

($I_O = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_I = 4.5\text{V}$, $V_{INH} = 2\text{V}$ (*Note 3*), $C_1 = 330\text{nF}$, $C_O = 10\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|--------------------------|--|-------|------|-------|---------------------|
| V_O | Output voltage | $I_O = 10\text{mA to } 3\text{A}$, $V_I = 3.5 \text{ to } 8\text{V}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2.475 | 2.5 | 2.525 | V |
| | | | 2.45 | | 2.55 | |
| ΔV_O | Load regulation | $I_O = 10\text{mA to } 3\text{A}$ | | 0.2 | 1.0 | % |
| ΔV_O | Line regulation | $V_I = 3 \text{ to } 13\text{V}$ | | 0.06 | 0.5 | % |
| SVR | Supply voltage rejection | $f = 120 \text{ Hz}$, $V_I = 4.5 \pm 1\text{V}$, $I_O = 1.5\text{A}$ (<i>Note: 1</i>) | 55 | 70 | | dB |
| V_{DROPP} | Dropout voltage | $I_O = 500\text{mA}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.1 | | V |
| | | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.2 | | |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.4 | 0.7 | |
| I_q | Quiescent current | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 20 | 50 | mA |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 45 | 100 | |
| | | $V_I = 13\text{V}$, $V_{INH} = \text{GND}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 130 | 180 | μA |
| I_{sc} | Short circuit current | $V_I - V_O = 5.5\text{V}$ | | 4.5 | | A |
| V_{IL} | Control input logic low | OFF MODE, (<i>Note 3</i>), $T_J = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control input logic high | ON MODE, (<i>Note 3</i>), $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_{INH} | Control input current | $T_J = -40 \text{ to } 125^\circ\text{C}$, $V_{INH} = 13\text{V}$ | | 5 | 10 | μA |
| eN | Output noise voltage | $B_P = 10\text{Hz to } 100\text{kHz}$, $I_O = 100\text{mA}$ | | 100 | | μV_{RMS} |

Note: 1 Guaranteed by design.

2 Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value with $V_O + 1\text{V}$ applied to V_I .

3 Only for version with Inhibit function.

Table 6. Electrical characteristics of LD29300#33

($I_O = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_I = 5.3\text{V}$, $V_{INH} = 2\text{V}$ (*Note 3*), $C_1 = 330\text{nF}$, $C_O = 10\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|--------------------------|---|-------|------|-------|---------------------|
| V_O | Output voltage | $I_O = 10\text{mA}$ to 3A , $V_I = 4.3$ to 8.8V $T_J = -40$ to 125°C | 3.267 | 3.3 | 3.333 | V |
| | | | 3.234 | | 3.366 | |
| ΔV_O | Load regulation | $I_O = 10\text{mA}$ to 3A | | 0.2 | 1.0 | % |
| ΔV_O | Line regulation | $V_I = 4.3$ to 13V | | 0.06 | 0.5 | % |
| SVR | Supply voltage rejection | $f = 120\text{ Hz}$, $V_I = 5.3 \pm 1\text{V}$, $I_O = 1.5\text{A}$ (<i>Note: 1</i>) | 52 | 67 | | dB |
| V_{DROPP} | Dropout voltage | $I_O = 500\text{mA}$, $T_J = -40$ to 125°C (<i>Note 2</i>) | | 0.1 | | V |
| | | $I_O = 1.5\text{A}$, $T_J = -40$ to 125°C (<i>Note 2</i>) | | 0.2 | | |
| | | $I_O = 3\text{A}$, $T_J = -40$ to 125°C (<i>Note 2</i>) | | 0.4 | 0.7 | |
| I_q | Quiescent current | $I_O = 1.5\text{A}$, $T_J = -40$ to 125°C | | 20 | 50 | mA |
| | | $I_O = 3\text{A}$, $T_J = -40$ to 125°C | | 45 | 100 | |
| | | $V_I = 13\text{V}$, $V_{INH} = \text{GND}$, $T_J = -40$ to 125°C | | 130 | 180 | μA |
| I_{sc} | Short circuit current | $V_I - V_O = 5.5\text{V}$ | | 4.5 | | A |
| V_{IL} | Control input logic low | OFF MODE, (<i>Note 3</i>), $T_J = -40$ to 125°C | | | 0.8 | V |
| V_{IH} | Control input logic high | ON MODE, (<i>Note 3</i>), $T_J = -40$ to 125°C | 2 | | | V |
| I_{INH} | Control input current | $T_J = -40$ to 125°C , $V_{INH} = 13\text{V}$ | | 5 | 10 | μA |
| eN | Output noise voltage | $B_P = 10\text{Hz}$ to 100kHz , $I_O = 100\text{mA}$ | | 132 | | μV_{RMS} |

Note: 1 Guaranteed by design.

2 Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value with $V_O + 1\text{V}$ applied to V_I .

3 Only for version with Inhibit function.

Table 7. Electrical characteristics of LD29300#50

($I_O = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_I = 7\text{V}$, $V_{INH} = 2\text{V}$ (*Note 3*), $C_I = 330\text{nF}$, $C_O = 10\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|--------------------------|---|------|------|------|---------------------|
| V_O | Output voltage | $I_O = 10\text{mA to } 3\text{A}$, $V_I = 6 \text{ to } 10.5\text{V}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 4.95 | 5 | 5.05 | V |
| | | | 4.9 | | 5.1 | |
| ΔV_O | Load regulation | $I_O = 10\text{mA to } 3\text{A}$ | | 0.2 | 1.0 | % |
| ΔV_O | Line regulation | $V_I = 6 \text{ to } 13\text{V}$ | | 0.06 | 0.5 | % |
| SVR | Supply voltage rejection | $f = 120 \text{ Hz}$, $V_I = 7 \pm 1\text{V}$, $I_O = 1.5\text{A}$ (<i>Note: 1</i>) | 49 | 64 | | dB |
| V_{DROPP} | Dropout voltage | $I_O = 500\text{mA}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.1 | | V |
| | | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.2 | | |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.4 | 0.7 | |
| I_q | Quiescent current | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 20 | 50 | mA |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 45 | 100 | |
| | | $V_I = 13\text{V}$, $V_{INH} = \text{GND}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 130 | 180 | μA |
| I_{sc} | Short circuit current | $V_I - V_O = 5.5\text{V}$ | | 4.5 | | A |
| V_{IL} | Control input logic low | OFF MODE, (<i>Note 3</i>), $T_J = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control input logic high | ON MODE, (<i>Note 3</i>), $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_{INH} | Control input current | $T_J = -40 \text{ to } 125^\circ\text{C}$, $V_{INH} = 13\text{V}$ | | 5 | 10 | μA |
| eN | Output noise voltage | $B_P = 10\text{Hz to } 100\text{kHz}$, $I_O = 100\text{mA}$ | | 200 | | μV_{RMS} |

Note: 1 Guaranteed by design.

2 Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value with $V_O + 1\text{V}$ applied to V_I .

3 Only for version with Inhibit function.

Table 8. Electrical characteristics of LD29300#80

($I_O = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_I = 10\text{V}$, $V_{INH} = 2\text{V}$ (*Note 3*), $C_I = 330\text{nF}$, $C_O = 10\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|--------------------------|---|------|------|------|---------------------|
| V_O | Output voltage | $I_O = 10\text{mA to } 3\text{A}$, $V_I = 9 \text{ to } 13\text{V}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 7.92 | 8 | 8.08 | V |
| | | | 7.84 | | 8.16 | |
| ΔV_O | Load regulation | $I_O = 10\text{mA to } 3\text{A}$ | | 0.2 | 1.0 | % |
| ΔV_O | Line regulation | $V_I = 9 \text{ to } 13\text{V}$ | | 0.06 | 0.5 | % |
| SVR | Supply voltage rejection | $f = 120 \text{ Hz}$, $V_I = 9 \pm 1\text{V}$, $I_O = 1.5\text{A}$ (<i>Note: 1</i>) | 45 | 59 | | dB |
| V_{DROPP} | Dropout voltage | $I_O = 500\text{mA}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.1 | | V |
| | | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.2 | | |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (<i>Note 2</i>) | | 0.4 | 0.7 | |
| I_q | Quiescent current | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 20 | 50 | mA |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 45 | 100 | |
| | | $V_I = 13\text{V}$, $V_{INH} = \text{GND}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 130 | 180 | μA |
| I_{sc} | Short circuit current | $V_I - V_O = 5.5\text{V}$ | | 4.5 | | A |
| V_{IL} | Control input logic low | OFF MODE, (<i>Note 3</i>), $T_J = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control input logic high | ON MODE, (<i>Note 3</i>), $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_{INH} | Control input current | $T_J = -40 \text{ to } 125^\circ\text{C}$, $V_{INH} = 13\text{V}$ | | 5 | 10 | μA |
| eN | Output noise voltage | $B_P = 10\text{Hz to } 100\text{KHz}$, $I_O = 100\text{mA}$ | | 320 | | μV_{RMS} |

Note: 1 Guaranteed by design.

2 Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value with $V_O + 1\text{V}$ applied to V_I .

3 Only for version with Inhibit function.

Table 9. Electrical characteristics of LD29300#90

($I_O = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_I = 11\text{V}$, $V_{INH} = 2\text{V}$ (Note 3), $C_I = 330\text{nF}$, $C_O = 10\mu\text{F}$, unless otherwise specified)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|--------------------------|--|------|------|------|---------------------|
| V_O | Output voltage | $I_O = 10\text{mA to } 3\text{A}$, $V_I = 10 \text{ to } 13\text{V}$ $T_J = -40 \text{ to } 125^\circ\text{C}$ | 8.91 | 9 | 9.09 | V |
| | | | 8.82 | | 9.18 | |
| ΔV_O | Load regulation | $I_O = 10\text{mA to } 3\text{A}$ | | 0.2 | 1.0 | % |
| ΔV_O | Line regulation | $V_I = 10 \text{ to } 13\text{V}$ | | 0.06 | 0.5 | % |
| SVR | Supply voltage rejection | $f = 120 \text{ Hz}$, $V_I = 11 \pm 1\text{V}$, $I_O = 1.5\text{A}$ (Note 1) | 45 | 58 | | dB |
| V_{DROPP} | Dropout voltage | $I_O = 500\text{mA}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (Note 2) | | 0.1 | | V |
| | | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (Note 2) | | 0.2 | | |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ (Note 2) | | 0.4 | 0.7 | |
| I_q | Quiescent current | $I_O = 1.5\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 20 | 50 | mA |
| | | $I_O = 3\text{A}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 50 | 100 | |
| | | $V_I = 13\text{V}$, $V_{INH} = \text{GND}$, $T_J = -40 \text{ to } 125^\circ\text{C}$ | | 130 | 180 | μA |
| I_{sc} | Short circuit current | $V_I - V_O = 5.5\text{V}$ | | 4.5 | | A |
| V_{IL} | Control input logic low | OFF MODE, (Note 3), $T_J = -40 \text{ to } 125^\circ\text{C}$ | | | 0.8 | V |
| V_{IH} | Control input logic high | ON MODE, (Note 3), $T_J = -40 \text{ to } 125^\circ\text{C}$ | 2 | | | V |
| I_{INH} | Control input current | $T_J = -40 \text{ to } 125^\circ\text{C}$, $V_{INH} = 13\text{V}$ | | 5 | 10 | μA |
| eN | Output noise voltage | $B_P = 10\text{Hz to } 100\text{kHz}$, $I_O = 100\text{mA}$ | | 360 | | μV_{RMS} |

Note: 1 Guaranteed by design.

2 Dropout voltage is defined as the input-to-output differential when the output voltage drops to 99% of its nominal value with V_{O+1V} applied to V_I .

3 Only for version with Inhibit function.

Table 10. Electrical characteristics of LD29300#ADJ

($I_O = 10\text{mA}$, $T_J = 25^\circ\text{C}$, $V_I = 3.23\text{V}$, $V_{INH} = 2\text{V}$ (Note 3), $C_I = 330\text{nF}$, $C_O = 10\mu\text{F}$ adjust pin tied to output pin)

| Symbol | Parameter | Test conditions | Min. | Typ. | Max. | Unit |
|--------------|---------------------------------|--|------|------|------|---------------------|
| V_I | Minimum operating input voltage | $I_O = 10\text{mA}$ to 3A , $T_J = -40$ to 125°C | 2.5 | | | V |
| ΔV_O | Load regulation | $I_O = 10\text{mA}$ to 3A | | 0.2 | 1.0 | % |
| ΔV_O | Line regulation | $V_I = 2.5\text{V}$ to 13V | | 0.06 | 0.5 | % |
| V_{REF} | Reference voltage | $I_O = 10\text{mA}$ to 3A , $V_I = 2.5$ to 4.5V $T_J = -40$ to 125°C (Note 2) | -1% | 1.23 | +1% | V |
| | | | -2% | | +2% | |
| SVR | Supply voltage rejection | $f = 120\text{Hz}$, $V_I = 3.23 \pm 1\text{V}$, $I_O = 1.5\text{A}$ (Note 1) | 65 | 75 | | dB |
| I_q | Quiescent current | $I_O = 1.5\text{A}$, $T_J = -40$ to 125°C | | 20 | 50 | mA |
| | | $I_O = 3\text{A}$, $T_J = -40$ to 125°C | | 45 | 100 | |
| | | $V_I = 13\text{V}$, $V_{INH} = \text{GND}$, $T_J = -40$ to 125°C | | 130 | 180 | μA |
| I_{ADJ} | Adjust pin current | $T_J = -40$ to 125°C (Note 1) | | | 1 | μA |
| I_{sc} | Short circuit current | $V_I - V_O = 5.5\text{V}$ | | 4.5 | | A |
| V_{IL} | Control input logic low | OFF MODE, (Note 3), $T_J = -40$ to 125°C | | | 0.8 | V |
| V_{IH} | Control input logic high | ON MODE, (Note 3), $T_J = -40$ to 125°C | 2 | | | V |
| I_{INH} | Control input current | $T_J = -40$ to 125°C , $V_{INH} = 13\text{V}$ | | 5 | 10 | μA |
| eN | Output noise voltage | $B_P = 10\text{Hz}$ to 100KHz , $I_O = 100\text{mA}$ | | 50 | | μV_{RMS} |

Note: 1 Guaranteed by design.

2 Reference voltage is measured between output and GND pin, with ADJ PIN tied to V_{OUT} .

3 Only for version with Inhibit function.

6 Typical characteristics

Figure 5. Output voltage vs temperature

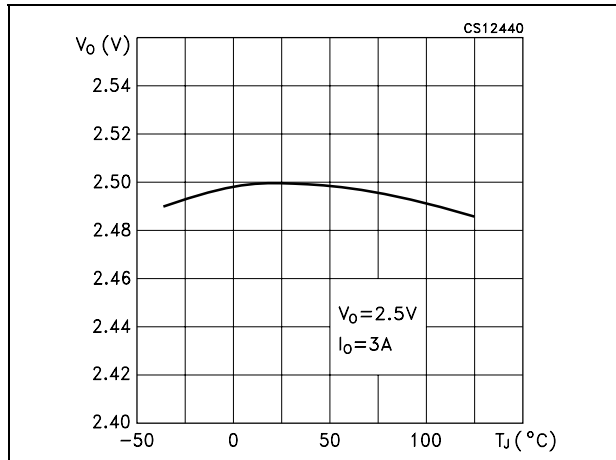


Figure 6. Dropout voltage vs temperature

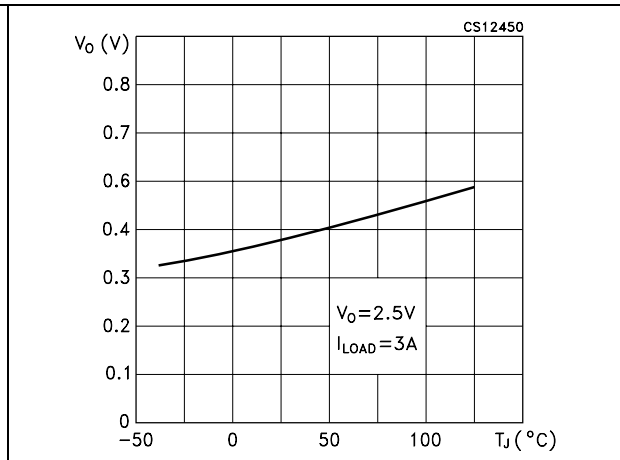


Figure 7. Dropout voltage vs output current

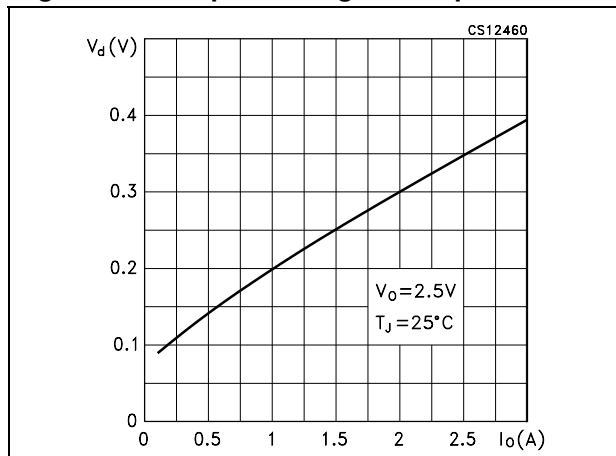


Figure 8. Quiescent current vs output current

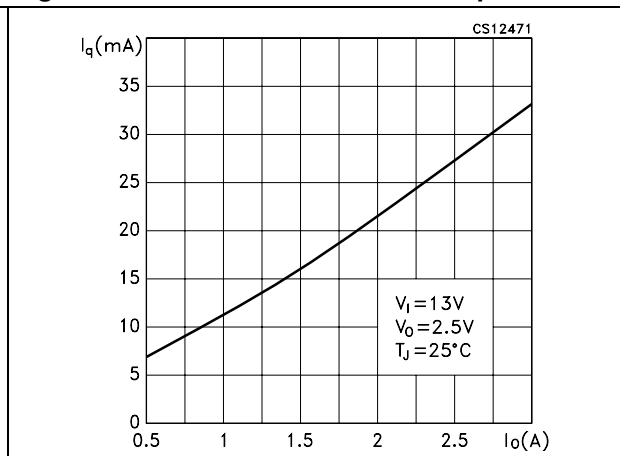


Figure 9. Quiescent current vs output current

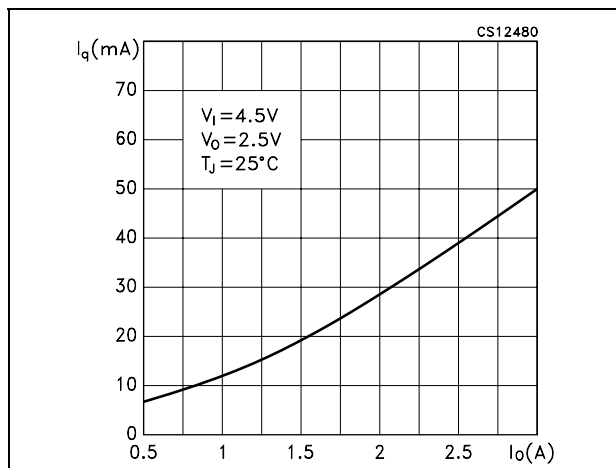


Figure 10. Quiescent current vs supply voltage

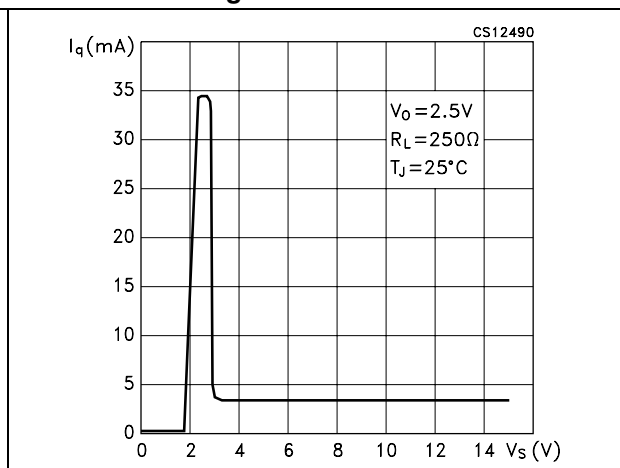


Figure 11. Quiescent current vs temperature

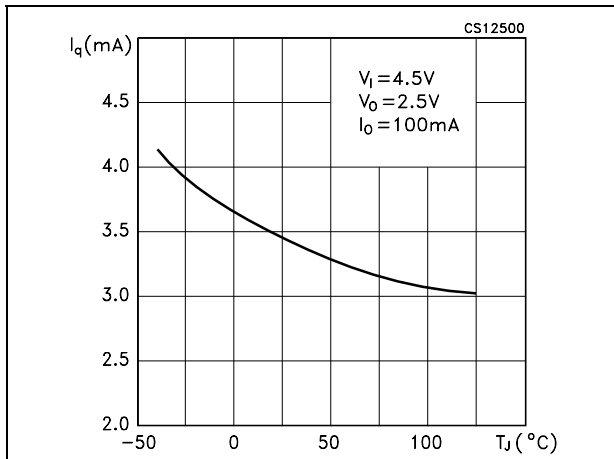


Figure 12. Quiescent current vs temperature

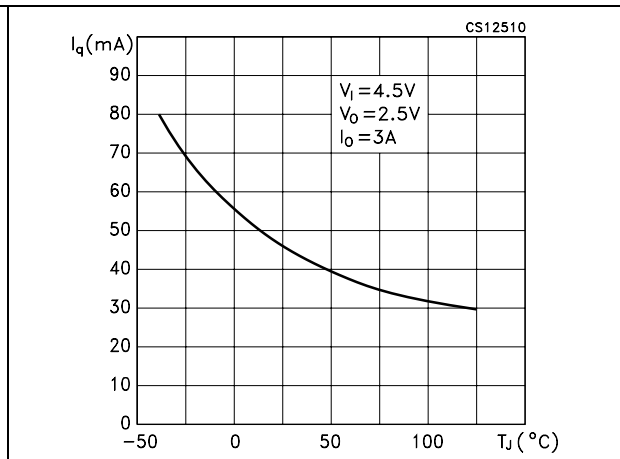


Figure 13. Short circuit current vs temperature Figure 14. Supply voltage rejection vs temperature

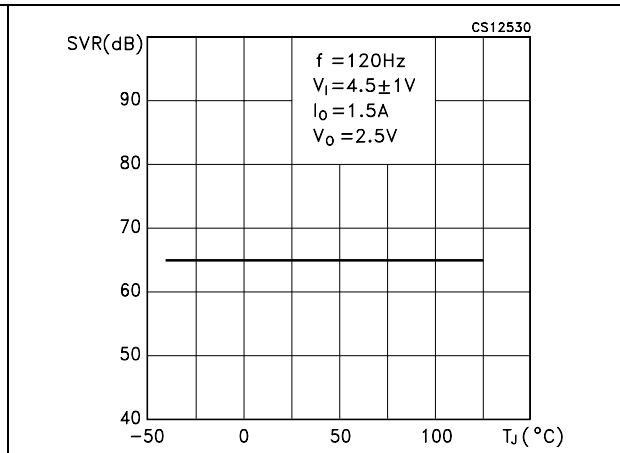
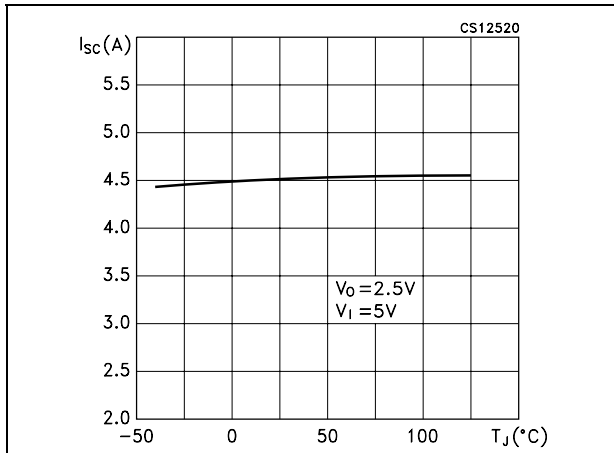


Figure 15. Stability vs Co

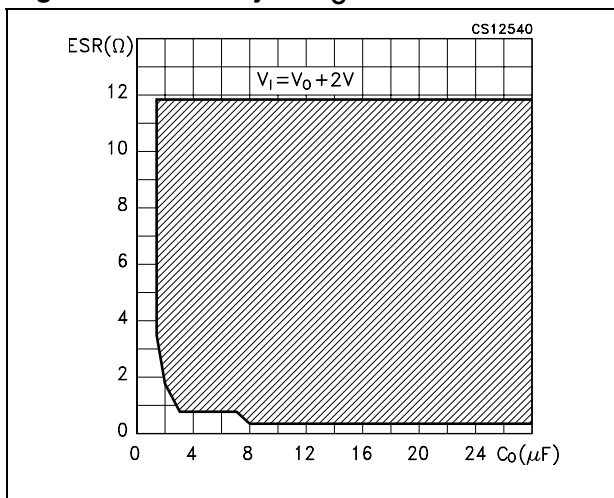


Figure 16. Line transient


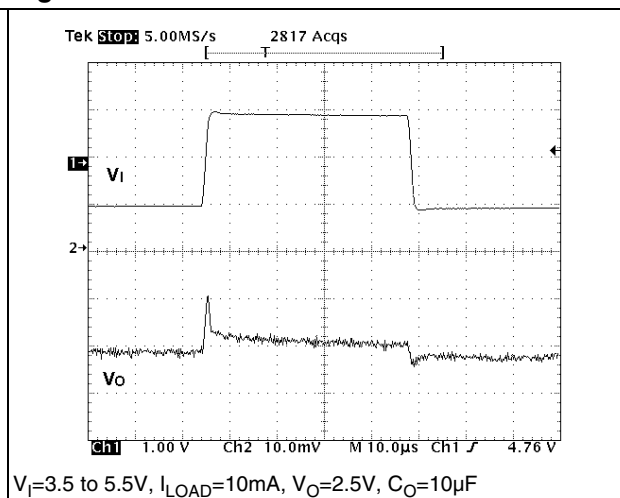


Figure 17. Load transient

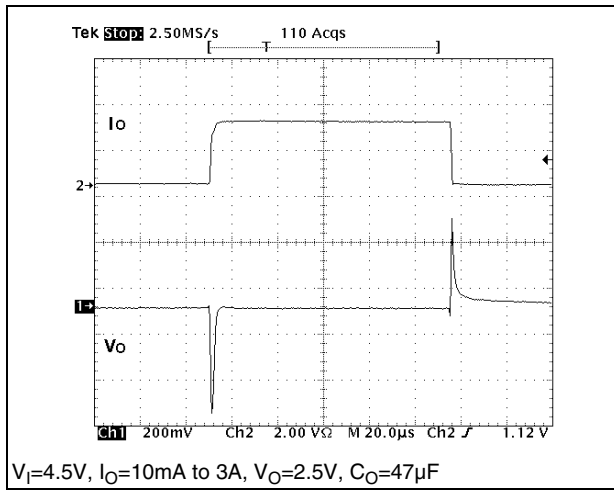


7 Package mechanical data

In order to meet environmental requirements, ST offers these devices in ECOPACK[®] packages. These packages have a Lead-free second level interconnect. The category of second Level Interconnect is marked on the package and on the inner box label, in compliance with JEDEC Standard JESD97. The maximum ratings related to soldering conditions are also marked on the inner box label. ECOPACK is an ST trademark. ECOPACK specifications are available at: www.st.com.


TO-220 (A TYPE) MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|-------|------|-------|-------|-------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| b | 0.61 | | 0.88 | 0.024 | | 0.034 |
| b1 | 1.15 | | 1.70 | 0.045 | | 0.067 |
| c | 0.49 | | 0.70 | 0.019 | | 0.027 |
| D | 15.25 | | 15.75 | 0.600 | | 0.620 |
| E | 10.0 | | 10.40 | 0.393 | | 0.409 |
| e | 2.4 | | 2.7 | 0.094 | | 0.106 |
| e1 | 4.95 | | 5.15 | 0.194 | | 0.203 |
| F | 1.23 | | 1.32 | 0.048 | | 0.051 |
| H1 | 6.2 | | 6.6 | 0.244 | | 0.260 |
| J1 | 2.40 | | 2.72 | 0.094 | | 0.107 |
| L | 13.0 | | 14.0 | 0.511 | | 0.551 |
| L1 | 3.5 | | 3.93 | 0.137 | | 0.154 |
| L20 | | 16.4 | | | 0.645 | |
| L30 | | 28.9 | | | 1.138 | |
| φP | 3.75 | | 3.85 | 0.147 | | 0.151 |
| Q | 2.65 | | 2.95 | 0.104 | | 0.116 |

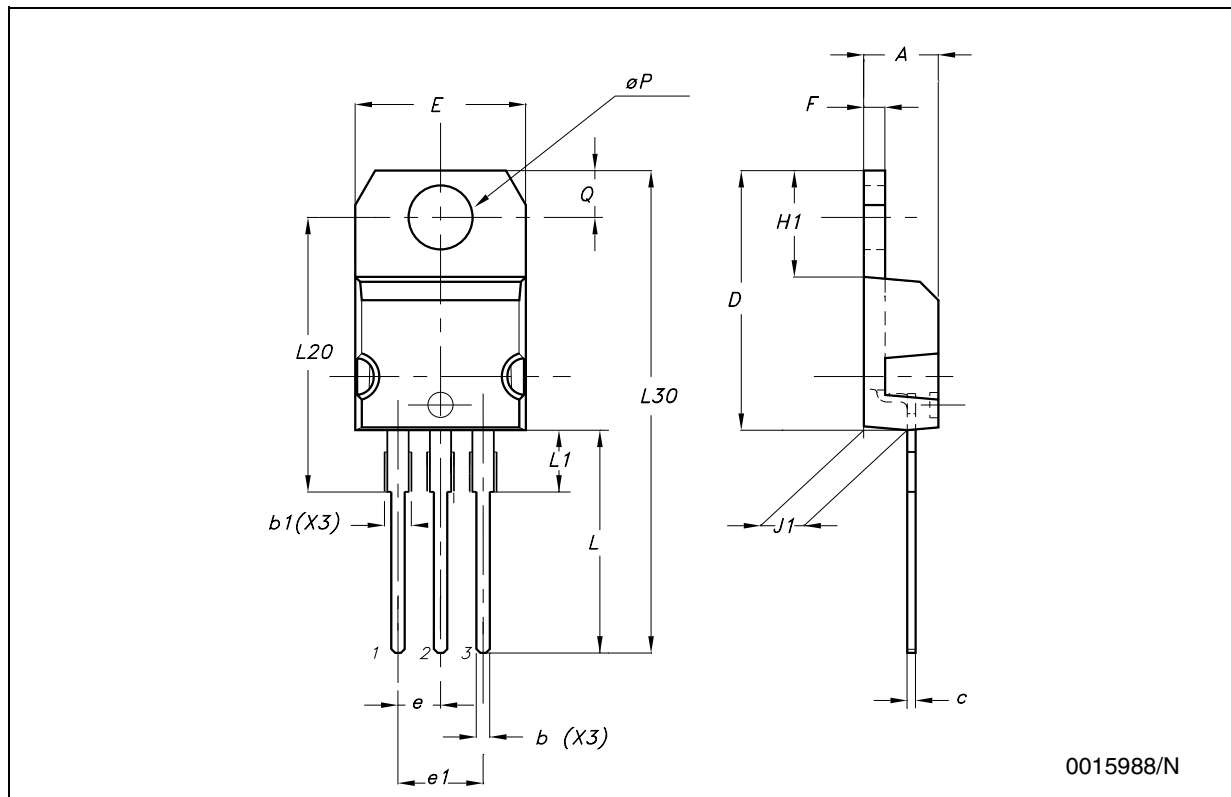


D²PAK MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|-----|-------|-------|-------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | 4.4 | | 4.6 | 0.173 | | 0.181 |
| A1 | 2.49 | | 2.69 | 0.098 | | 0.106 |
| A2 | 0.03 | | 0.23 | 0.001 | | 0.009 |
| B | 0.7 | | 0.93 | 0.027 | | 0.036 |
| B2 | 1.14 | | 1.7 | 0.044 | | 0.067 |
| C | 0.45 | | 0.6 | 0.017 | | 0.023 |
| C2 | 1.23 | | 1.36 | 0.048 | | 0.053 |
| D | 8.95 | | 9.35 | 0.352 | | 0.368 |
| D1 | | 8 | | | 0.315 | |
| E | 10 | | 10.4 | 0.393 | | 0.409 |
| E1 | | 8.5 | | | 0.335 | |
| G | 4.88 | | 5.28 | 0.192 | | 0.208 |
| L | 15 | | 15.85 | 0.590 | | 0.624 |
| L2 | 1.27 | | 1.4 | 0.050 | | 0.055 |
| L3 | 1.4 | | 1.75 | 0.055 | | 0.068 |
| M | 2.4 | | 3.2 | 0.094 | | 0.126 |
| R | | 0.4 | | | 0.016 | |
| V2 | 0° | | 8° | 0° | | 8° |

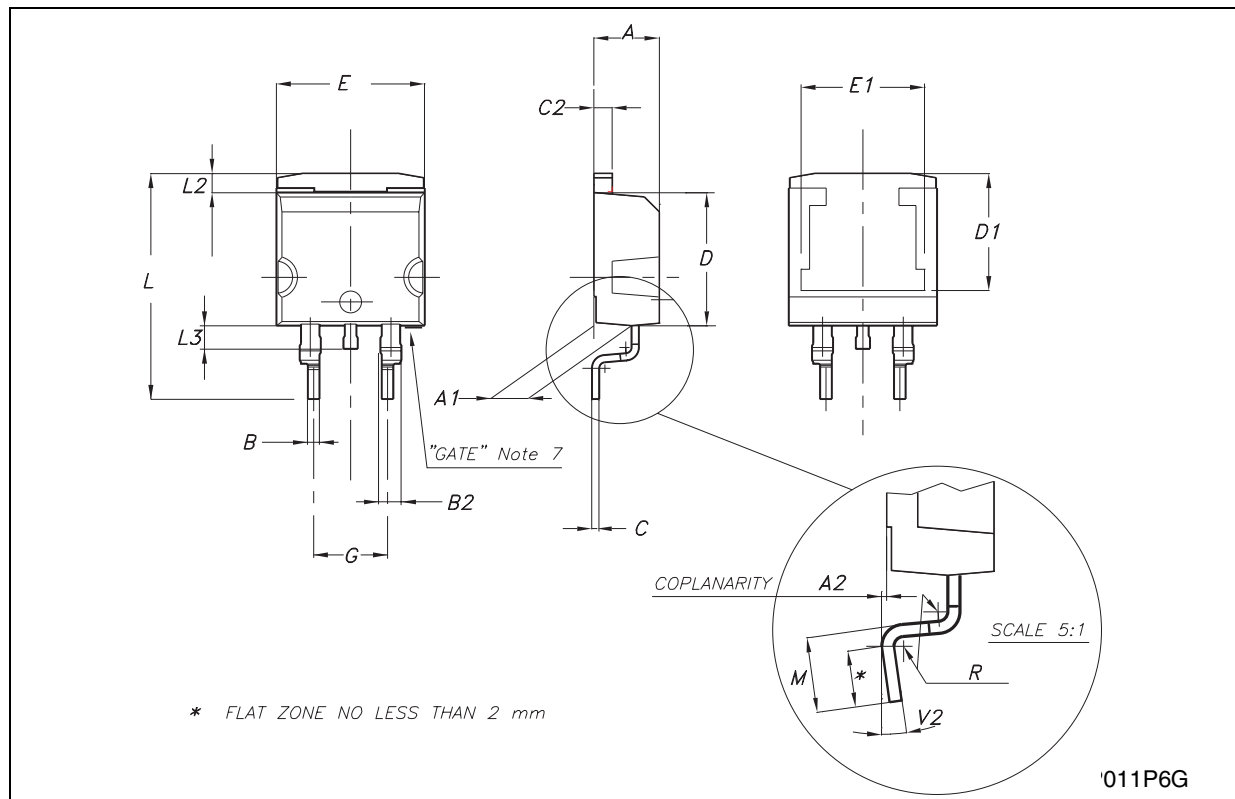


D²PAK/A MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|------|-----|-------|-------|-------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | 4.40 | | 4.60 | 0.173 | | 0.181 |
| A1 | 2.49 | | 2.69 | 0.098 | | 0.106 |
| A2 | 0.03 | | 0.23 | 0.001 | | 0.009 |
| B | 0.7 | | 0.93 | 0.028 | | 0.037 |
| B1 | 0.8 | | 1.3 | 0.031 | | 0.051 |
| B2 | 1.14 | | 1.7 | 0.045 | | 0.067 |
| C | 0.45 | | 0.60 | 0.018 | | 0.024 |
| C2 | 1.23 | | 1.36 | 0.048 | | 0.054 |
| D | 8.95 | | 9.35 | 0.352 | | 0.368 |
| D1 | | 8 | | | 0.315 | |
| E | 10 | | 10.4 | 0.394 | | 0.409 |
| E1 | | 8.5 | | | 0.335 | |
| G | 4.88 | | 5.28 | 0.192 | | 0.208 |
| L | 15 | | 15.85 | 0.591 | | 0.624 |
| L2 | 1.27 | | 1.4 | 0.050 | | 0.055 |
| M | 2.4 | | 3.2 | 0.094 | | 0.126 |
| R | | 0.4 | | | 0.016 | |
| V2 | 0° | | 8° | 0° | | 8° |

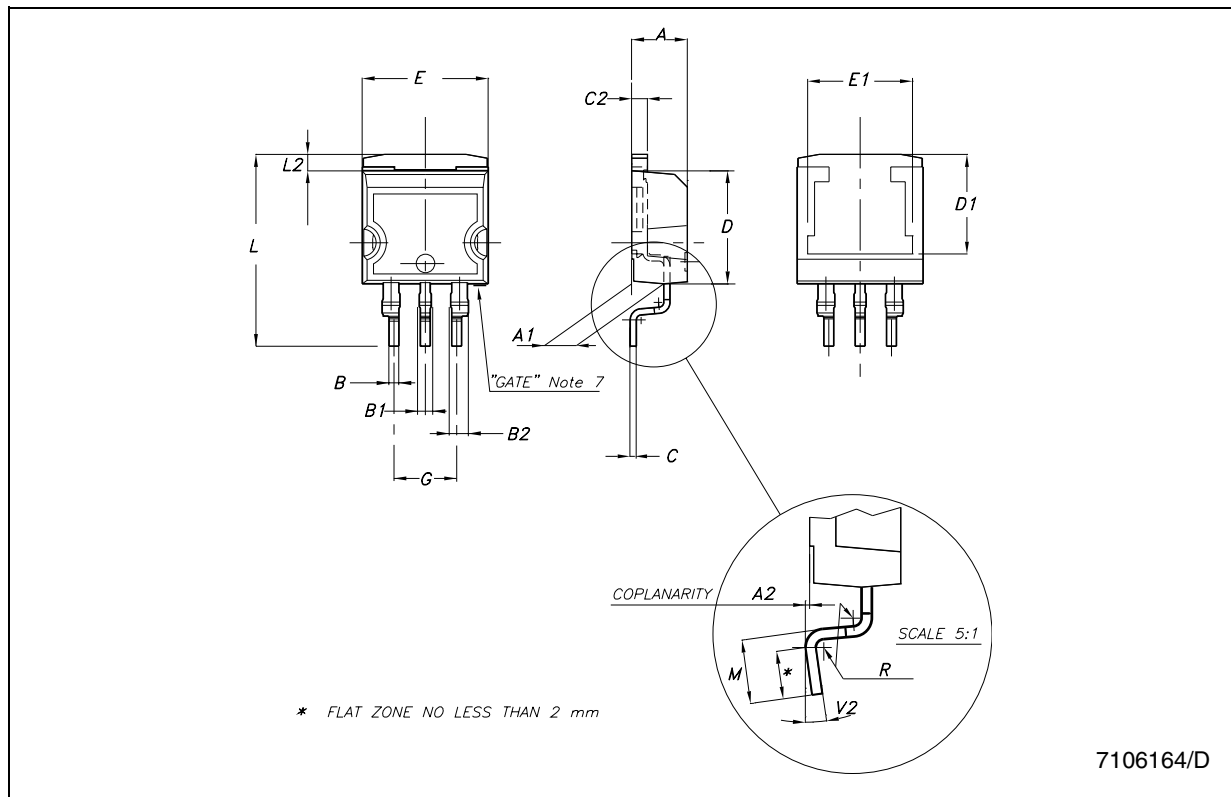

P²PAK MECHANICAL DATA


| DIM. | mm. | | | inch | | |
|------|-------|------|-------|-------|-------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | 4.30 | | 4.80 | 0.169 | | 0.188 |
| A1 | 2.40 | | 2.80 | 0.094 | | 0.110 |
| A2 | 0.03 | | 0.23 | 0.001 | | 0.009 |
| b | 0.80 | | 1.05 | 0.031 | | 0.041 |
| c | 0.45 | | 0.60 | 0.017 | | 0.023 |
| c2 | 1.17 | | 1.37 | 0.046 | | 0.053 |
| D | 8.95 | | 9.35 | 0.352 | | 0.368 |
| D2 | | 8 | | | 0.315 | |
| E | 10.00 | | 10.40 | 0.393 | | 0.409 |
| E1 | | 8.5 | | | 0.334 | 0.409 |
| e | 3.20 | | 3.60 | 0.126 | | 0.142 |
| e1 | 6.60 | | 7.00 | 0.260 | | 0.275 |
| L | 13.70 | | 14.50 | 0.539 | | 0.571 |
| L2 | 1.25 | | 1.40 | 0.049 | | 0.055 |
| L3 | 0.90 | | 1.70 | 0.035 | | 0.067 |
| L5 | 1.55 | | 2.40 | 0.061 | | 0.094 |
| R | | 0.40 | | | 0.016 | |
| V2 | 0° | | 8° | 0° | | 8° |

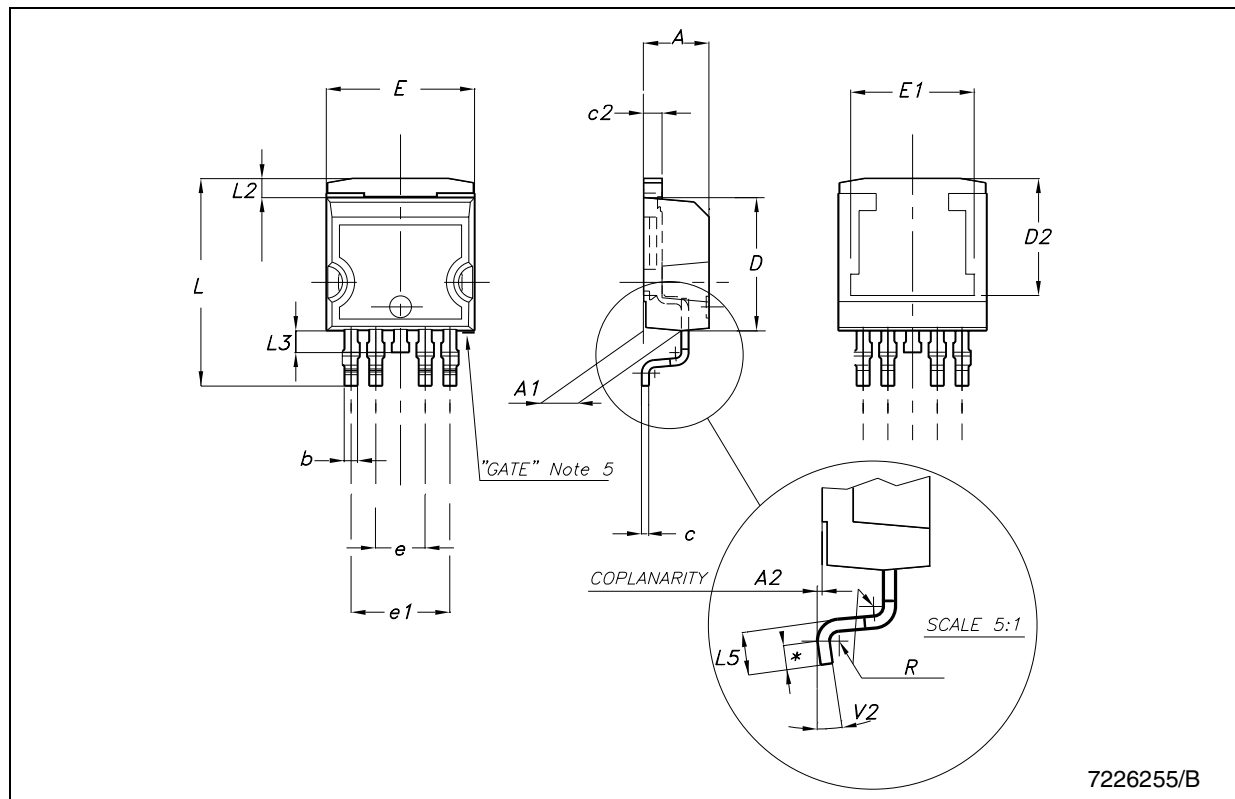

7226255/B

P²PAK/A MECHANICAL DATA


| DIM. | mm. | | | inch | | |
|------|-------|------|-------|-------|-------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | 4.30 | | 4.80 | 0.169 | | 0.188 |
| A2 | 0.03 | | 0.23 | 0.001 | | 0.009 |
| C | 1.17 | | 1.37 | 0.046 | | 0.053 |
| D | 2.40 | | 2.80 | 0.094 | | 0.110 |
| D1 | 8.95 | | 9.35 | 0.352 | | 0.368 |
| E | 0.45 | | 0.60 | 0.017 | | 0.023 |
| F | 0.80 | | 1.05 | 0.031 | | 0.041 |
| G | 3.20 | | 3.60 | 0.126 | | 0.142 |
| G1 | 6.60 | | 7.00 | 0.260 | | 0.275 |
| H1 | | 8.5 | | | 0.334 | 0.409 |
| H2 | 10.00 | | 10.40 | 0.393 | | 0.409 |
| L | 15 | | 15.85 | 0.590 | | 0.624 |
| L1 | | 8 | | | 0.315 | |
| L2 | 1.27 | | 1.40 | 0.050 | | 0.055 |
| M | 2.4 | | 3.2 | 0.094 | | 0.126 |
| R | | 0.40 | | | 0.016 | |
| V2 | 0° | | 8° | 0° | | 8° |

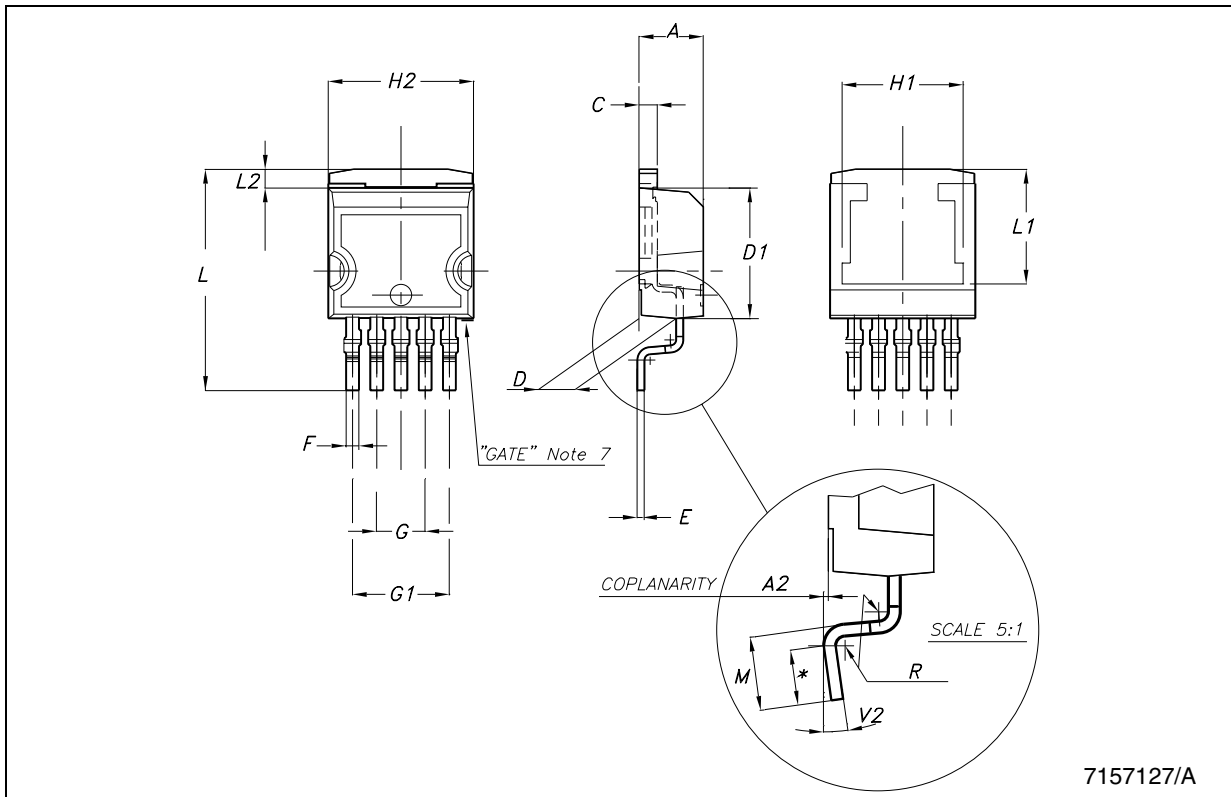

7157127/A

Tape & Reel D²PAK-P²PAK-D²PAK/A-P²PAK/A MECHANICAL DATA

| DIM. | mm. | | | inch | | |
|------|-------|-------|-------|-------|-------|-------|
| | MIN. | TYP | MAX. | MIN. | TYP. | MAX. |
| A | | | 180 | | | 7.086 |
| C | 12.8 | 13.0 | 13.2 | 0.504 | 0.512 | 0.519 |
| D | 20.2 | | | 0.795 | | |
| N | 60 | | | 2.362 | | |
| T | | | 14.4 | | | 0.567 |
| Ao | 10.50 | 10.6 | 10.70 | 0.413 | 0.417 | 0.421 |
| Bo | 15.70 | 15.80 | 15.90 | 0.618 | 0.622 | 0.626 |
| Ko | 4.80 | 4.90 | 5.00 | 0.189 | 0.193 | 0.197 |
| Po | 3.9 | 4.0 | 4.1 | 0.153 | 0.157 | 0.161 |
| P | 11.9 | 12.0 | 12.1 | 0.468 | 0.472 | 0.476 |

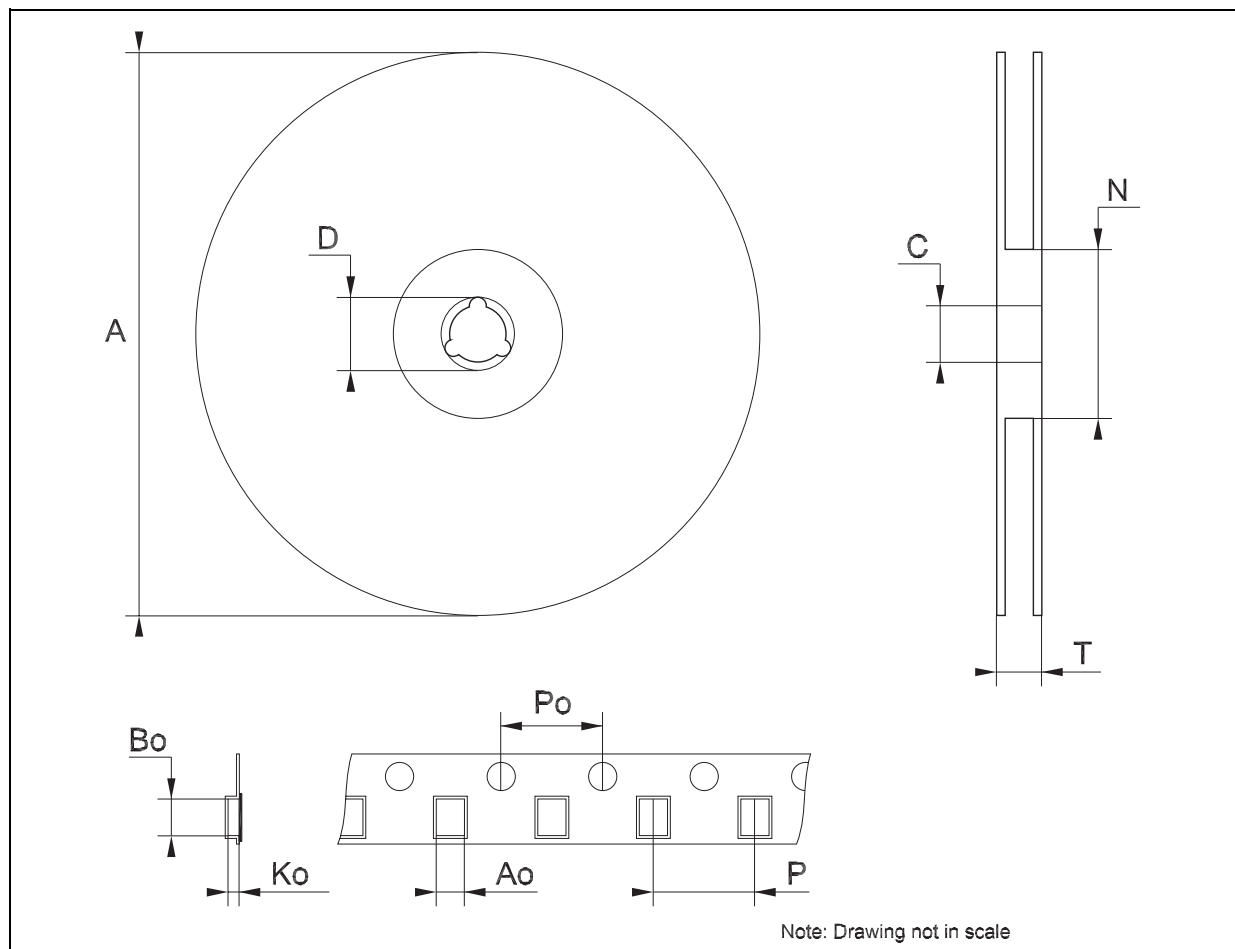

8 Revision history

Table 11. Revision history

| Date | Revision | Changes |
|-------------|----------|---|
| 21-Oct-2005 | 7 | Order Codes Has Been Updated. |
| 10-Apr-2007 | 8 | Order codes has been updated and the document has been reformatted. |
| 11-May-2007 | 9 | Order codes has been updated. |
| 08-Jun-2007 | 10 | Order codes has been updated. |

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

UNLESS EXPRESSLY APPROVED IN WRITING BY AN AUTHORIZED ST REPRESENTATIVE, ST PRODUCTS ARE NOT RECOMMENDED, AUTHORIZED OR WARRANTED FOR USE IN MILITARY, AIR CRAFT, SPACE, LIFE SAVING, OR LIFE SUSTAINING APPLICATIONS, NOR IN PRODUCTS OR SYSTEMS WHERE FAILURE OR MALFUNCTION MAY RESULT IN PERSONAL INJURY, DEATH, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE. ST PRODUCTS WHICH ARE NOT SPECIFIED AS "AUTOMOTIVE GRADE" MAY ONLY BE USED IN AUTOMOTIVE APPLICATIONS AT USER'S OWN RISK.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2007 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com