

LQFP

Low Profile Quad Flat Pack

- 7 x 7mm to 28 x 28mm body sizes
- 32 to 208 lead counts
- Lead pitch range from 0.80mm to 0.40mm



FEATURES

- Body Sizes: 7 x 7mm to 28 x 28mm
- Package Height: 1.4mm
- Lead Counts: 32L to 208L
- Lead Pitch: 0.80mm to 0.40mm
- Wide range of open tool leadframe and die pad sizes available
- Moisture Sensitivity: JEDEC Level 3
- JEDEC standard compliant
- Lead-free and Green materials sets available
- Copper and alloy leadframes available

APPLICATIONS

- 3D Graphics
- Multimedia
- PC Chipsets
- Video / Audio
- Telecom
- Disc Drives
- Communication Boards (Ethernet, ISDN)

DESCRIPTION

STATS ChipPAC's LQFP is a low profile (1.4mm) version of the QFP. The LQFP is a leadframe based, plastic encapsulated package with gull wing shaped leads on four sides. The LQFP offers pin counts up to 208, and is suitable for designs with high I/Os while meeting low profile requirements and for mainstream cost sensitive applications.

Low Profile Quad Flat Pack

SPECIFICATIONS

Die Thickness	280-430µm (11-17mils) range preferred
Gold Wire	25/30µm (1.0/1.2mils) diameter, 99.999%Au
Lead Finish	85/15 Sn/Pb or Matte Tin
Marking	Laser / ink
Packing Options	JEDEC tray / tape and reel

RELIABILITY

Moisture Sensitivity Level	JEDEC Level 3
Temperature Cycling	-65°C/150°C, 1000 cycles
High Temperature Storage	150°C, 500 hrs
Pressure Cooker Test	121°C 100% RH, 2 atm, 168 hrs
Liquid Thermal Shock (opt)	-55°C/125°C, 1000 cycles

THERMAL PERFORMANCE, θ_{ja} (°C/W)

Package	Body Size (mm)	Pad Size (mm)	Die Size (mm)	Thermal Performance, θ_{ja} (°C/W)
48L	7 x 7 x 1.4	5.3 x 5.3	3.8 x 3.8	50.0
100L	14 x 14 x 1.4	9.0 x 9.0	7.8 x 7.8	37.2
208L	28 x 28 x 1.4	9.0 x 9.0	7.8 x 7.8	32.1


Note: Simulation data for package mounted on 4 layer PCB (per JEDEC JESD51-7) under natural convection as defined in JESD51-2.

ELECTRICAL PERFORMANCE

Electrical parasitic data is highly dependent on the package layout. 3D electrical simulation can be used on the specific package design to provide the best prediction of electrical behavior. Data below is for a frequency of 100MHz and assumes 1.0 mil gold bonding wire.

Conductor Component	Length (mm)	Resistance (mOhms)	Inductance (nH)	Inductance Mutual (nH)	Capacitance (pF)	Capacitance Mutual (pF)
Wire	2	120	1.65	0.45 - 0.85	0.10	0.01 - 0.02
Lead (7 x 7mm, 32L)	1.4 - 2.2	11.0 - 18.0	0.64 - 0.99	0.31 - 0.49	0.21 - 0.33	0.07 - 0.12
Total (7 x 7mm, 32L)		131 - 138	2.29 - 2.64	0.76 - 1.34	0.31 - 0.43	0.08 - 0.14
Wire	2	120	1.65	0.45 - 0.85	0.10	0.01 - 0.02
Lead (14 x 14mm, 128L)	3.0 - 4.5	24.0 - 36.0	1.96 - 2.92	1.08 - 1.61	0.45 - 0.67	0.20 - 0.30
Total (14 x 14mm, 128L)		144.0 - 156.0	3.61 - 4.57	1.53 - 2.46	0.55 - 0.77	0.21 - 0.32

CROSS-SECTION

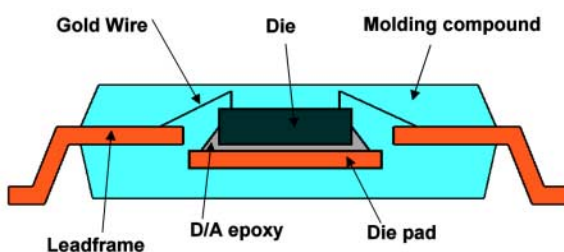

PACKAGE CONFIGURATIONS

Package Size (mm)	Lead Count
7 x 7	32, 40, 48
10 x 10	44, 64
12 x 12	80, 100
14 x 14	44, 64, 80, 100, 128
14 x 20	128
20 x 20	144, 184
24 x 24	176
28 x 28	208

Corporate Office 10 Ang Mo Kio St. 65, #05-17/20 Techpoint, Singapore 569059 Tel: 65-6824-7777 Fax: 65-6720-7823
Global Offices USA 510-979-8000 JAPAN 81-43-351-3320 CHINA 86-21-5976-5858 MALAYSIA 603-4257-6222
 KOREA 82-31-639-8911 TAIWAN 886-3-593-6565 UK 44-1483-413-700 NETHERLANDS 31-38-333-2023

The STATS ChipPAC logo is a registered trademark of STATS ChipPAC Ltd. All other product names and other company names herein are for identification purposes only and may be the trademarks or registered trademarks of their respective owners. STATS ChipPAC disclaims any and all rights in those marks. STATS ChipPAC makes no guarantee or warranty of its accuracy in the information given, or that the use of such information will not infringe on intellectual rights of third parties. Under no circumstances shall STATS ChipPAC be liable for any damages whatsoever arising out of the use of, or inability to use the materials in this document. STATS ChipPAC reserves the right to change the information at any time and without notice.

©Copyright 2005. STATS ChipPAC Ltd. All rights reserved.
 January 2005