


LINEAR SYSTEMS

Linear Integrated Systems

LS350 LS351 LS352

MONOLITHIC DUAL PNP TRANSISTORS

FEATURES		
HIGH GAIN		$h_{FE} \geq 200 @ 10\mu A - 1mA$
TIGHT V_{BE} MATCHING		$ V_{BE1} - V_{BE2} = 0.2mV TYP.$
HIGH f_T		275MHz TYP. @ 1mA
ABSOLUTE MAXIMUM RATINGS NOTE 1		
@ 25°C (unless otherwise noted)		
I_C	Collector Current	10mA
Maximum Temperatures		
Storage Temperature		-65° to +200°C
Operating Junction Temperature		+150°C
Maximum Power Dissipation		
	ONE SIDE	BOTH SIDES
Device Dissipation @ Free Air	250mW	500mW
Linear Derating Factor	2.3mW/°C	4.3mW/°C

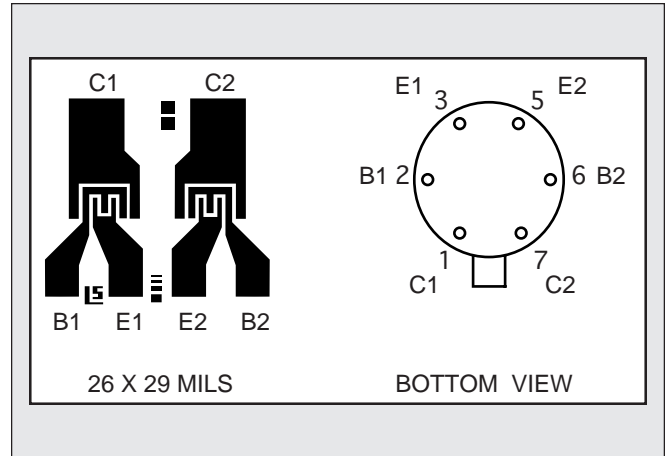

ELECTRICAL CHARACTERISTICS @ 25°C (unless otherwise noted)


SYMBOL	CHARACTERISTICS	LS350	LS351	LS352		UNITS	CONDITIONS
V_{CBO}	Collector to Base Voltage	25	45	60	MIN.	V	$I_C = 10\mu A$ $I_E = 0$
V_{CEO}	Collector to Emitter Voltage	25	45	60	MIN.	V	$I_C = 10\mu A$ $I_B = 0$
V_{EBO}	Emitter to Base Voltage	6.2	6.2	6.2	MIN.	V	$I_E = 10\mu A$ $I_C = 0$ NOTE 2
V_{CCO}	Collector to Collector Voltage	30	60	100	MIN.	V	$I_C = 10\mu A$ $I_E = 0$
h_{FE}	DC Current Gain	100	150 600	200 600	MIN. MAX.		$I_C = 10\mu A$ $V_{CE} = 5V$
h_{FE}	DC Current Gain	100	150 600	200 600	MIN. MAX.		$I_C = 100\mu A$ $V_{CE} = 5V$
h_{FE}	DC Current Gain	100	150	200	MIN.		$I_C = 1mA$, $V_{CE} = 5V$
$V_{CE(SAT)}$	Collector Saturation Voltage	0.5	0.5	0.5	MAX.	V	$I_C = 1mA$ $I_B = 0.1mA$
I_{CBO}	Collector Cutoff Current	0.2	0.2	0.2	MAX.	nA	$I_E = 0$ $V_{CB} = \text{NOTE 3}$
I_{EBO}	Emitter Cutoff Current	0.2	0.2	0.2	MAX.	nA	$I_C = 0$ $V_{EB} = 3V$
C_{OBO}	Output Capacitance	2	2	2	MAX.	pF	$I_E = 0$ $V_{CB} = 5V$
C_{C1C2}	Collector to Collector Capacitance	2	2	2	MAX.	pF	$V_{CC} = 0$
I_{C1C2}	Collector to Collector Leakage Current	0.5	0.5	0.5	MAX.	nA	$V_{CC} = \text{NOTE 4}$
f_T	Current Gain Bandwidth Product	200	200	200	MIN.	MHz	$I_C = 1mA$ $V_{CE} = 5V$
NF	Narrow Band Noise Figure	3	3	3	MAX.	dB	$I_C = 100\mu A$ $V_{CE} = 5V$ BW = 200Hz $R_G = 10 K\Omega$ f = 1KHz

Linear Integrated Systems

4042 Clipper Court, Fremont, CA 94538 • TEL: (510) 490-9160 • FAX: (510) 353-0261

MATCHING CHARACTERISTICS

SYMBOL	CHARACTERISTICS	LS350	LS351	LS352		UNITS	CONDITIONS
$ V_{BE1} - V_{BE2} $	Base Emitter Voltage Differential	1	0.4	0.2	TYP.	mV	$I_C = 10 \mu A$ $V_{CE} = 5V$
		5	1.0	0.5	MAX.	mV	
$\Delta (V_{BE1} - V_{BE2}) /^\circ C$	Base Emitter Voltage Differential Change with Temperature	2	1	0.5	TYP.	$\mu V/^\circ C$	$I_C = 10 \mu A$ $V_{CE} = 5V$
		20	10	2	MAX.	$\mu V/^\circ C$	$T_A = -55^\circ C$ to $+125^\circ C$
$ I_{B1} - I_{B2} $	Base Current Differential		5	5	MAX.	nA	$I_C = 10 \mu A$ $V_{CE} = 5V$
$ \Delta(I_{B1} - I_{B2}) /^\circ C$	Base Current Differential Change with Temperature		0.5	0.3	MAX.	nA/°C	$I_C = 10 \mu A$, $V_{CE} = 5V$ $T_A = -55^\circ C$ to $+125^\circ C$
h_{FE1}/h_{FE2}	DC Current Gain Differential	10	5	5	TYP.	%	$I_C = 10 \mu A$ $V_{CE} = 5V$

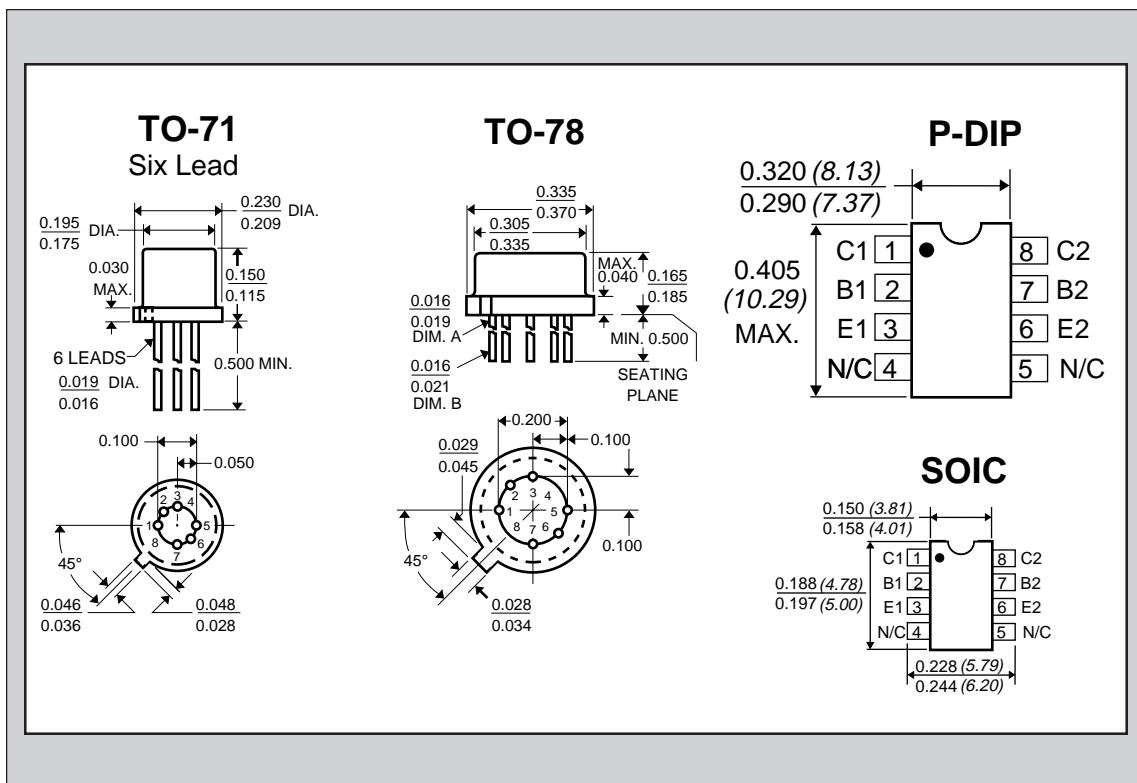

NOTES:

1. These ratings are limiting values above which the serviceability of any semiconductor may be impaired.
2. The reverse base-to-emitter voltage must never exceed 6.2 volts; the reverse base-to-emitter current must never exceed 10 μA .
3. For LS350: $V_{CB} = 20V$; for LS351 & LS352: $V_{CB} = 30V$.
4. For LS351: $V_{CC} = \pm 45V$; for LS352: $V_{CC} = \pm 80V$; for LS350: $V_{CC} = \pm 25V$.