


8W 940nm Uncooled Multimode Laser Diode Module

MU8-940-01/04


The Bookham new MU8-940-01/04 multimode laser diode module series has been designed to provide the increased power and reliability required for pumping next generation solid-state and fiber lasers, and for direct applications. The module includes a multimode laser diode chip with E2 front mirror passivation that prevents Catastrophic Optical Damage (COD) to the laser diode facet even at very high power levels. The coupling process allows for high output powers that are very stable with both time and temperature.

Features:

- High output power of 8W
- 0.22NA 105µm core multimode fiber pigtail (0.15NA upon request)
- Hermetically sealed 3-pin and 2-pin packages
- Floating anode/cathode
- High reliability
- Excellent solderability
- Standard wavelengths at 940nm
- RoHS compliant 

Applications:

- Fiber laser pumping
- Direct applications
- Material processing
- Printing
- Medical

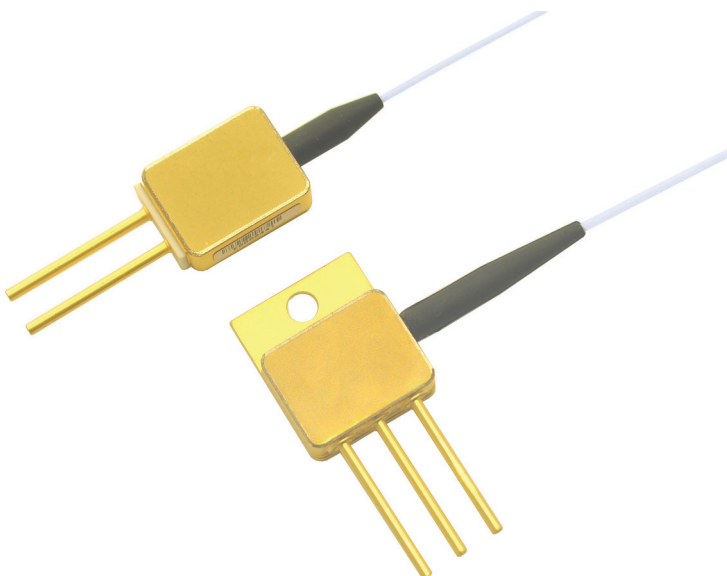

Characteristics

Conditions unless otherwise stated:

Parameters at 25°C heat sink temperature and use of a thermal interface material rated for a thermal contact resistance of less than 1.3cm² K/W (0.2in² K/W). Pigtail fiber with 105µm core diameter and 0.22NA.

Parameter	Symbol	Typical	Unit
CW Output Power	P_{op}	8	W
Center Wavelength	λ_c	940 ± 10	nm
Spectral Width (95% of Power)	$\Delta\lambda$	6	nm
Threshold Current	I_{th}	500	mA
Slope Efficiency	$\eta_D = P_{op} / (I_{op} - I_{th})$	0.95	W/A
Operating Current	I_{op}	9.5	A
Operating Voltage	V_{op}	1.9	V
Operating Temperature	T_{op}	25 ± 5	°C


Absolute Ratings

Parameter	Min	Max	Unit
ESD	-	500	V
Storage Temperature	-40	85	°C
Lead Soldering Temperature	-	250	°C
Lead Soldering Time	-	10	Sec
Operating Case Temperature	0	45	°C
Relative Humidity	5	85	%

Fiber Specification

Parameter	Min	Typ	Max	Unit
Buffer Diameter	230	250	270	µm
Cladding Diameter	123	125	128	µm
Core Diameter	102	104	106	µm
Numeric Aperture	-	0.22 (0.15)	-	-
Fiber Length	-	1.5	-	m

Package Dimensions (mm)

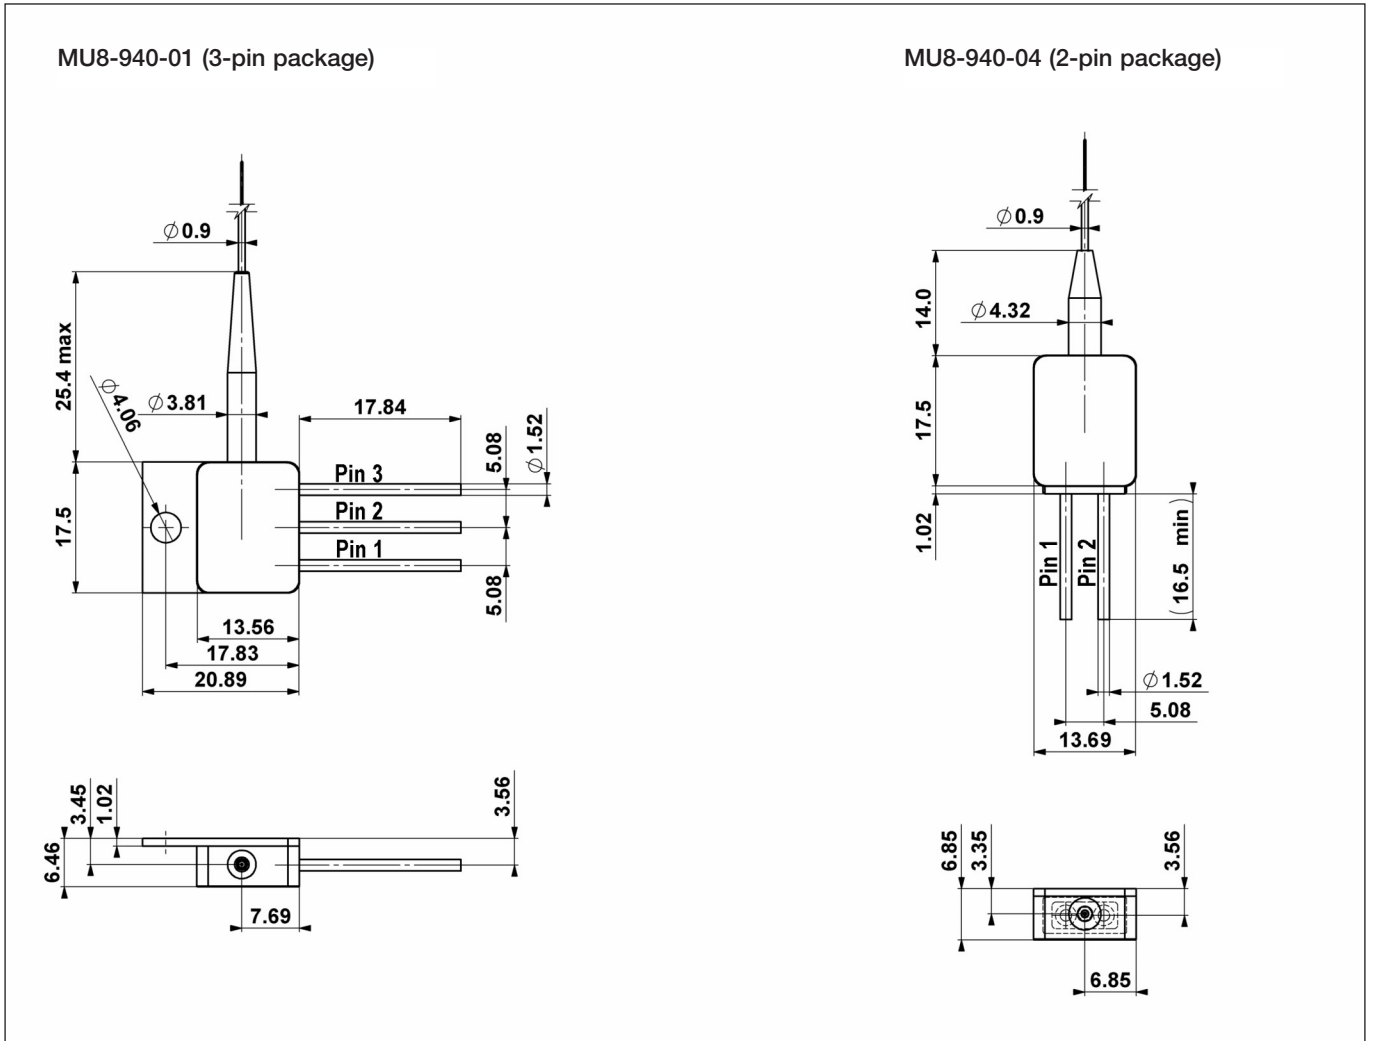

Connection

Pin #	MU8-940-01	MU8-940-04
1	Laser Diode Anode (+)	Laser Diode Anode (+)
2	Laser Diode Cathode (-)	Laser Diode Cathode (-)
3	Not Used (can be removed)	-

RoHS Compliance

Bookham is fully committed to environment protection and sustainable development and has set in place a comprehensive program for removing polluting and hazardous substances from all of its products. The relevant evidence of RoHS compliance is held as part of our controlled documentation for each of our compliant products. RoHS compliance parts are available to order, please refer to the ordering information section for further details.

Ordering Information:

(3-pin housing)

MU8-940-01	8W 940nm Multimode Laser Diode Module with 0.22NA fiber
MU8-940-01 with 0.15NA	8W 940nm Multimode Laser Diode Module with 0.15NA fiber

(2-pin housing)

MU8-940-04	8W 940nm Multimode Laser Diode Module with 0.22NA fiber
MU8-940-04 with 0.15NA	8W 940nm Multimode Laser Diode Module with 0.15NA fiber

Contact Information

Bookham (Switzerland) AG

Binzstrasse 17
8045 Zurich
Switzerland

• Tel: +41 44 455 8787
• Fax: +41 44 455 8586

www.bookham.com
highpower@bookham.com

EMEA Sales Contact

Gunnar Stolze
• Tel: +41 79 635 3777

North America Sales Contact

Michael Cutler
• Tel: +1 678 763 0777

ASIA Sales Contact

Patrick Lee
• Tel: +852 9197 7014

Japan Sales Contact

Japan Laser Corporation
• Tel: +813 5285 0861

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by Bookham before they become applicable to any particular order or contract. In accordance with the Bookham policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of Bookham or others. Further details are available from any Bookham sales representative.

