



S E M I C O N D U C T O R

MUR15120

GLASS PASSIVATED SUPER FAST RECTIFIER

Reverse Voltage - 1200 Volts


Forward Current - 15.0Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Fast switching for high efficiency
- Low forward voltage drop
- Ultrafast Recovery Time
- High surge current capability
- For use in free wheeling, snubber, clamp, inversion welder, PFC, Plating Power Supply
- High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case
- Component in accordance to RoHS 2011/65/EU



TO-220AC

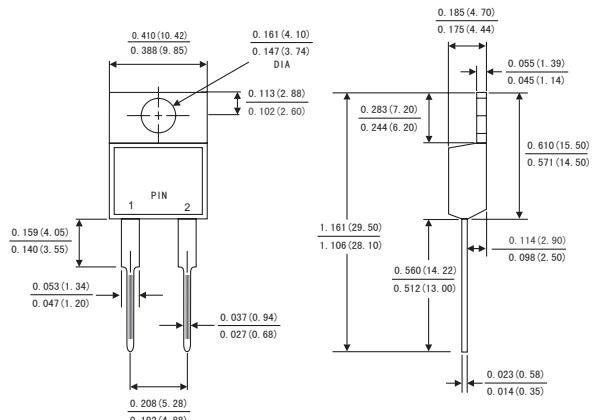

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: JEDEC TO-220AC molded plastic body
- Terminals: Lead solderable per MIL-STD-750, method 2026
- Polarity: As marked
- Mounting Position: Any

ABSOLUT MAXIMUM RATINGS ($T_C=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions		Values	Unit
V_R	Maximum DC blocking voltage		1200	V
V_{RRM}	Maximum repetitive peak reverse voltage		1200	V
$I_{F(AV)}$	Average forward current	$T_C=100^\circ\text{C}$	15	A
$I_{F(RMS)}$	RMS forward current	$T_C=100^\circ\text{C}$	21	A
I_{FSM}	NON Repetitive Surge Forward Current	$T_j=45^\circ\text{C}$, $t=10\text{ms}$, 50Hz, Sine	150	A
P_D	Power Dissipation		125	W
T_J	Junction temperature		-55 to +150	$^\circ\text{C}$
T_{STG}	Storage temperature range		-55 to +150	$^\circ\text{C}$
Torque	Module to Sink	Recommended(M3)	1.1	Nm
R_{JC}	Junction to Case Thermal Resistance		2.0	$^\circ\text{C}/\text{W}$

MUR15120

ELECTRICAL CHARACTERISTICS ($T_c=25^\circ\text{C}$ unless otherwise specified)

Symbol	Parameter/Test Conditions	Min.	Typ.	Max.	Unit
I_{RM}	Maximum Reverse Leakage Current $V_R=1200\text{V}$			10	μA
I_{RM}	Maximum Reverse Leakage Current $V_R=1200\text{V}, T_J=125^\circ\text{C}$			1	mA
V_F	Forward Voltage $I_F=8\text{A}$		2.8	3.2	V
V_F	Forward Voltage $I_F=8\text{A}, T_J=125^\circ\text{C}$		2.3		V
t_{rr}	Reverse Recovery Time ($I_F=1\text{A}, dI_F/dt=-200\text{A}/\mu\text{s}, V_R=30\text{V}$)		25	30	ns
t_{rr}	Reverse Recovery Time ($I_F=0.5\text{A}, I_R=1\text{A}, I_{RR}=0.25\text{A}$)		35	40	ns
t_{rr}	Reverse Recovery Time $I_F=8\text{A}, V_R=600\text{V}$	72			ns
I_{RRM}	Maximum Reverse Recovery Current $dI_F/dt=-200\text{A}/\mu\text{s}$	5			A
t_{rr}	Reverse Recovery Time $I_F=8\text{A}, V_R=600\text{V}$	240			ns
I_{RRM}	Maximum Reverse Recovery Current $dI_F/dt=-200\text{A}/\mu\text{s}, T_J=125^\circ\text{C}$	7.5			A

RATINGS AND CHARACTERISTIC CURVES

FIG.1-Forward Voltage Drop vs Forward Current


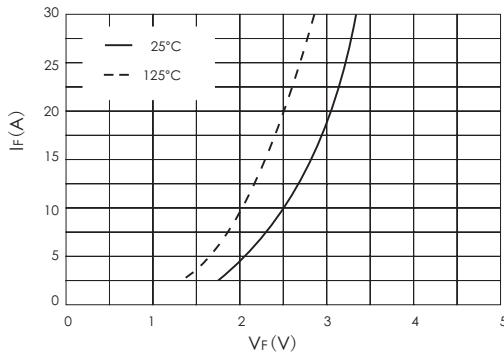


FIG.2-Reverse Recovery Time vs dI_F/dt

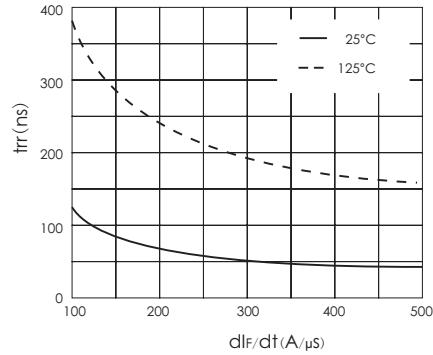

MUR15120

FIG.3-Reverse Recovery Current vs dI_F/dt

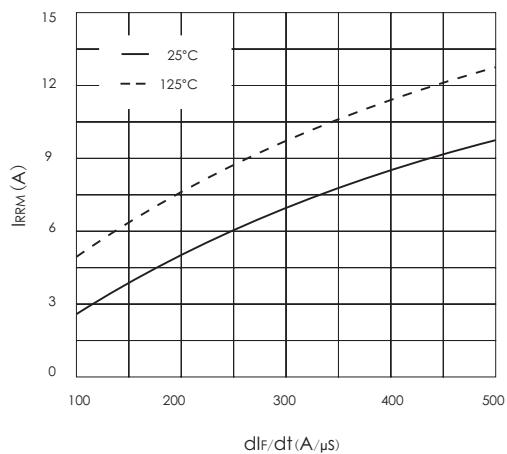


FIG.4-Reverse Recovery Charge vs dI_F/dt

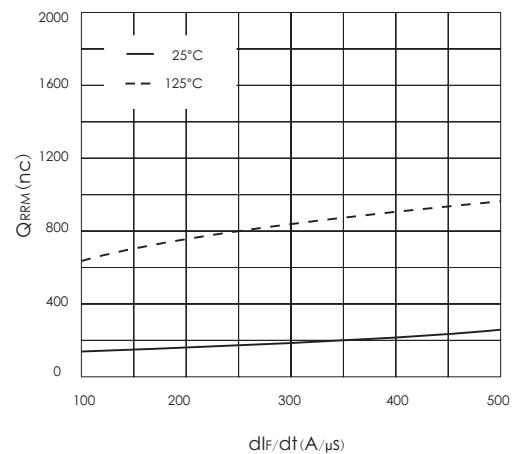


FIG.5-Forward Current vs Case temperature

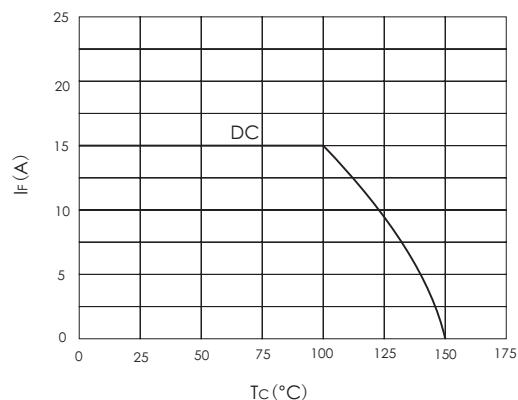


FIG.5-Forward Current vs Case temperature

