

## RL101F THRU RL107F


CURRENT 1.0 Amper  
VOLTAGE 50 to 1000 Volts

### Features

- Plastic package has Underwriters Laboratory Flammability Classification 94-0
- Fast switching speed
- Low forward voltage drop, high efficiency
- High current capability
- High reliability

### Mechanical Data

- Case : A-405 molded plastic body
- Terminals : Plated axial lead solderable per MIL-STD-750, method 2026
- Polarity : Color band denotes cathode end
- Mounting Position : Any
- Weight : 0.08 ounce, 0.22 gram

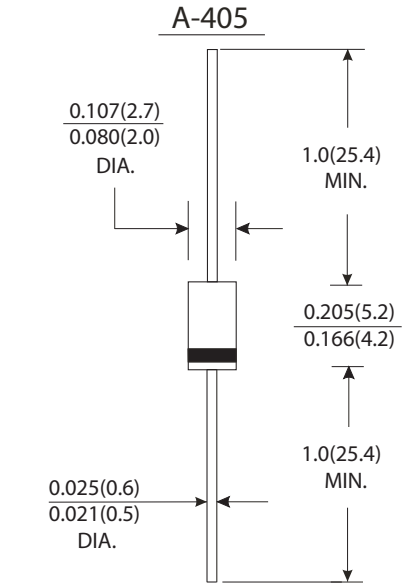

Dimensions in inches and (millimeters)

### Maximum Ratings And Electrical Characteristics

(Ratings at 25 °C ambient temperature unless otherwise specified, Single phase, half wave 60Hz, resistive or inductive load. For capacitive load, derate by 20%)

	Symbols	RL 101F	RL 102F	RL 103F	RL 104F	RL 105F	RL 106F	RL 107F	Units
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current 0.375"(9.5mm) lead length T <sub>A</sub> =55 °C	I <sub>(AV)</sub>	1.0							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I <sub>FSM</sub>	25.0							Amps
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	1.3							Volts
Maximum DC reverse current at rated DC blocking voltage	I <sub>R</sub>	5.0							μA
Maximum full load reverse current full cycle average. 0.375"(9.5mm) lead length at T <sub>A</sub> =55 °C		100.0							
Maximum reverse recovery time (Note 1)	T <sub>rr</sub>	150			250	500		ns	
Typical junction capacitance (Note 2)	C <sub>J</sub>	15.0							pF
Operating junction and storage temperature range	T <sub>J</sub> T <sub>STG</sub>	-65 to +150							°C

#### Notes:

- (1) Test conditions: I<sub>F</sub>=0.5A, I<sub>R</sub>=1.0A, I<sub>rr</sub>=0.25A.
- (2) Measured at 1MHz and applied reverse voltage of 4.0 Volts.

## RATINGS AND CHARACTERISTIC CURVES RL101F THRU RL107F

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

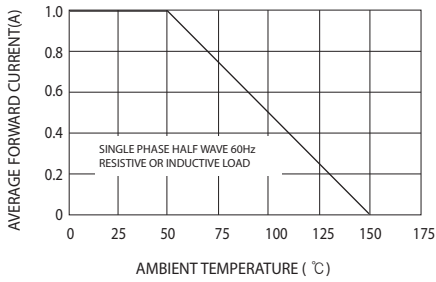


FIG.2-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

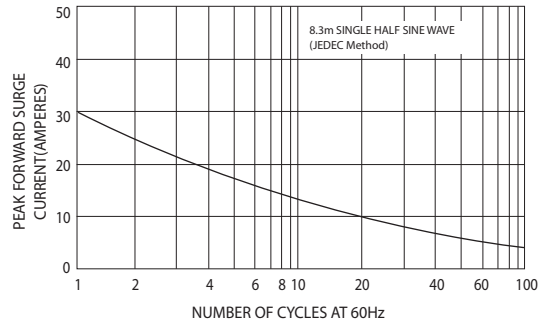


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

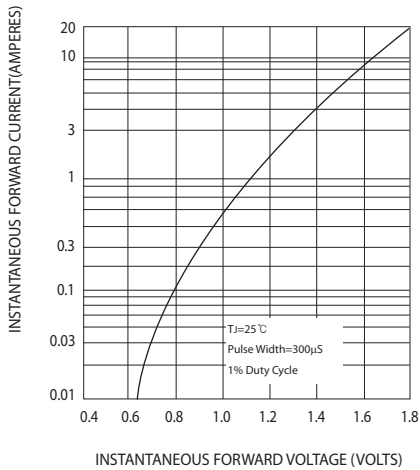


FIG.4-TYPICAL REVERSE CHARACTERISTICS

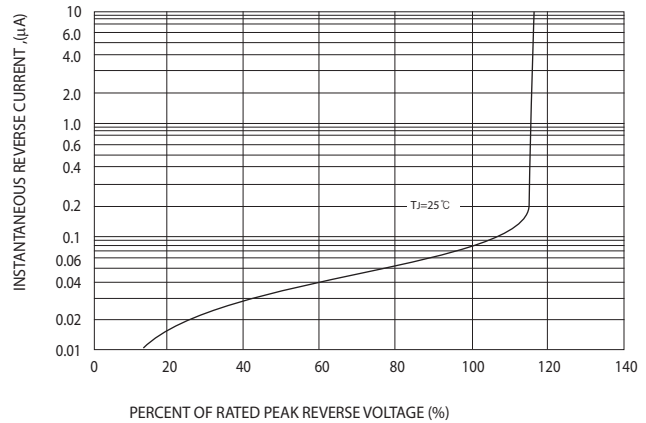


FIG.5-TYPICAL JUNCTION CAPACITANCE

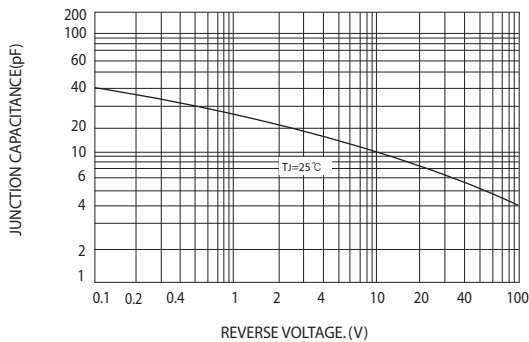


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

