


5A LDO VOLTAGE REGULATOR

DESCRIPTION

The SA1084 is a positive low voltage dropout regulator, and the voltage dropout is 1.5V at 5A.

SA1084 provides two versions: fixed and adjustable versions. V_{OUT} of fixed version has a tolerance of less than 1% for five kinds of output voltages 1.5V, 1.8V, 2.5V, 3.3V, and 5.0V.

The SA1084 offers some key features include thermal shutdown and current limiting. The SA1084 is an excellent choice for use in various electronic equipments.

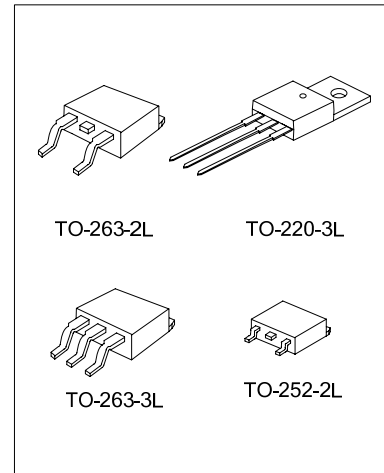


FEATURES

- * 1% accuracy in fixed version 1.5V, 1.8V, 2.5V, 3.3V, 5.0V and adjustable version
- * Low Dropout Voltage: 1.5V at 5A output current
- * Current Limiting: 6.5A
- * Thermal Shutdown
- * Line Regulation(Adj Version: Typical): 0.015%
- * Load Regulation (Adj Version: Typical): 0.1%
- * Temperature Range: 0 to 125°C

APPLICATIONS

- * High Efficiency Linear Regulators
- * Post Regulators for Switching Supplies
- * Battery Charger
- * Microprocessor Supply
- * Desktop PCs, RISC and Embedded Processors Supply


ORDERING INFORMATION (Temperature range: 0~125°C)

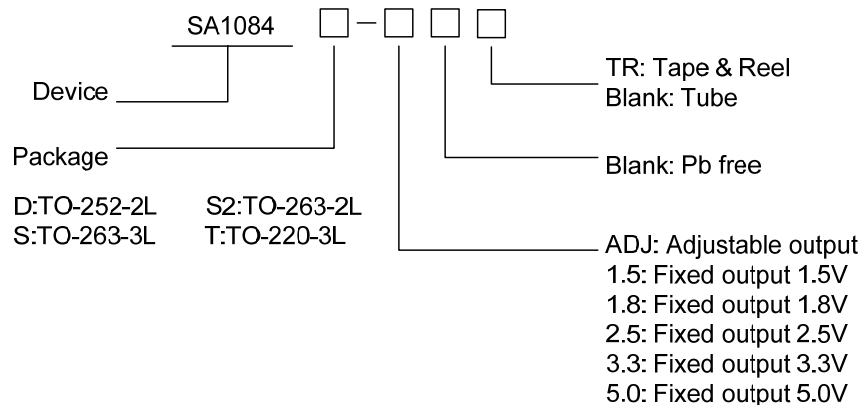

| Part No. | Package | Marking | Material | Package Type |
|---------------|-----------|-------------|----------|--------------|
| SA1084D-ADJ | TO-252-2L | SA1084D-ADJ | Pb free | Tube |
| SA1084D-ADJTR | | SA1084D-ADJ | Pb free | Tape & Reel |
| SA1084D-1.5 | | SA1084D-1.5 | Pb free | Tube |
| SA1084D-1.5TR | | SA1084D-1.5 | Pb free | Tape & Reel |
| SA1084D-1.8 | | SA1084D-1.8 | Pb free | Tube |
| SA1084D-1.8TR | | SA1084D-1.8 | Pb free | Tape & Reel |

| Part No. | Package | Marking | Material | Package Type | |
|----------------|-------------|--------------|-------------|--------------|------|
| SA1084D-2.5 | TO-252-2L | SA1084D-2.5 | Pb free | Tube | |
| SA1084D-2.5TR | | SA1084D-2.5 | Pb free | Tape & Reel | |
| SA1084D-3.3 | | SA1084D-3.3 | Pb free | Tube | |
| SA1084D-3.3TR | | SA1084D-3.3 | Pb free | Tape & Reel | |
| SA1084D-5.0 | | SA1084D-5.0 | Pb free | Tube | |
| SA1084D-5.0TR | | SA1084D-5.0 | Pb free | Tape & Reel | |
| SA1084S-ADJ | TO-263-3L | SA1084S-ADJ | Pb free | Tube | |
| SA1084S-ADJTR | | SA1084S-ADJ | Pb free | Tape & Reel | |
| SA1084S-1.5 | | SA1084S-1.5 | Pb free | Tube | |
| SA1084S-1.5TR | | SA1084S-1.5 | Pb free | Tape & Reel | |
| SA1084S-1.8 | | SA1084S-1.8 | Pb free | Tube | |
| SA1084S-1.8TR | | SA1084S-1.8 | Pb free | Tape & Reel | |
| SA1084S-2.5 | | SA1084S-2.5 | Pb free | Tube | |
| SA1084S-2.5TR | | SA1084S-2.5 | Pb free | Tape & Reel | |
| SA1084S-3.3 | | SA1084S-3.3 | Pb free | Tube | |
| SA1084S-3.3TR | | SA1084S-3.3 | Pb free | Tape & Reel | |
| SA1084S-5.0 | | SA1084S-5.0 | Pb free | Tube | |
| SA1084S-5.0TR | | SA1084S-5.0 | Pb free | Tape & Reel | |
| SA1084T-ADJ | | TO-220-3L | SA1084T-ADJ | Pb free | Tube |
| SA1084T-1.5 | | | SA1084T-1.5 | Pb free | Tube |
| SA1084T-1.8 | SA1084T-1.8 | | Pb free | Tube | |
| SA1084T-2.5 | SA1084T-2.5 | | Pb free | Tube | |
| SA1084T-3.3 | SA1084T-3.3 | | Pb free | Tube | |
| SA1084T-5.0 | SA1084T-5.0 | | Pb free | Tube | |
| SA1084S2-ADJ | TO-263-2L | SA1084S2-ADJ | Pb free | Tube | |
| SA1084S2-ADJTR | | SA1084S2-ADJ | Pb free | Tape & Reel | |
| SA1084S2-1.5 | | SA1084S2-1.5 | Pb free | Tube | |
| SA1084S2-1.5TR | | SA1084S2-1.5 | Pb free | Tape & Reel | |
| SA1084S2-1.8 | | SA1084S2-1.8 | Pb free | Tube | |
| SA1084S2-1.8TR | | SA1084S2-1.8 | Pb free | Tape & Reel | |
| SA1084S2-2.5 | | SA1084S2-2.5 | Pb free | Tube | |
| SA1084S2-2.5TR | | SA1084S2-2.5 | Pb free | Tape & Reel | |
| SA1084S2-3.3 | | SA1084S2-3.3 | Pb free | Tube | |
| SA1084S2-3.3TR | | SA1084S2-3.3 | Pb free | Tape & Reel | |
| SA1084S2-5.0 | | SA1084S2-5.0 | Pb free | Tube | |
| SA1084S2-5.0TR | | SA1084S2-5.0 | Pb free | Tape & Reel | |

BLOCK DIAGRAM

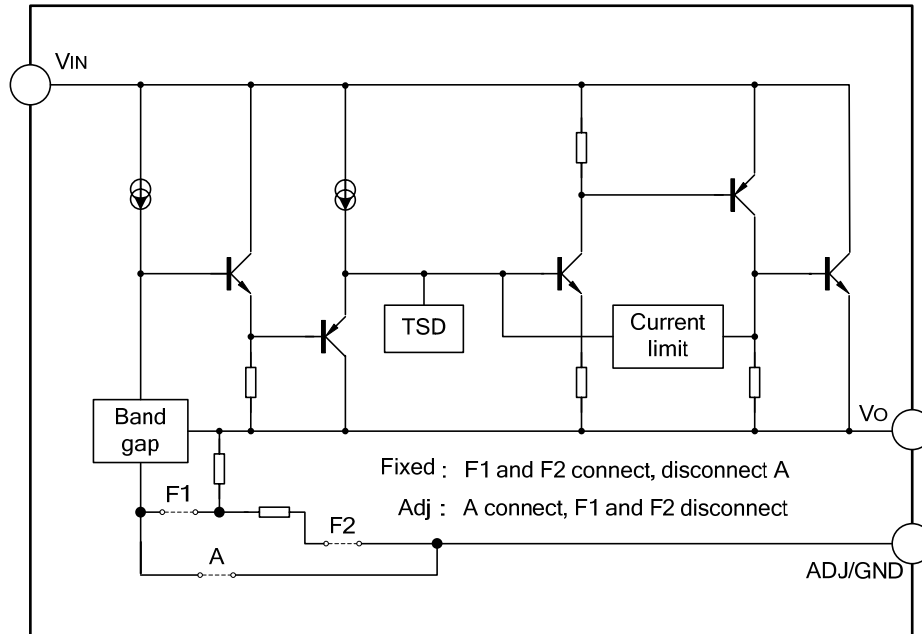

ABOSOLUTE MAXIMUM RATINGS

| Characteristics | Symbol | Ratings | Unit |
|---|------------|----------------------------|------|
| Input Supply Voltage | V_{IN} | 20 | V |
| Lead Temperature (Soldering, 5 seconds) | T_{LEAD} | 260 | °C |
| Operating Junction Temperature Range | T_J | 150 | °C |
| Storage Temperature Range | T_S | -65 ~ +150 | V |
| Power Disspation | PD | Internally Limited (note1) | mW |
| ESD Tolerance (Minimum) | ESD | 2000 | V |

Note1: The maximum allowable power dissipation is a function of maximum operating junction temperature, T_J (max), the junction to ambient thermal resistance, θ_{JA} , and the ambient temperature T_{amb} . The maximum allowable power dissipation at any ambient temperature is given: $PD_{(max)} = (T_J(max) - T_{amb})/\theta_{JA}$, exceeding the maximum allowable power limit will result in excessive die temperature; thus, the regulator will go into thermal shutdown. The junction to ambient thermal resistance, θ_{JA} of some packages may be different; the value of θ_{JA} depends on mounting technique.

RECOMMENDED OPERATING CONDITIONS


| Characteristics | Symbol | Ratings | Unit |
|--------------------------------------|----------|----------|------|
| Input voltage | V_{IN} | 12 | V |
| Operating Junction Temperature Range | T_J | 0 ~ +125 | °C |

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}\text{C}$, unless otherwise specified. Limits appearing in Boldface type apply over the entire junction temperature range for operation, 0°C to 125°C .)

| Characteristics | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|--|--------|--|----------------|---|----------------|----------------|
| Reference Voltage | VREF | SA1084-ADJ, IOUT=10mA, VIN-VOUT=3V, 10mA≤IOUT≤5A, 1.5V≤VIN-VOUT≤5V | 1.238 1.225 | 1.250 1.250 | 1.262 1.270 | V |
| Output Voltage | VOUT | SA1084-1.5, IOUT=10mA, VIN=4.5V, 10mA≤IOUT≤5A, 3.0V≤VIN≤6V | 1.485 1.47 | 1.5 1.5 | 1.515 1.53 | V |
| | | SA1084-1.8, IOUT=10mA, VIN=4.8V, 10mA≤IOUT≤5A, 3.3V≤VIN≤6V | 1.782 1.764 | 1.8 1.8 | 1.818 1.836 | V |
| | | SA1084-2.5, IOUT=10mA, VIN=5.5V 10mA≤IOUT≤5A, 4.0V≤VIN≤7V | 2.475 2.45 | 2.5 2.5 | 2.525 2.55 | V |
| | | SA1084-3.3, IOUT=10mA, VIN=6.3V, 10mA≤IOUT≤5A, 4.8V≤VIN≤8V | 3.267 3.234 | 3.3 3.3 | 3.333 3.366 | V |
| | | SA1084-5.0, IOUT=10mA, VIN=8V, 10mA≤IOUT≤5A, 6.5V≤VIN≤10V | 4.95 4.9 | 5 5 | 5.05 5.1 | V |
| | | Line Regulation | ΔVOUT | SA1084-ADJ, IOUT=10mA, 2.85V≤VIN≤10V | | 0.015 0.035 |
| SA1084-1.5, IOUT=10mA, 3.0V≤VIN≤10V | | | | 0.5 1 | 6 6 | mV |
| SA1084-1.8, IOUT=10mA, 3.3V≤VIN≤10V | | | | 0.5 1 | 6 6 | mV |
| SA1084-2.5, IOUT=10mA, 4.0V≤VIN≤10V | | | | 0.5 1 | 6 6 | mV |
| SA1084-3.3, IOUT=10mA, 4.8V≤VIN≤10V | | | | 0.5 1 | 6 6 | mV |
| SA1084-5.0, IOUT=10mA, 6.5V≤VIN≤10V | | | | 0.5 1 | 10 10 | mV |
| Load Regulation | ΔVOUT | SA1084-ADJ, 0mA≤IOUT≤5A, VIN-VOUT=3V | | 0.1 0.2 | 0.3 0.4 | % |
| | | SA1084-1.5, 0mA≤IOUT≤5A, VIN-VOUT=3V | | 3 7 | 15 20 | mV |
| | | SA1084-1.8, 0mA≤IOUT≤5A, VIN-VOUT=3V | | 3 7 | 15 20 | mV |
| | | SA1084-2.5, 0mA≤IOUT≤5A, VIN-VOUT=3V | | 3 7 | 15 20 | mV |

| Characteristics | Symbol | Conditions | Min. | Typ. | Max. | Unit |
|-----------------------------|------------------|--|------|---------|----------|--------------|
| Load Regulation | ΔV_{OUT} | SA1084-3.3, $0mA \leq I_{OUT} \leq 5A$, $V_{IN} - V_{OUT} = 3V$ | | 3 7 | 15 20 | mV |
| | | SA1084-5.0, $0mA \leq I_{OUT} \leq 5A$, $V_{IN} - V_{OUT} = 3V$ | | 5 10 | 20 35 | mV |
| Dropout Voltage | V_{DROP} | $I_{OUT} = 5A$, ΔV_{REF} , $\Delta V_{OUT} = 1\%$ | | 1.45 | 1.5 | V |
| Current Limit | I_{LIMIT} | $V_{IN} - V_{OUT} = 3V$ | 5.5 | 6.5 | | A |
| Minimum Load Current | $I_{LOAD (MIN)}$ | $V_{IN} = 10V$ (SA1084-ADJ) | | 3 | 10 | mA |
| Quiescent Current | I_Q | $V_{IN} = 10V$ (SA1084) | | 5 | 10 | mA |
| Ripple Rejection | PSRR | fRIPPLE=120Hz, $C_{OUT} = 25\mu F$ Tantalum, $I_{OUT} = 5A$, $V_{IN} - V_{OUT} = 3V$ | 60 | 72 | | dB |
| Adjust Pin Current | I_{ADJ} | $V_{IN} = 4.25V$, $I_{OUT} = 10mA$ | | 55 | 120 | μA |
| Adjust Pin Current Change | ΔI_{ADJ} | $10mA \leq I_{OUT} \leq 5A$, $1.5V \leq (V_{IN} - V_{OUT}) \leq 4.5V$ | | 0.2 | 5 | μA |
| Temperature Stability | | $I_{OUT} = 10mA$, $V_{IN} - V_{OUT} = 1.5V$ | | 0.5 | | % |
| Long Term Stability | | $T_{amb} = 125^\circ C$, 1000Hrs | | 0.5 | | % |
| RMS Noise (% of V_{OUT}) | | $10Hz \leq f \leq 10kHz$ | | 0.003 | | % |
| Thermal Resistance | θ_{JA} | TO-263-3L | | 60 | | $^\circ C/W$ |
| | | TO-263-2L | | 60 | | |
| | | TO-220-3L | | 60 | | |
| | | TO-252-2L | | 100 | | |

PIN CONFIGURATION

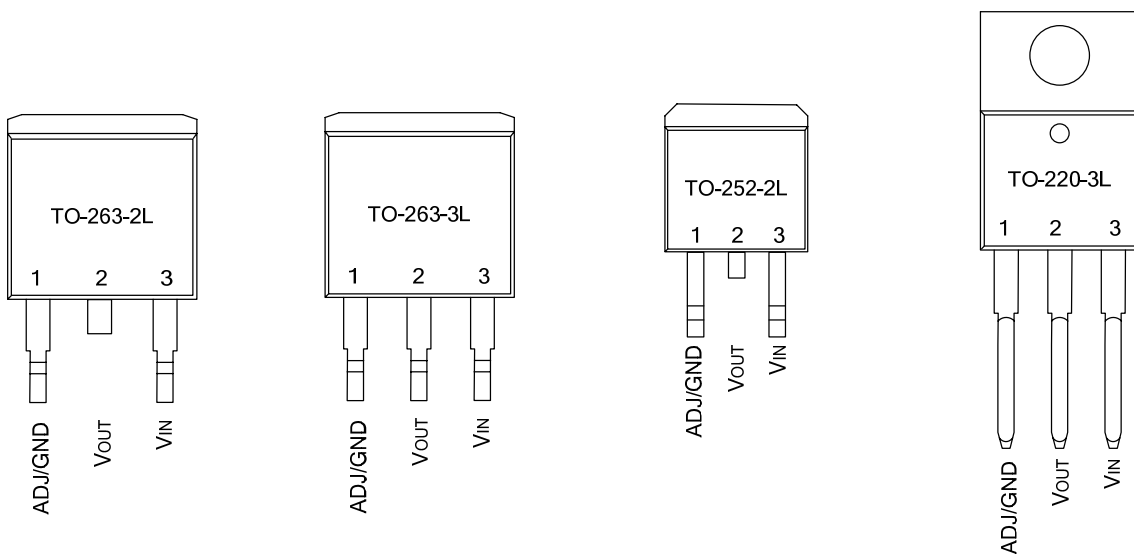

PIN DESCRIPTION

| Pin No. | Pin name | I/O | Functions |
|---------|----------|-----|----------------------|
| 1 | GND/ADJ | G/O | Ground/ADJ |
| 2 | VOUT | O | Output voltage |
| 3 | VIN | I | Input supply voltage |

FUNCTION DESCRIPTION

The SA1084 is a LDO regulator, its pass transistor is made up of a single NPN transistor being driven by a PNP. The dropout voltage is defined as: $V_{DROP} = V_{BE} + V_{SAT}$.

The SA1084 series of fixed and adjustable regulators are easy to use. Output voltages are 1.5V, 1.8V, 2.5V, 3.3V, and 5.0V. On-chip thermal shut down provides protection against any combination of overload and ambient temperature that would create excessive junction temperature.

The SA1084 requires an output capacitor for device stability. Its value of 22μF tantalum covers all cases of bypassing the adjustment terminal. Without bypassing the adjustment terminal smaller capacitors can be used with equally good results .depends upon the application circuit. In general, linear regulator stability decreases with higher output currents.

TYPICAL APPLICATION CIRCUIT

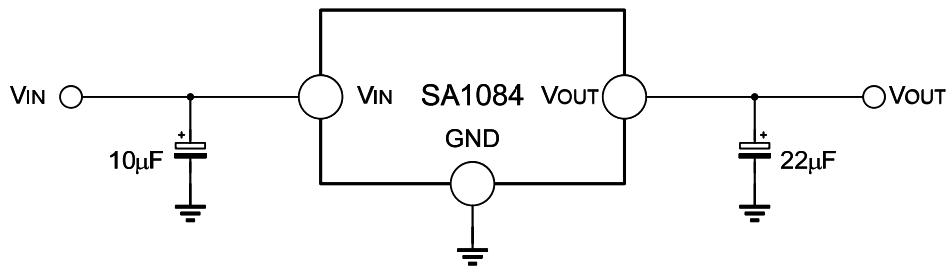


Figure 1. Typical Fixed Output Voltage







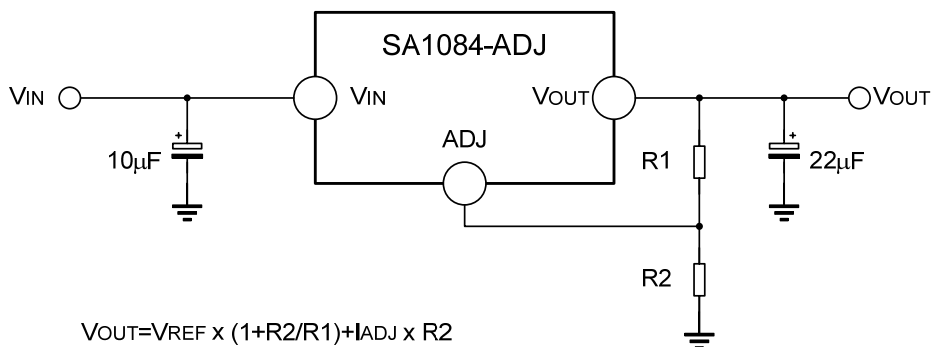



Figure 2. Typical Adjustable Output Voltage

Note: The circuit and parameters are reference only, please set the parameters of the real application circuit based on the real test.

TYPICAL CHARACTERISTICS CURVES

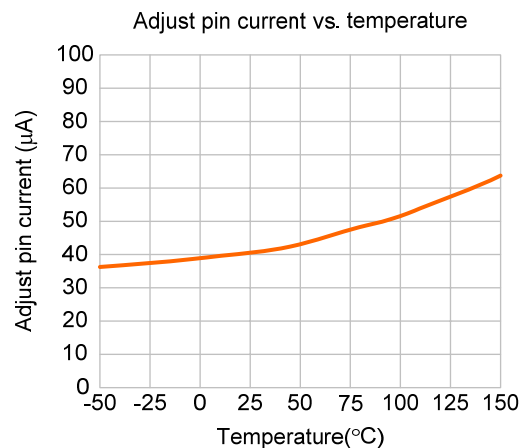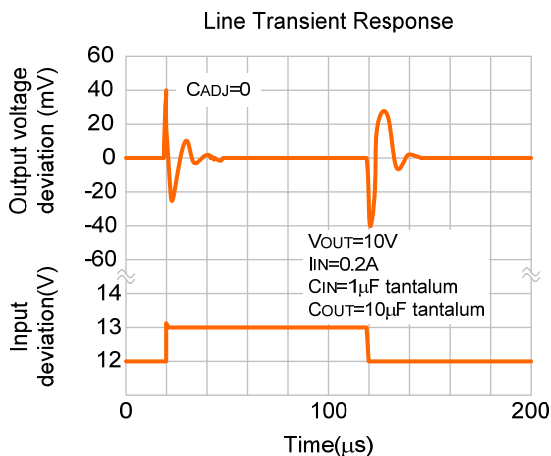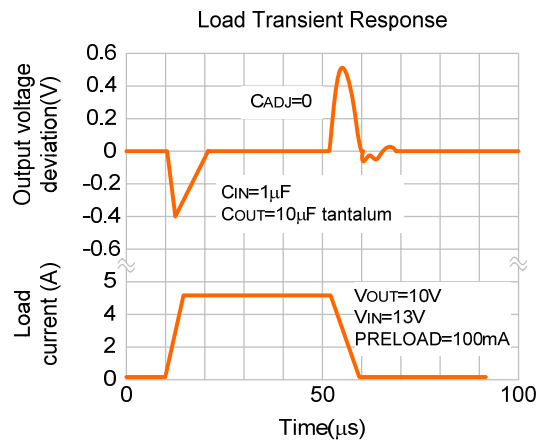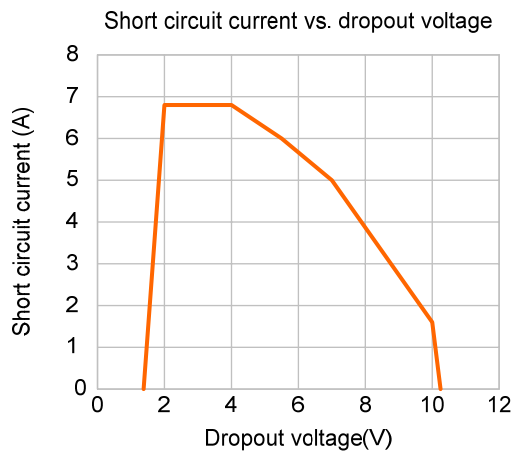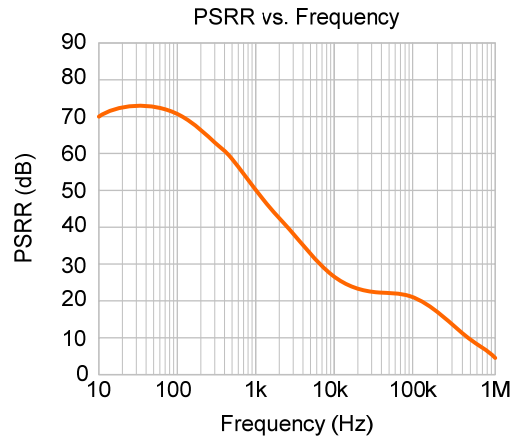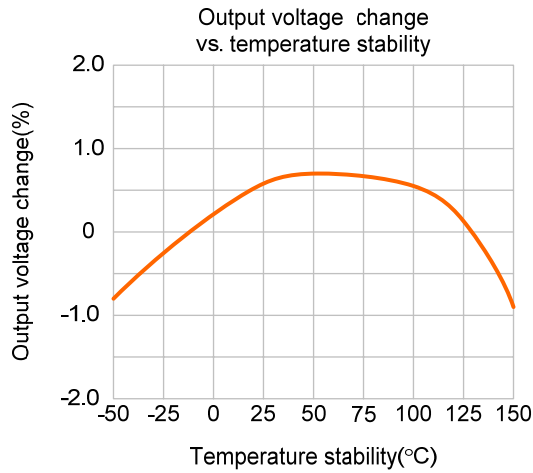


PACKAGE OUTLINE

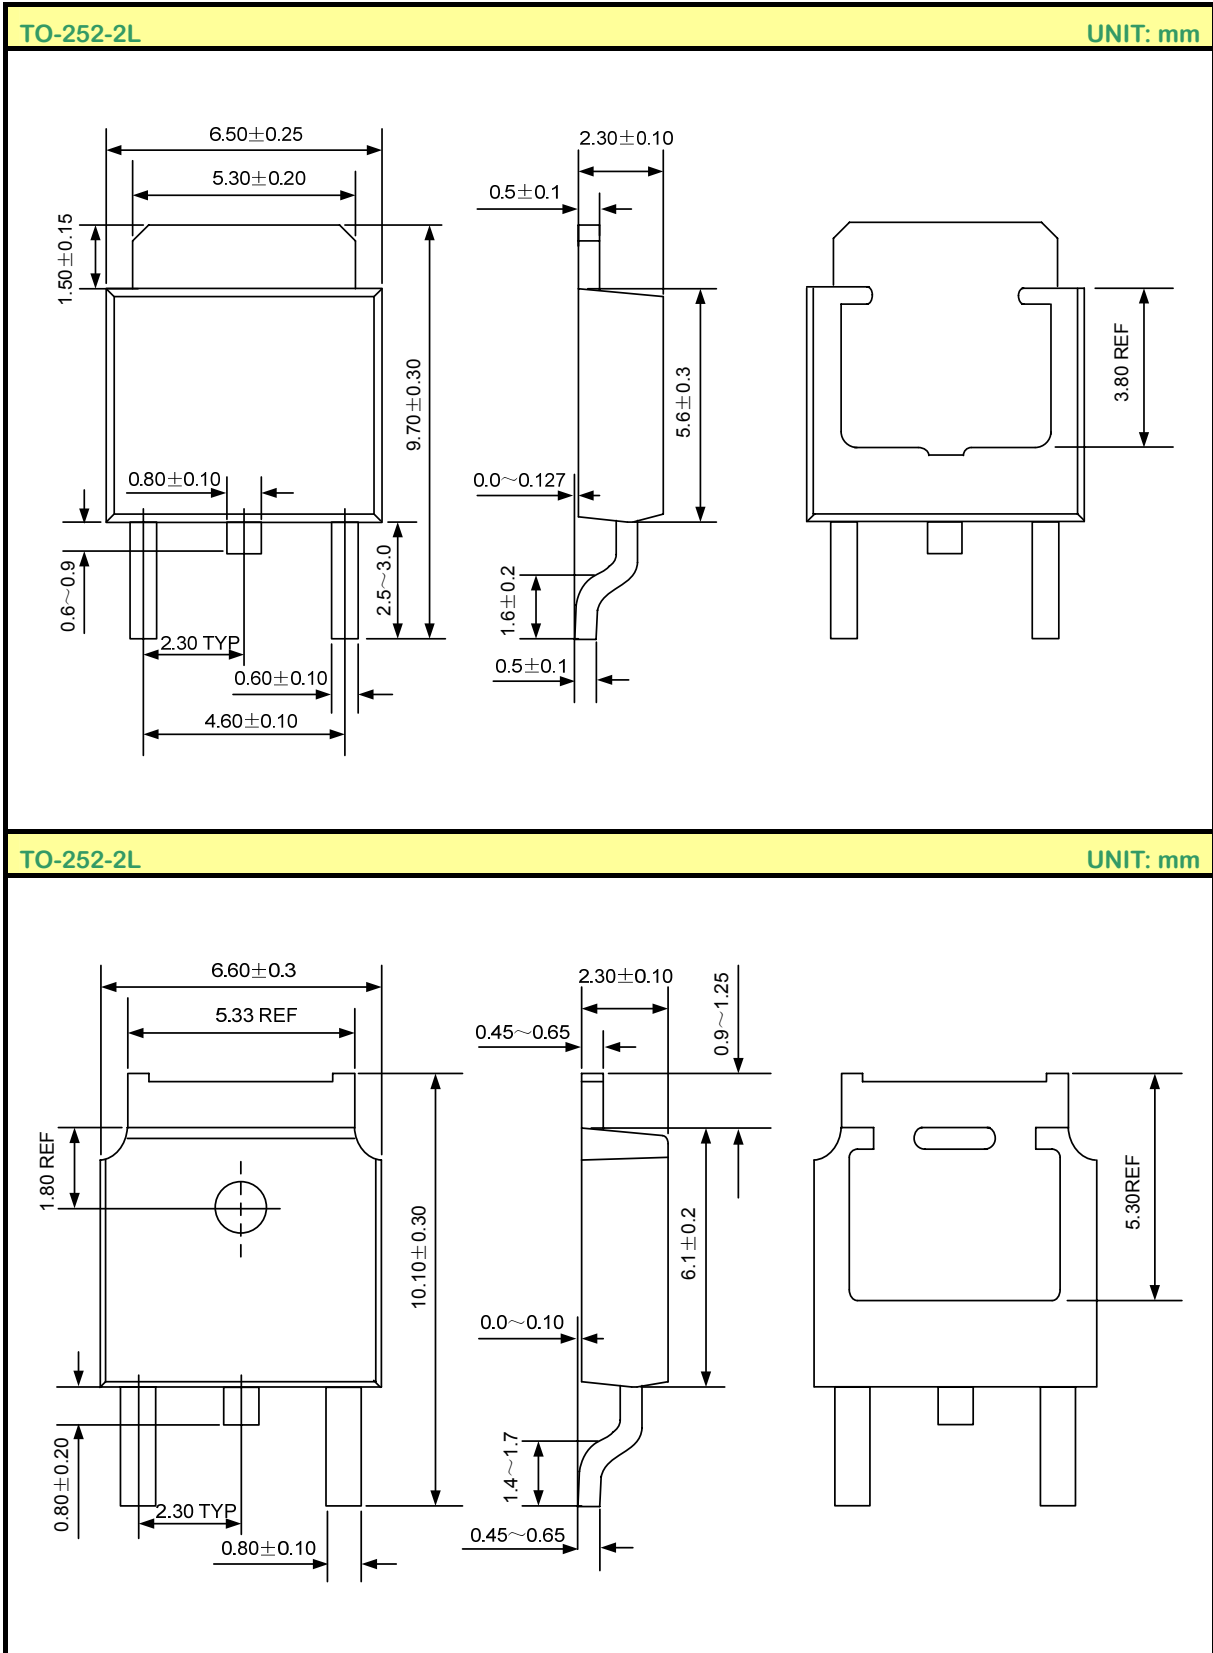

PACKAGE OUTLINE


TO-220-3L

UNIT: mm

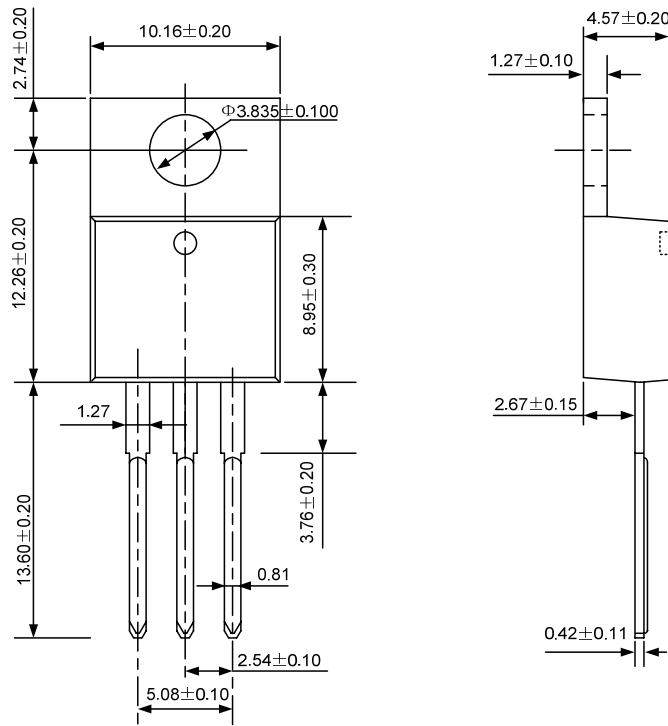


TO-263-2L

UNIT: mm

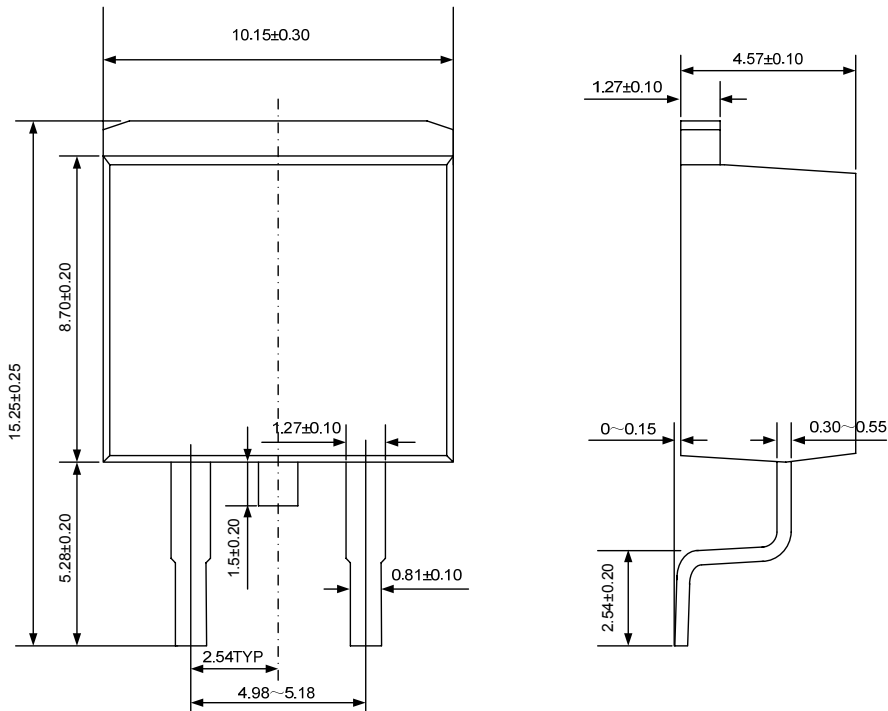

PACKAGE OUTLINE

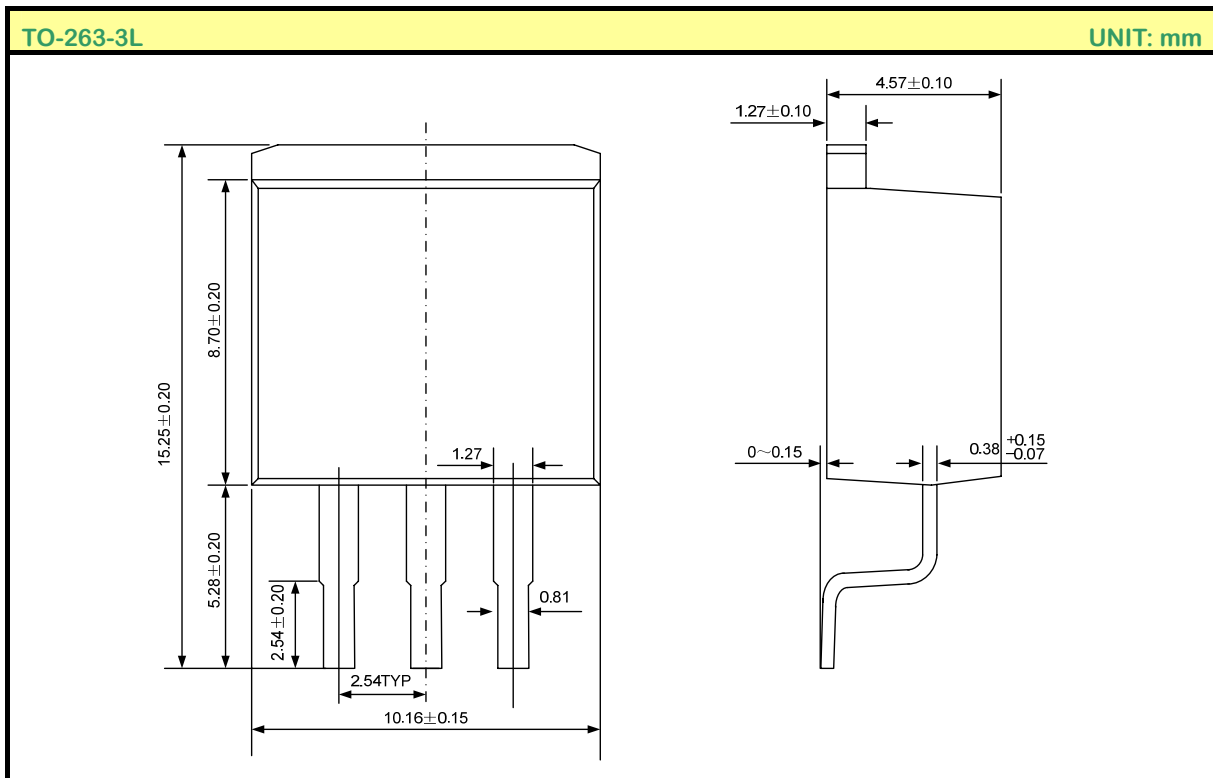

Disclaimer:

- Silan reserves the right to make changes to the information herein for the improvement of the design and performance without further notice!
- All semiconductor products malfunction or fail with some probability under special conditions. When using Silan products in system design or complete machine manufacturing, it is the responsibility of the buyer to comply with the safety standards strictly and take essential measures to avoid situations in which a malfunction or failure of such Silan products could cause loss of body injury or damage to property.
- Silan will supply the best possible product for customers!