




特性: FEATURES

- ◆大电流承受能力.High current capability
- ◆正向压降低.Low forward voltage drop
- ◆低漏电. Low leakage current
- ◆高浪涌承受能力.High surge current capability

机械性能: MECHANICAL DATA

- ◆小铜粒: $\Phi 0.258 (6.55) \times 0.0394(1.0)$ 厚度
Small copper: $\Phi 0.258 (6.55) \times 0.0394(1.0)$ Thick
- ◆大铜粒: $\Phi 0.285(7.23) \times 0.0295(0.75)$ 厚度
Large copper: $\Phi 0.285(7.23) \times 0.0295(0.75)$ Thick
- ◆外观信息: $\Phi 0.285 (7.23) \times 0.08 (2.05 \pm 0.05)$ 厚度
Outline information: $\Phi 0.285 (7.23) \times 0.08 (2.05 \pm 0.05)$ Thick
- ◆极 性: 大铜粒端为阴极。
Polarity: Large copper cathode

SC

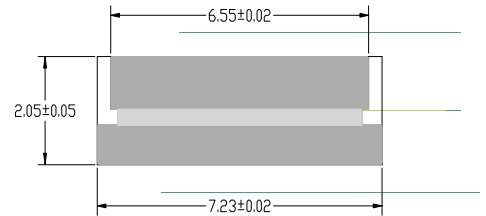

Dimension in millimeters: mm

极限值和电参数

TA= 25°C除非另有规定. 单相,正半弦波,60HZ,阻抗或电感负载.为电容装载,减少电流的 20%

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C Ambient temp. Unless otherwise specified.Single phase, half sine wave, 60HZ,resistive or inductive load.

型 号 TYPE	符 号	SC50A	SC50B	SC50D	SC50G	SC50J	SC50K	SC50M	单 位
最大峰值反向电压 Maximum Current Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
最大反向有效值电压 Working Peak Reverse Voltage	V_{RMS}	35	70	140	280	420	560	700	V
最大直流截止电压 Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
最大正向平均整流电流Ta=125°C, Maximum Average Forward Rectified Current	$I_{F(AV)}$	50							A
峰值正向浪涌电流 Peak Forward Surge Current 8.3ms Single Sine-wave on Rated Load (JEDEC Method)	I_{FSM}	500							A
最大瞬间正向压降@100A Maximum Instantaneous Forward Voltage Drop at 100A DC	V_F	1.03							V
最大反向直流电流 Maximum DC Reverse Current Ta = 25°C at Rated DCBlocking Voltage Ta =150°C	I_R	1.0 200							μA
典型结电容 Typical Junction Capacitance (NOTE 1)	C_J	300							pF
工作及储存温度范围 Operating AND Storage Temperature Range	T_J, T_{STG}	-55~+195							°C

注 释 : NOTE 在 1MHz 下测量, 施加 4.0V D.C 的反向电压. Measured at 1 MHz and Applied Reverse Voltage of 4.0 Volts D.C.



FIG. 1 –最大正向平均电流降额
FIG. 1 –MAXIMUM AVERAGE FORWARD CURRENT DERATING

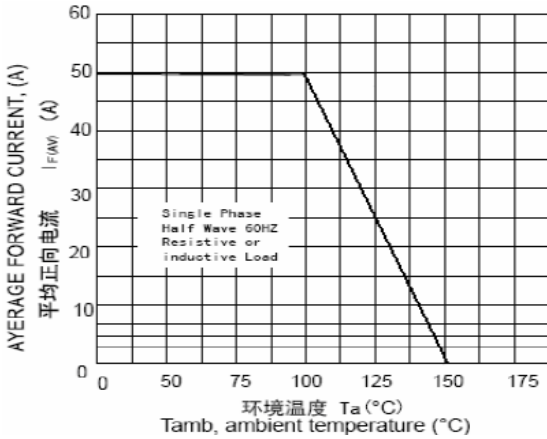


FIG. 3 –反向特性曲线(典型)
FIG. 3 – TYPICAL REVERSE CHARACTERISTICS

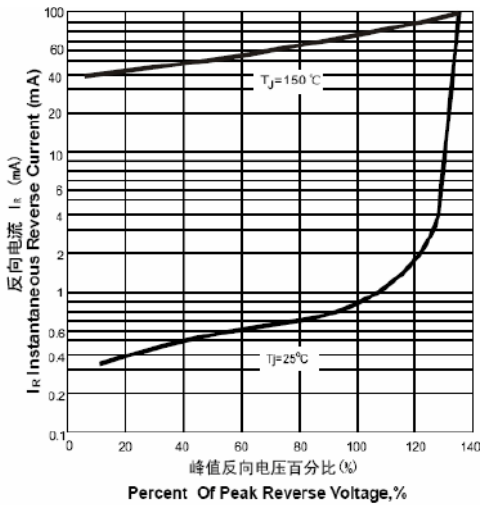


FIG.5–结电容特性曲线
FIG.5–TYPICAL JUNCTION CAPACITANCE

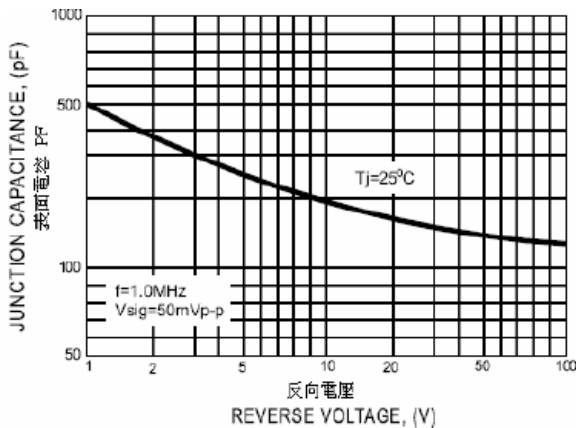


FIG. 2 –最大非重复正向浪涌电流
FIG. 2 –MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

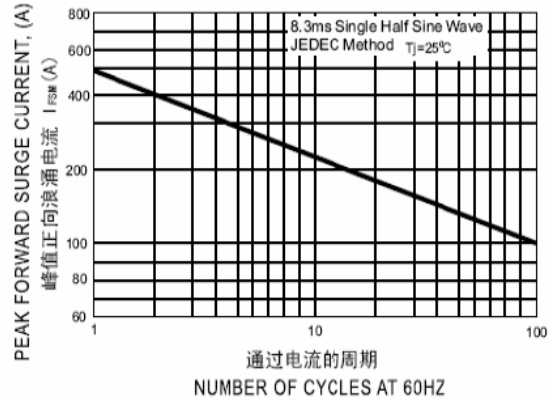


FIG. 4–正向特性曲线(典型)
FIG.4 – TYPICAL FORWARD CHARACTERISTICS

