



S E M I C O N D U C T O R

SRF820CT THRU SRF8200CT

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts


Forward Current - 8.0 Amperes

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- High current capability, Low forward voltage drop
- Single rectifier construction
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 260°C/10 seconds, 0.25"(6.35mm) from case
- Component in accordance to RoHS 2011/65/EU



ITO-220AB

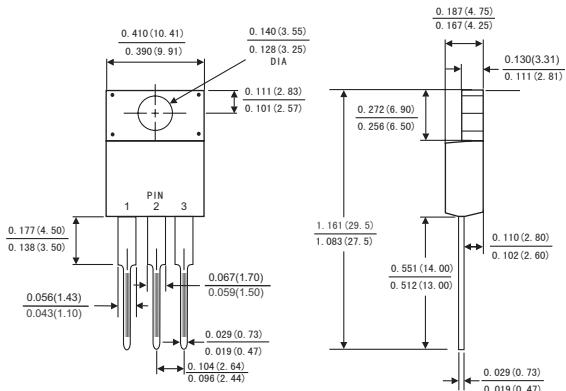

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Case: JEDEC I TO-220AB molded plastic body
- Terminals: Lead solderable per MIL-STD-750, method 2026
- Polarity: As marked
- Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, resistive or inductive load. For capacitive load, derate by 20%.)

	Symbols	SRF 820CT	SRF 830CT	SRF 840CT	SRF 860CT	SRF 8100CT	SRF 8150CT	SRF 8200CT	Units
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	60	100	150	200	Volts
Maximum RMS voltage	V _{RMS}	14	21	28	42	70	105	140	Volts
Maximum DC blocking voltage	V _{DC}	20	30	40	60	100	150	200	Volts
Maximum average forward rectified current (see Fig.1)	I _(AV)				4.0				Amps
					8.0				
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}				150.0				Amps
Maximum instantaneous forward voltage at 8.0 A (Notes 1)	V _F		0.60		0.75	0.85	0.90	0.95	Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Notes 1)	T _{A=25°C}		200			50			µA
	T _{A=100°C}		5			—			
	T _{A=125°C}		—			5			mA
Typical thermal resistance (Notes 2)	R _{θJC}			2.5					°C/W
Operating junction temperature range	T _J			-55 to +150					°C
Storage temperature range	T _{STG}			-55 to +150					°C

Notes: 1. Pulse test: 300µs pulse width, 1% duty cycle

2. Thermal resistance from junction to case

RATINGS AND CHARACTERISTIC CURVES SRF820CT THRU SRF8200CT

FIG.1-FORWARD CURRENT DERATING CURVE

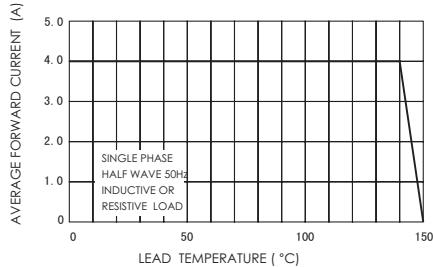


FIG.2-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

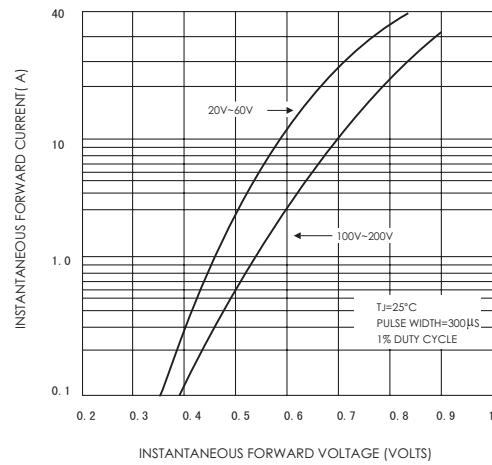


FIG.4-TYPICAL JUNCTION CAPACITANCE

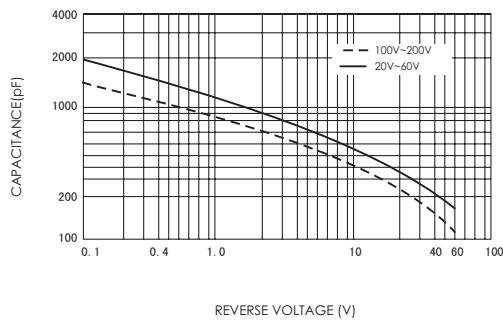


FIG.3-TYPICAL REVERSE CHARACTERISTICS

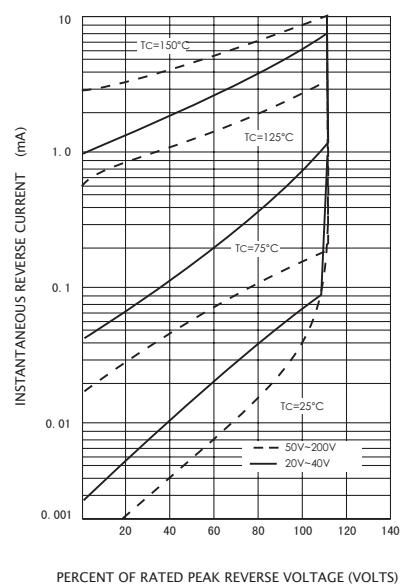


FIG.5-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

