


ULTRA LOW CAPACITANCE STEERING DIODE ARRAY

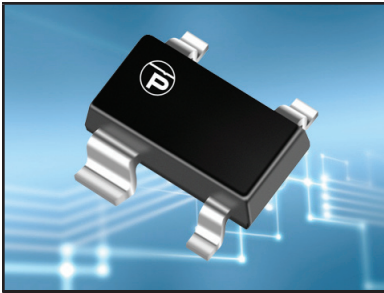

SOT-143 PACKAGE

DESCRIPTION

The USB004 is an ultra low capacitance (typically 3pF) steering diode array. This device provides circuit protection for interfaces and wireless bus applications and portable electronics. The USB004 is ideally suited to protect USB data I/O ports against the effects of ESD and EFT.

The USB004 meets the requirements of IEC 61000-4-2 (ESD) and IEC 61000-4-4 (EFT). At higher operating frequencies or faster edge rates, insertion loss and signal integrity are a major concern. The USB004 offers a ultra low capacitance and low leakage current in a SOT-143 package.

FEATURES

- Compatible with IEC 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- Compatible with IEC 61000-4-4 (EFT): 40A - 5/50ns
- Provides 2 Lines of Protection
- Low Leakage Current < 1.0 μ A
- Ultra Low Capacitance: 3pF Typical
- RoHS Compliant
- REACH Compliant


APPLICATIONS

- USB Interface Ports
- SMART Phones
- Video
- Portable Electronics
- Laptops

MECHANICAL CHARACTERISTICS

- Molded JEDEC SOT-143 Package
- Approximate Weight: 9 milligrams
- Lead-Free Pure-Tin Plating (Annealed)
- Solder Reflow Temperature:
Pure-Tin - Sn, 100: 260-270°C
- 8mm Tape and Reel Per EIA Standard 481
- Flammability Rating UL 94V-0

PIN CONFIGURATION



TYPICAL DEVICE CHARACTERISTICS
MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

| PARAMETER | SYMBOL | VALUE | UNITS |
|--|-----------|------------|-------|
| Operating Temperature | T_A | -55 to 150 | °C |
| Storage Temperature | T_{STG} | -55 to 150 | °C |
| Continuous Power Dissipation | P_{PC} | 225 | mW |
| Repetitive Peak Forward Current @ $t_p = 5\mu s$, $F = 50kHz$ (Pin 2-3) | I_{FRM} | 700 | mA |

ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

| PART NUMBER | DEVICE MARKING | REPETITIVE PEAK REVERSE VOLTAGE (Note 1) @ 10 μA V_{RRM} VOLTS | MAXIMUM REVERSE LEAKAGE CURRENT (Note 2) @ V_{RRM} @ 5V I_R μA | MAXIMUM DIODE FORWARD VOLTAGE @ 20mA V_F VOLTS | MAXIMUM CAPACITANCE (Note 3) C_J pF |
|-------------|----------------|--|--|---|---|
| USB004 | PSA | 20 | 1 | 0.95 | 6 |

NOTES

- $V_p - V_N = 20$ Volts.
- $V_p - V_N = 5.5$ Volts.
- Between line and ground - $V_p = 5$ Volts, $f = 1$ MHz, $V_{IO} = 2.5$ Volts, $V_N = 0$ Volts.

TYPICAL DEVICE CHARACTERISTICS

FIGURE 1
PEAK FORWARD CURRENT VS FORWARD VOLTAGE


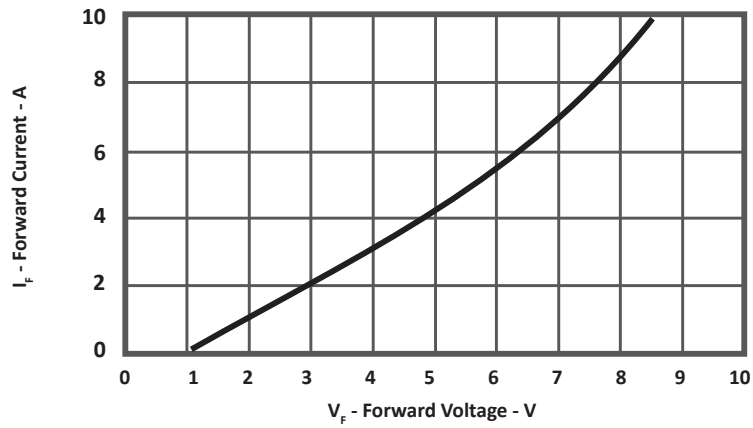


FIGURE 2
LOW FORWARD CURRENT VS FORWARD VOLTAGE

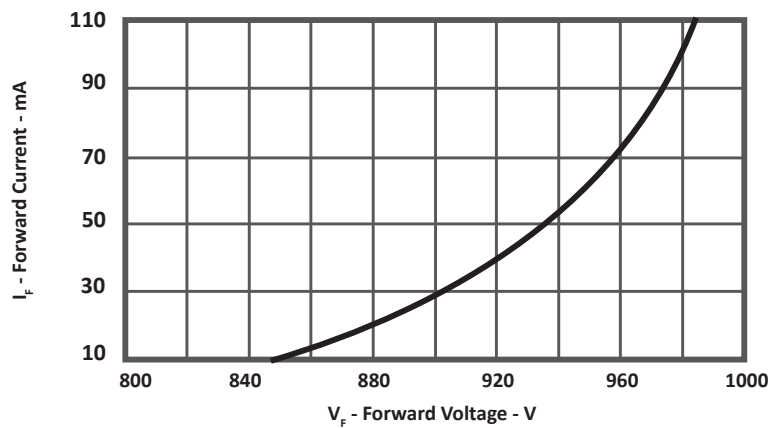


SOT-143 PACKAGE INFORMATION

OUTLINE DIMENSIONS

| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|--------|-------|
| | MIN | MAX | MIN | MAX |
| A | 2.80 | 3.04 | 0.110 | 0.120 |
| B | 1.20 | 1.39 | 0.047 | 0.055 |
| C | 0.84 | 1.14 | 0.033 | 0.045 |
| D | 0.39 | 0.50 | 0.015 | 0.020 |
| F | 0.79 | 0.93 | 0.031 | 0.037 |
| G | 1.78 | 2.03 | 0.070 | 0.080 |
| J | 0.08 | 0.15 | 0.003 | 0.006 |
| K | 0.46 | 0.60 | 0.018 | 0.024 |
| L | 0.445 | 0.60 | 0.0175 | 0.024 |
| L1 | 0.40 | 0.60 | 0.016 | 0.024 |
| R | 0.72 | 0.83 | 0.028 | 0.033 |
| S | 2.11 | 2.48 | 0.083 | 0.098 |

NOTES

1. Dimensioning and tolerances per ANSI Y14.M, 1985.
2. Controlling dimension: inches.
3. Dimensions are exclusive of mold flash and metal burrs.

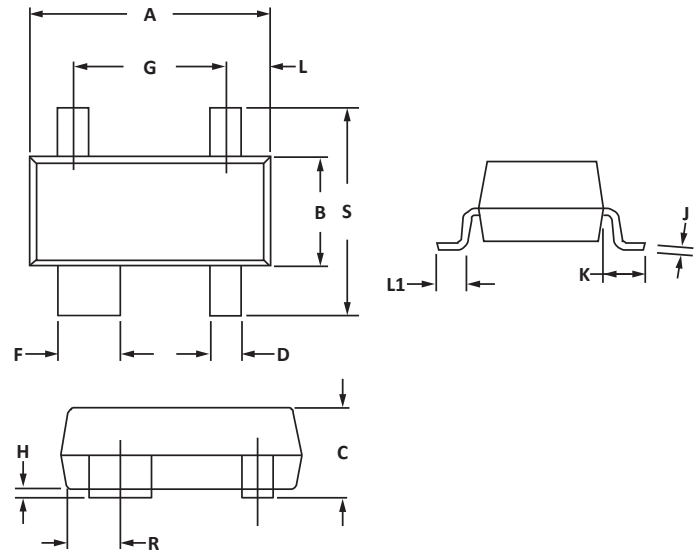


PAD LAYOUT DIMENSIONS


| DIM | MILLIMETERS | | INCHES | |
|-----|-------------|------|--------|-------|
| | MIN | MAX | MIN | MAX |
| A | 1.88 | 2.13 | 0.074 | 0.084 |
| B | 1.80 | 2.06 | 0.071 | 0.081 |
| C | 0.71 | 0.97 | 0.028 | 0.038 |
| D | 0.76 | 1.02 | 0.030 | 0.040 |
| E | 1.07 | 1.32 | 0.042 | 0.052 |
| F | 0.71 | 0.97 | 0.028 | 0.038 |

NOTES

1. Controlling dimension: inches.

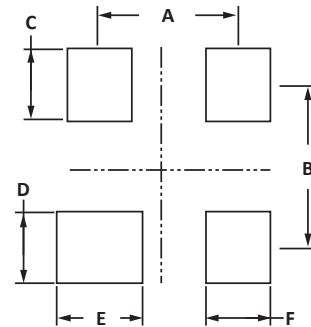

TAPE AND REEL

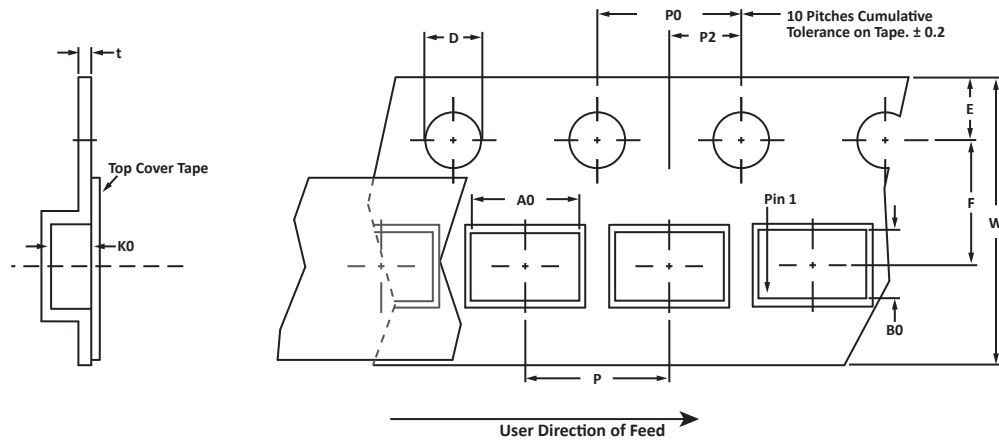

SPECIFICATIONS

| REEL DIA. | TAPE WIDTH | A0 | B0 | K0 | D | E | F | W | P0 | P2 | P | tmax |
|------------|------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|------|
| 178mm (7") | 8mm | 3.10 ± 0.10 | 2.70 ± 0.10 | 1.35 ± 0.10 | 1.50 ± 0.10 | 1.75 ± 0.10 | 3.50 ± 0.05 | 8.00 ± 0.30 | 4.00 ± 0.10 | 2.00 ± 0.05 | 4.00 ± 0.10 | 0.25 |

NOTES

1. Dimensions are in millimeters.
2. Surface mount product is taped and reeled in accordance with EIA-481.
3. Suffix - T7 = 7" Reel - 3,000 pieces per 8mm tape.
4. Suffix - T13 = 13" Reel - 10,000 pieces per 8mm tape.
5. Marking on Part - marking code (see page 2) and date code.

Package outline, pad layout and tape specifications per document number 06011.R4 8/10.

ORDERING INFORMATION

| BASE PART NUMBER | LEADFREE SUFFIX | TAPE SUFFIX | QTY/REEL | REEL SIZE | TUBE QTY |
|------------------|-----------------|-------------|----------|-----------|----------|
| USB004 | -LF | -T7 | 3000 | 7" | n/a |
| USB004 | -LF | -T13 | 10,000 | 13" | n/a |

COMPANY INFORMATION

COMPANY PROFILE

ProTek Devices, based in Tempe, Arizona USA, is a manufacturer of Transient Voltage Suppression (TVS) products designed specifically for the protection of electronic systems from the effects of lightning, Electrostatic Discharge (ESD), Nuclear Electromagnetic Pulse (NEMP), inductive switching and EMI/RFI. With over 25 years of engineering and manufacturing experience, ProTek designs TVS devices that provide application specific protection solutions for all electronic equipment/systems.

ProTek Devices Analog Products Division, also manufactures analog interface, control, RF and power management products.

CONTACT US

Corporate Headquarters

2929 South Fair Lane
Tempe, Arizona 85282
USA

By Telephone

General: 602-431-8101
Sales: 602-414-5109
Customer Service: 602-414-5114

By Fax

General: 602-431-2288

By E-mail:

Sales: sales@protekdevices.com
Customer Service: service@protekdevices.com
Technical Support: support@protekdevices.com

Web

www.protekdevices.com
www.protekanalog.com

COPYRIGHT © ProTek Devices 2007 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.