

# WDD20 SERIES

DC - DC CONVERTER  
15 ~ 20W SINGLE & DUAL OUTPUT



## FEATURES

- EFFICIENCY UP TO 89%
- 2:1 WIDE INPUT RANGE
- I/O ISOLATION
- INPUT Pi FILTER
- SHORT CIRCUIT PROTECTION
- HIGH PERFORMANCE
- 2 YEARS WARRANTY

## MODEL LIST

MODEL NO.	INPUT VOLTAGE	INPUT CURRENT (typ.)	OUTPUT WATTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT	EFF. (min.)	EFF. (typ.)	CAPACITOR LOAD (max.)
-----------	---------------	----------------------	----------------	----------------	----------------	-------------	-------------	-----------------------

### Single Output Models

WDD20 - 03S1	9~18 VDC	1.6 A	15 WATTS	+3.3 VDC	4500 mA	77%	80%	7000 $\mu$ F
WDD20 - 05S1	9~18 VDC	2.0 A	20 WATTS	+ 5 VDC	4000 mA	81%	83%	7000 $\mu$ F
WDD20 - 12S1	9~18 VDC	2.0 A	20 WATTS	+ 12 VDC	1670 mA	84%	86%	1000 $\mu$ F
WDD20 - 15S1	9~18 VDC	1.95 A	20 WATTS	+ 15 VDC	1330 mA	85%	87%	470 $\mu$ F
WDD20 - 03S2	18~36 VDC	0.78 A	15 WATTS	+3.3 VDC	4500 mA	78%	80%	7000 $\mu$ F
WDD20 - 05S2	18~36 VDC	1.0 A	20 WATTS	+ 5 VDC	4000 mA	83%	85%	7000 $\mu$ F
WDD20 - 12S2	18~36 VDC	1.0 A	20 WATTS	+ 12 VDC	1670 mA	84%	86%	1000 $\mu$ F
WDD20 - 15S2	18~36 VDC	0.96 A	20 WATTS	+ 15 VDC	1330 mA	86%	88%	470 $\mu$ F
WDD20 - 03S3	36~72 VDC	0.39 A	15 WATTS	+3.3 VDC	4500 mA	78%	80%	7000 $\mu$ F
WDD20 - 05S3	36~72 VDC	0.5 A	20 WATTS	+ 5 VDC	4000 mA	83%	85%	7000 $\mu$ F
WDD20 - 12S3	36~72 VDC	0.49 A	20 WATTS	+ 12 VDC	1670 mA	85%	87%	1000 $\mu$ F
WDD20 - 15S3	36~72 VDC	0.48 A	20 WATTS	+ 15 VDC	1330 mA	86%	88%	470 $\mu$ F

### Dual Output Models

WDD20 - 12D1	9~18 VDC	2.0 A	20 WATTS	$\pm$ 12 VDC	$\pm$ 830 mA	83%	85%	$\pm$ 470 $\mu$ F
WDD20 - 15D1	9~18 VDC	1.95 A	20 WATTS	$\pm$ 15 VDC	$\pm$ 670 mA	85%	87%	$\pm$ 470 $\mu$ F
WDD20 - 12D2	18~36 VDC	0.97 A	20 WATTS	$\pm$ 12 VDC	$\pm$ 830 mA	85%	87%	$\pm$ 470 $\mu$ F
WDD20 - 15D2	18~36 VDC	0.96 A	20 WATTS	$\pm$ 15 VDC	$\pm$ 670 mA	86%	88%	$\pm$ 470 $\mu$ F
WDD20 - 12D3	36~72 VDC	0.48 A	20 WATTS	$\pm$ 12 VDC	$\pm$ 830 mA	85%	87%	$\pm$ 470 $\mu$ F
WDD20 - 15D3	36~72 VDC	0.48 A	20 WATTS	$\pm$ 15 VDC	$\pm$ 670 mA	87%	89%	$\pm$ 470 $\mu$ F

## SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

GENERAL						
Characteristics	Conditions	min.	typ.	max.	unit	
Switching frequency	Vi nom, Io nom		180		KHz	
Isolation voltage	Input - Output	1500			VDC	
Isolation resistance	Input - Output, @ 500VDC	100			M $\Omega$	
Isolation capacitance	100KHz / 1V			1000	PF	

### SPECIFICATION

All Specifications Typical At Nominal Line, Full Load, 25°C Unless Otherwise Noticed

#### GENERAL

Characteristics	Conditions	min.	typ.	max.	unit
Ambient temperature	Vi nom, 3.3V & 5V output models	-25		+ 61	°C
	Io nom 12V, 15V & dual output models	-25		+ 71	°C
Case temperature	Operating at Vi nom, Io nom			+ 100	°C
Derating	Vi nom	See derating curve			
Storage temperature	Non operational	-40		+ 100	°C
Relative humidity	Vi nom, Io nom	20		95	% RH
Temperature coefficient	Vi nom, Io min			± 0.02	% / °C
Dimension		L50.8 x W40.64 x H10.16			mm
MTBF	Bel l core issue 6@40°C, GB		950000		Hours
Cooling	Free air convection				

#### INPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Input voltage range	Ta min ... Ta max, Io nom	9	12	18	VDC
		18	24	36	VDC
		36	48	72	VDC
No load input current	Vi nom, Io = 0	12V models		20	mA
		24V models		15	mA
		48V models		10	mA
Input voltage w/o damage	Io nom	12V models		20	VDC
		24V models		40	VDC
		48V models		75	VDC
Startup voltage	Io nom	12V models	8.5		VDC
		24V models	16		VDC
		48V models	33		VDC
Input filter	Pi type				

#### OUTPUT SPECIFICATIONS

Characteristics	Conditions	min.	typ.	max.	unit
Output voltage accuracy	Vi nom, Io nom			± 2	%
Minimum load	Vi nom single output models	0			%
	Io nom dual output models (each output)	10			%
Line regulation	Io nom, Vi min ... Vi max			± 1	%
Load regulation	Vi nom, Io 0 ... Io nom, single output models			± 2	%
	Vi nom, Io min ... Io nom, dual output models			± 5	%
Cross regulation (Dual model)	Aymmetrical load 10% - 100% FL			± 5	%
Startup time	Vi nom, Io nom			30	ms
Transient recovery time	Vi nom, I ~ 0.5 Io nom			500	µs
Ripple & noise	Vi nom, Io nom, 3.3V & 5V models			100	mV
	BW = 20MHz 12V, 15V & dual			150	mV
Voltage trim range 1)	Vi nom	3.3V model	± 5		%
		5V, 12V, 15V & dual	± 10		%
Efficiency	Vi nom, Io nom, Po / Pi	Up to 89%, See model list and efficiency curve			

NOTE 1 : Pls refer to Fig 1 & Table 1 for connection and resistance recommended.

#### CONTROL AND PROTECTION



Remote ON / OFF	ON : opened or 8 ~ 10VDC applied, reference to input GND OFF : -0.3 ~ 2VDC applied, reference to input GND
Input reversed	Shunt diode built in, external fuse recommended (12Vin : 3A, 24Vin : 1.5A, 48Vin : 1A)
Output short circuit	Current limited (Auto-recovery)
Rated over load protection	I 10%min.... I 40%max

### PHYSICAL CHARACTERISTICS

Case size	50.8 x 40.64 x 10.16 mm (2 x 1.6 x 0.4 inches)
Case material	Plastic base / Metal case
Weight	60 g
Patting material	Epoxy

### MECHANISM & PIN CONFIGURATION

mm [inch]

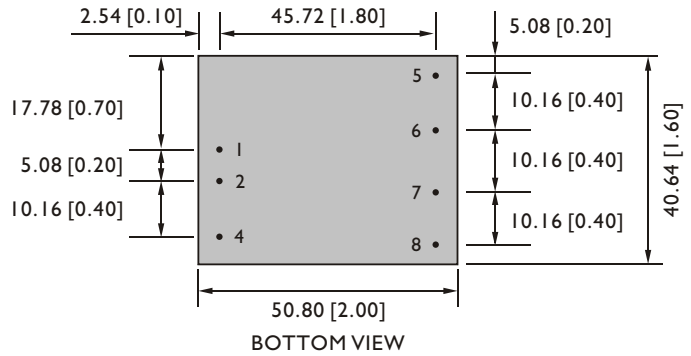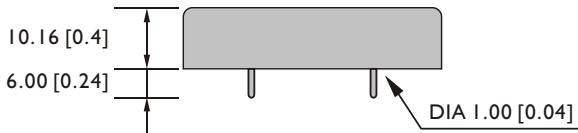

GENERAL TOLERANCE	
0.00[0.00] - 30.00[1.18]	±0.30[0.01]
30.00[1.18] - 120.00[4.72]	±0.50[0.02]


### PIN ASSIGNMENT

#### GENERAL


PIN NO.	1	2	4	5	6	7	8
SINGLE	Vi+	Vi-	ON / OFF	NO PIN	Vo+	Vo-	Trim
DUAL	Vi+	Vi-	ON / OFF	Vo+	com	Vo-	Trim

### CIRCUIT SCHEMATIC

• Block diagram for WDD20 series with single output

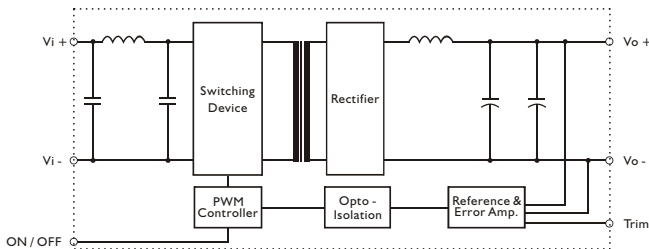


• Block diagram for WDD20 series with dual output

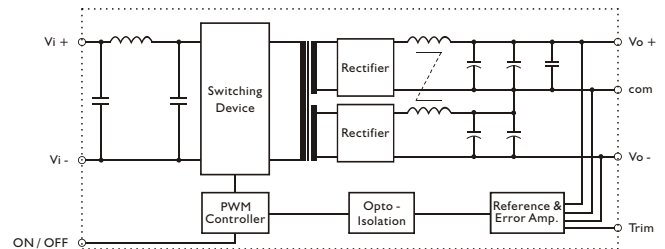

### RECOMMENDED CIRCUIT


• Recommended filter for EN55022 Class B compliance

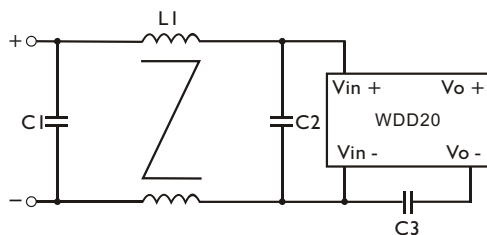




• The components used in the above figure, together with the manufacturer part numbers for these components, are as follows.

	C1	C2	C3	L1
WDD20-XXX1	3.3 μF / 50V MLCC	3.3 μF / 50V MLCC	InF / 2KV MLCC	1.5mH Common Choke
WDD20-XXX2	1 μF / 50V MLCC	1 μF / 50V MLCC	InF / 2KV MLCC	1.5mH Common Choke
WDD20-XXX3	3.3 μF / 100V MLCC	3.3 μF / 100V MLCC	InF / 2KV MLCC	3.5mH Common Choke

• Recommended EN 55022 Class B filter circuit layout.

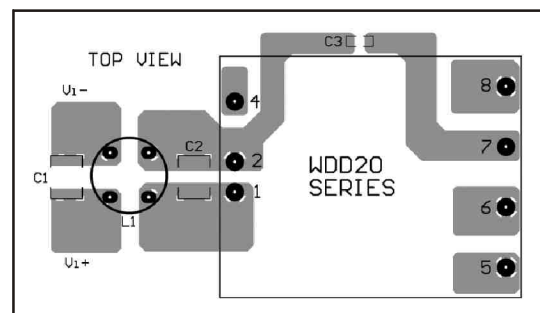


### DERATING AND EFFICIENCY CURVE

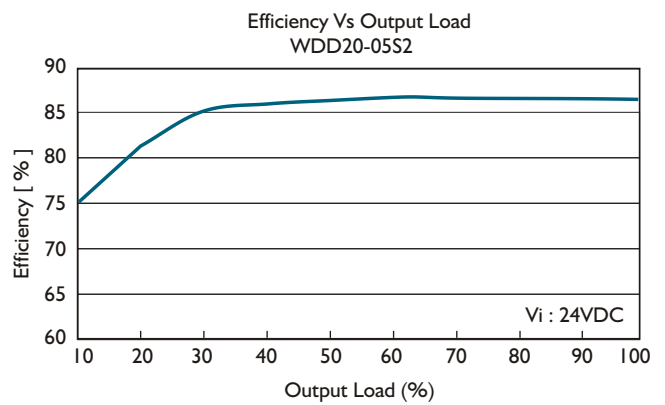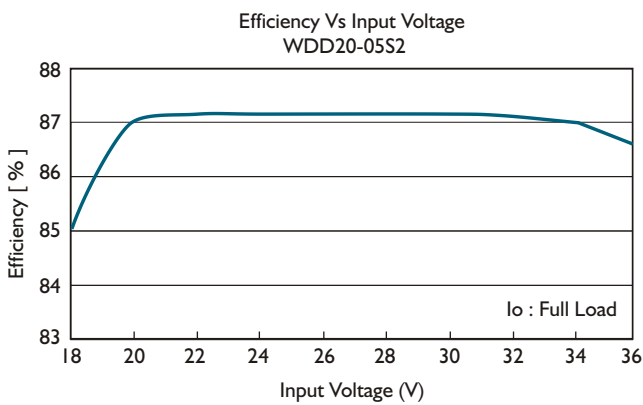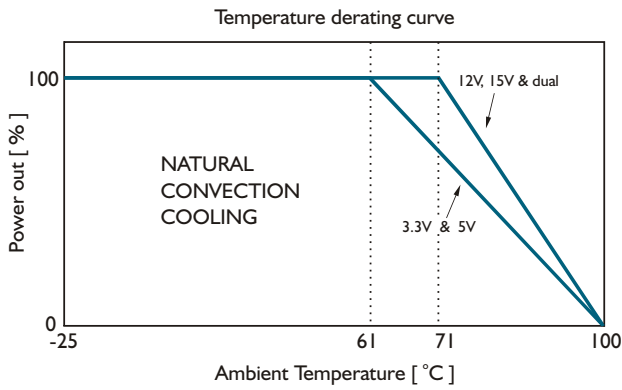


**Fig. 1 Trim connection**

( For Single output )

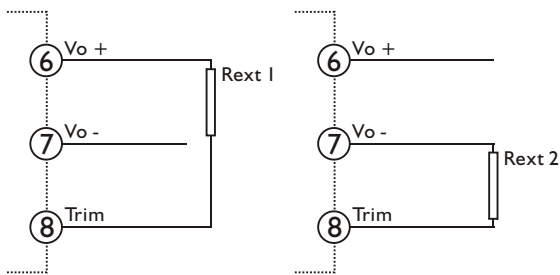

( For Dual output )

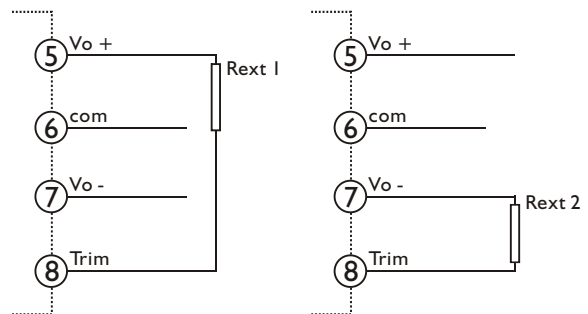

**Table 1 Typical resistor values for various output voltage adjustment settings**

Type	Rext 1		Rext 2	
	Vo nom -2.5%	Vo nom -5%	Vo nom +2.5%	Vo nom +5%
WDD20-03SX	1KΩ	0Ω	10KΩ	4.7KΩ
Type	Vo nom -5%	Vo nom -10%	Vo nom +5%	Vo nom +10%
WDD20-05SX	4.7KΩ	100Ω	4.7KΩ	470Ω
WDD20-12SX	30KΩ	20KΩ	10KΩ	2KΩ
WDD20-15SX	150KΩ	56KΩ	15KΩ	3KΩ
WDD20-12DX	120KΩ	56KΩ	12KΩ	2KΩ
WDD20-15DX	180KΩ	75KΩ	10KΩ	1.2KΩ