



PINGWEI ENTERPRISE

# 1F1 THRU 1F7

## 1.0AMP . FAST RECOVERY RECTIFIERS


### FEATURE

- . Fast switching
- . High current capability
- . Low forward voltage drop
- . Low power loss, high efficiency
- . High surge capability
- . High temperature soldering guaranteed  
260°C /10sec/ 0.375" lead length at 5 lbs tension
- .  $\Phi 0.6$ mm leads

### MECHANICAL DATA

- . Terminal: Plated axial leads solderable per MIL-STD 202E, method 208C
- . Case: Molded with UL-94 Class V-0 recognized Flame Retardant Epoxy
- . Polarity: color band denotes cathode
- . Mounting position: any

### R-1

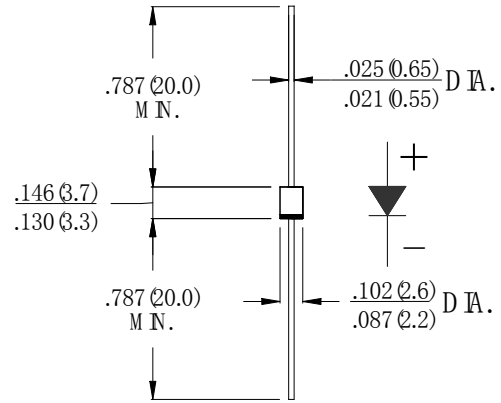

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

Type Number	SYMBOL	1F1	1F2	1F3	1F4	1F5	1F6	1F7	units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current .375"(9.5mm) lead length at $T_A = 55^\circ C$	$I_{F(AV)}$	1.0							A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30.0							A
Maximum Instantaneous forward Voltage at 1.0A DC	$V_F$	1.3							V
Maximum DC Reverse Current @ $T_A = 25^\circ C$ at rated DC blocking voltage @ $T_A = 100^\circ C$	$I_R$	5.0 100.0							$\mu A$
Maximum Reverse Recovery Time (Note 1)	$t_{rr}$	150			250		500		ns
Typical Junction Capacitance (Note 2)	$C_J$	15							pF
Typical Thermal Resistance (Note 3)	$R_{(JA)}$	75							$^\circ C/W$
Storage Temperature	$T_{STG}$	-55 to +150							$^\circ C$
Operation Junction Temperature	$T_J$	-55 to +150							$^\circ C$

### Note:

1. Test Conditions:  $I_F = 0.5A$ ,  $I_R = 1.0A$ ,  $I_{RR} = 0.25A$
2. Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc
3. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, vertical P.C. Board Mounted.