



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MBRD520 THRU MBRD5100

Features

- € Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Low Forward Voltage Drop
- High Current Capability ,High Efficiency
- Low Power Loss
- € Marking : type number

Maximum Ratings

- Operating Temperature: -65°C to +125°C
- Storage Temperature: -65 °C to +150°C

MCC Catalog Number	Maximum Reccurent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBRD520	20V	14V	20V
MBRD530	30V	21V	30V
MBRD540	40V	28V	40V
MBRD550	50V	35V	50V
MBRD560	60V	42V	60V
MBRD580	80V	56V	80V
MBRD5100	100V	70V	100V



Electrical Characteristics @ 25°C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	5A	$T_C = 75^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	150A	8.3ms, half sine
Maximum Instantaneous Forward Voltage MBRD520-40 MBRD550-60 MBRD580-100	V_F	.65V .75V .85V	$I_{FM} = 5A;$ $T_J = 25^\circ\text{C}$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	1.0mA 25mA	$T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$

*Pulse Test: Pulse Width 300µsec, Duty Cycle 1%

5.0 Amp Schottky Barrier Rectifier 20 to 100 Volts

DPAK



DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.220	0.245	5.60	6.22
B	0.244	0.265	6.20	6.73
C	0.085	0.104	2.15	2.65
D	0.018	0.026	0.46	0.66
E	0.017	0.023	0.42	0.58
H	0.035	0.050	0.88	1.27
J	0.017	0.023	0.42	0.58
K	0.354	0.403	9.00	10.24
L	0.084	0.088	2.14	2.24
R	0.205	0.215	5.21	5.46
U	0.039		1.00	

**RATING AND CHARACTERISTIC CURVES
MBRD520 thru MBRD5100**

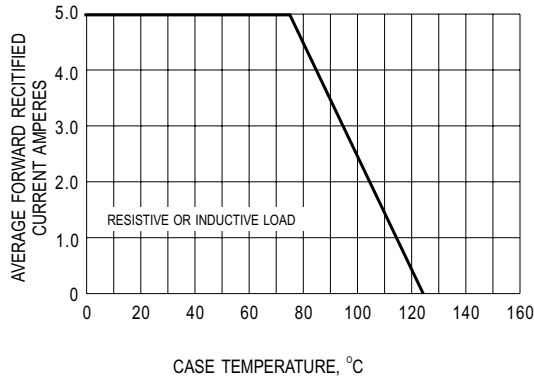


Fig.1- FORWARD CURRENT DERATING CURVE

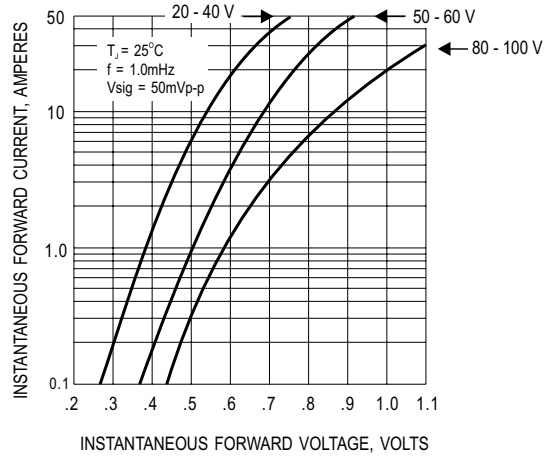


Fig.2- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTIC

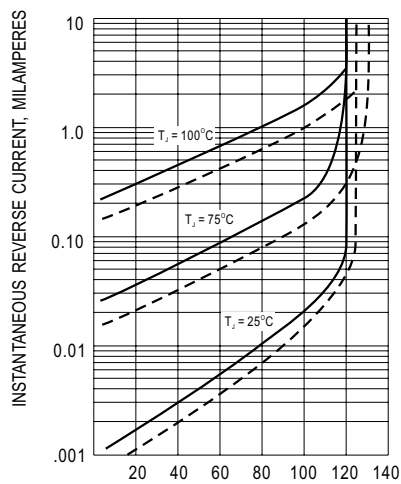


Fig.3- TYPICAL REVERSE CHARACTERISTIC

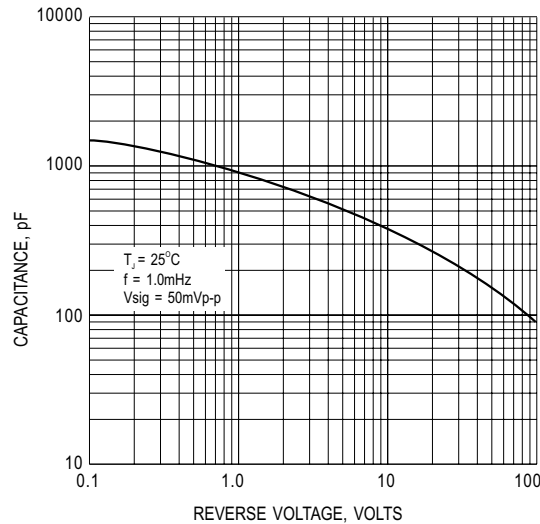


Fig.4- TYPICAL JUNCTION CAPACITANCE

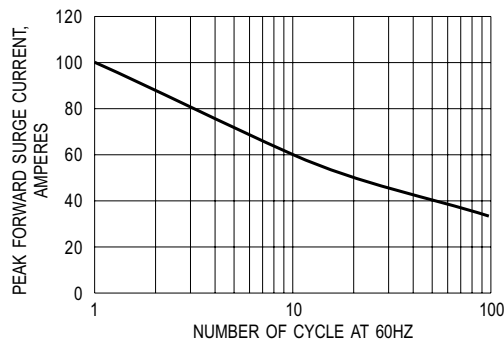


Fig.5- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT



™

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.