

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free


## FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- High speed switching

## PACKAGING INFORMATION

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.34 grams (approximately)

### DO-41

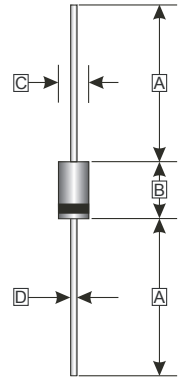

REF.	Millimeter	
	Min.	Max.
A	25.4 (TYP)	
B	4.10	5.21
C	2.00	2.72
D	0.70	0.90

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

$T_{AMB} = 25^{\circ}\text{C}$  ambient temperature unless otherwise specified.  
Single phase half-wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

PARAMETERS	SYMBOL	PART NUMBERS							UNITS	TESTING CONDITIONS
		HER 101	HER 102	HER 103	HER 104	HER 105	HER 106	HER 107		
Recurrent Reverse Voltage (Max.)	$V_{RRM}$	50	100	200	400	600	800	1000	V	
RMS Voltage (Max.)	$V_{RMS}$	35	70	140	280	420	560	700	V	
DC Blocking Voltage (Max.)	$V_{DC}$	50	100	200	400	600	800	1000	V	
Instantaneous Forward Voltage (Max.)	$V_F$	1.00		1.30	1.70			V	$I_F = 1\text{A}$	
Average Forward Rectified Current (Max.)	$I_O$	1.0							A	0.375" (9.5mm) lead length @ $T_A = 55^{\circ}\text{C}$
Peak Forward Surge Current	$I_{FSM}$	30							A	8.3 ms single half sine-wave superimposed on rated load (JEDEC method)
DC Reverse Current (Max.)	$I_R$	5.0							$\mu\text{A}$	$V_R = V_{DC}, T_A = 25^{\circ}\text{C}$
		150								$V_R = V_{DC}, T_A = 100^{\circ}\text{C}$
Reverse Recovery Time (Max.)	$T_{RR}$	50			70				nS	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{RR} = 0.25\text{A}$
Junction Capacitance (Typ.)	$C_J$	20			15				pF	f=1MHz and applied 4V DC reverse voltage
Storage Temperature Range	$T_{STG}$	-65 ~ 150							$^{\circ}\text{C}$	

**RATINGS AND CHARACTERISTIC CURVES (HER101 THRU HER107)**

FIG.1-TYPICAL FORWARD CHARACTERISTICS

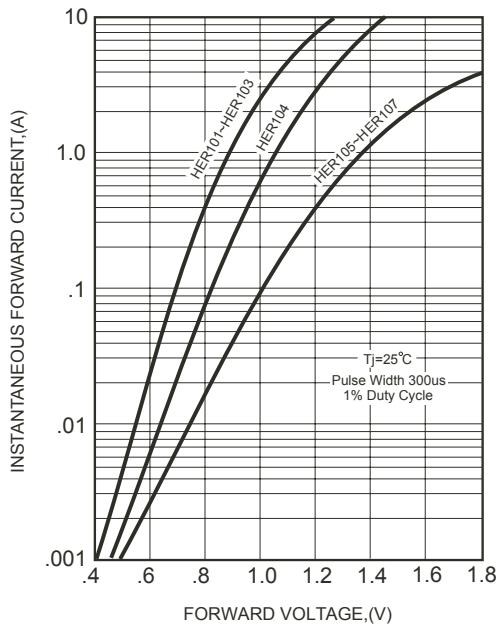


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE


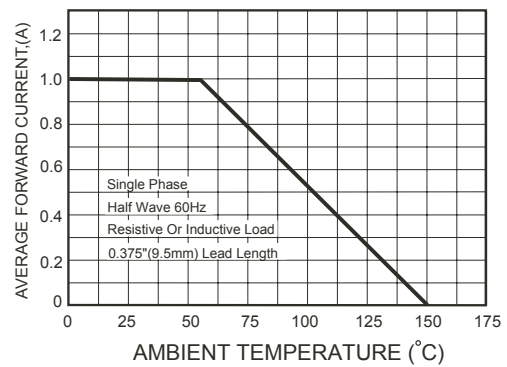


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

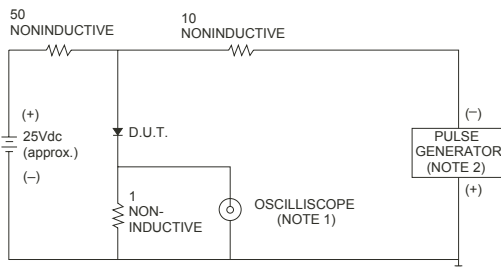

NOTES: 1. Rise Time = 7ns max., Input Impedance = 1 megohm, 22pF.

2. Rise Time = 10ns max., Source Impedance = 50 ohms.

FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

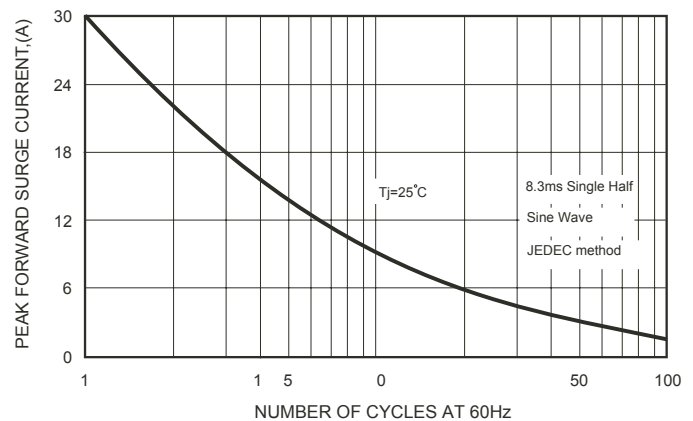


FIG.5-TYPICAL JUNCTION CAPACITANCE

