



# DSR0.3A THRU DSR0.3M

## Surface Mount Standard Rectifiers

Reverse Voltage - 50 to 1000 Volts Forward Current - 0.3 Ampere


### Features

- ◆ Low profile space
- ◆ Ideal for automated placement
- ◆ Glass passivated chip junctions
- ◆ Low forward voltage drop
- ◆ Low leakage current
- ◆ High forward surge capability
- ◆ High temperature soldering:  
260°C/10 seconds at terminals
- ◆ Component in accordance to  
RoHS 2002/95/1 and WEEE 2002/96/EC

### Mechanical Data

**Case:** JEDEC SOD-123FL molded plastic body over glass passivated chip  
**Terminals:** Solder plated, solderable per J-STD-002B and JESD22-B102D  
**Polarity:** Laser band denotes cathode end  
**Weight:** 0.017gram

### SOD-123FL

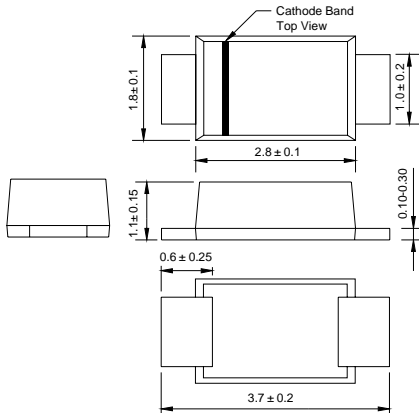

Dimensions in millimeters

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.  
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	S03A	S03B	S03D	S03G	S03J	S03K	S03M	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current at $T_A=65^\circ\text{C}$ (NOTE 1)	$I_{(AV)}$	0.3							Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) $T_L=25^\circ\text{C}$	$I_{FSM}$	15.0							Amps
Maximum instantaneous forward voltage at 0.3A	$V_F$	1.1							Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$	5.0 50.0							$\mu\text{A}$
Typical junction capacitance (NOTE 2)	$C_J$	4							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	220							$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-55 to +150							$^\circ\text{C}$

Note1: Mounted on FR-4 P.C.B. With 0.9x1.5 mm copper pad areas ( $\approx 35 \mu\text{m}$  thick)



www.microdiode.com

# RATINGS AND CHARACTERISTIC CURVES DSR0.3A THRU DSR0.3M

## Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

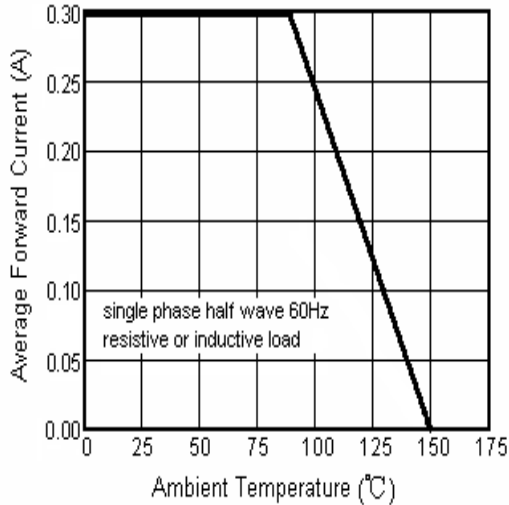


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

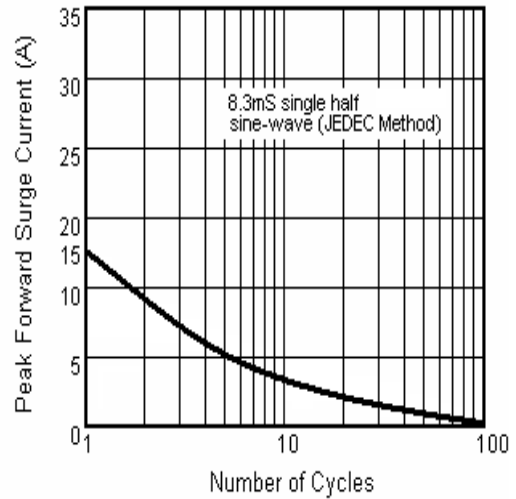


Fig.3 Typical Instantaneous Forward Characteristics


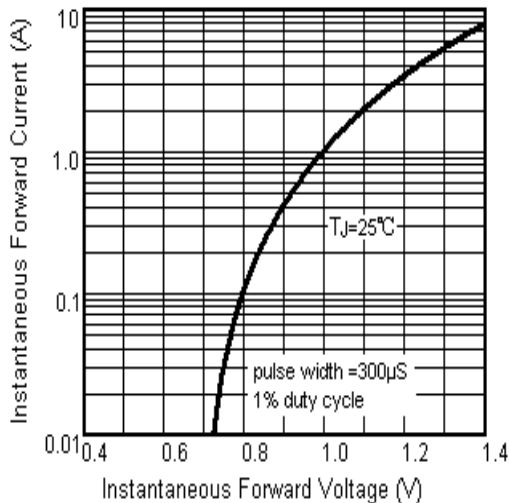


Fig.4 Typical Reverse Characteristics



The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

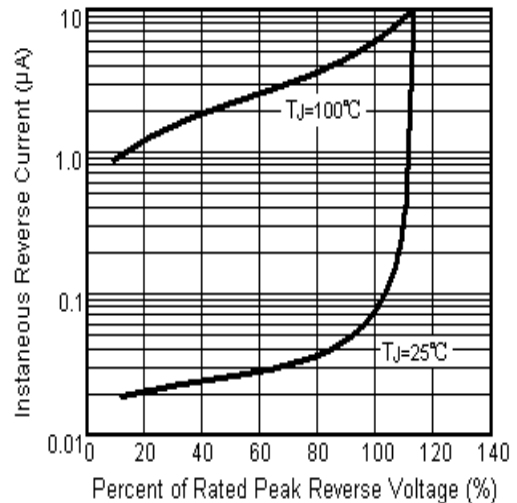

www.microdiode.com