

1.5KE SERIES

GLASS PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR




**CHENG-YI
ELECTRONIC**



VOLTAGE 6.8 to 440 VOLTS
1500 WATT PEAK POWER
5.0 WATTS STEADY STATE

DO-201AE

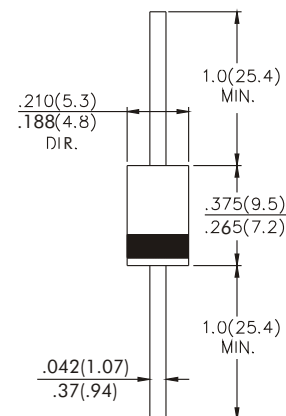

Dimensions in inches and (millimeters)

FEATURES

- Plastic package has Underwrites Laboratory Flammability Classification 94V-0
- Glass passivated chip junction in Molded Plastic package
- 1500W surge capability at 1 ms
- Excellent clamping capability
- Low zener impedance
- Fast response time: typically less than 1.0 ps from 0 volts to BV min.
- Typical IR less than 1 μ A above 10V
- High temperature soldering guaranteed: 260°C/10 seconds $\frac{.375"}{.265}$, (9.5mm) lead length/51bs., (2.3kg) tension

MECHANICAL DATA

- Case: JEDEC DO-201AE Molded plastic
- Terminals: Axial leads, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode except Bipolar
- Mounting Position: Any
- Weight: 0.045 ounce, 1.2 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

RATINGS	SYMBOL	VALUE	UNITS
Peak Pulse Power Dissipation at TA=25°C, TP=1ms (NOTE 1)	P _{PK}	Minimum 15000	Watts
Steady Power Dissipation at TL=75°C Lead Lengths $\frac{.375"}{.265}$, (9.5mm) (NOTE 2)	P _D	5.0	Watts
Peak Forward Surge Current 8.3ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method) (NOTE 3)	I _{FSM}	200	Amps
Operating Junction and Storage Temperature Range	T _J , T _{STG}	-65 to + 175	°C

- Notes: 1. Non-repetitive current pulse, per Fig.3 and derated above TA=25°C per Fig.2
2. Mounted on Copper Leaf area of 0.79 in (40mm²)
3. 8.3mm single half sine-wave, duty cycle=4 pulses minutes maximum.

1.5KE SERIES

GLASS PASSIVATED JUNCTION TRANSIENT VOLTAGE SUPPRESSOR



**CHENG-YI
ELECTRONIC**

RATING AND CHARACTERISTICS CURVES 1.5KE SERIES

Fig. 1 - PEAK PULSE POWER RATING CURVE

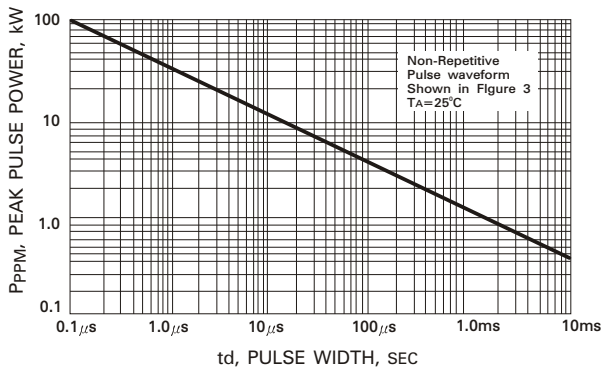


Fig. 2 - PULSE DERATING CURVE

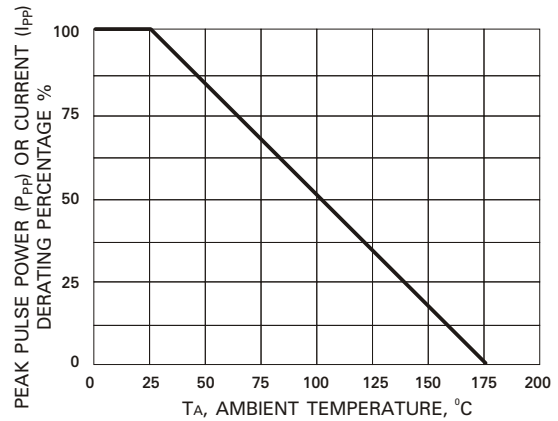


Fig. 3 - PULSE WAVEFORM

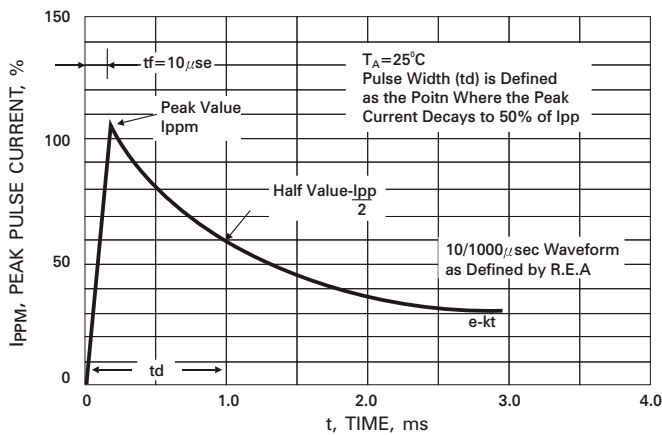


Fig. 4 - TYPICAL CAPACITANCE VS STAND-OFF VOLTAGE

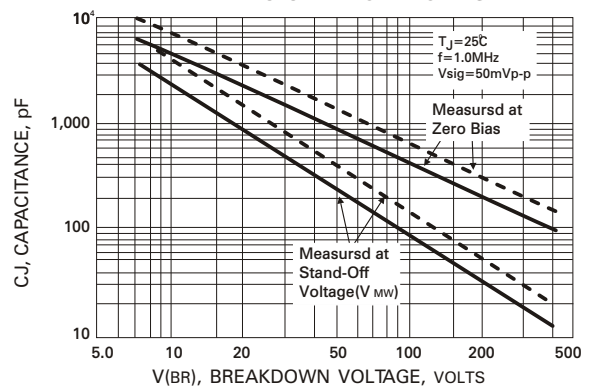


Fig. 5 - STEADY STATE POWER DERATING CURVE

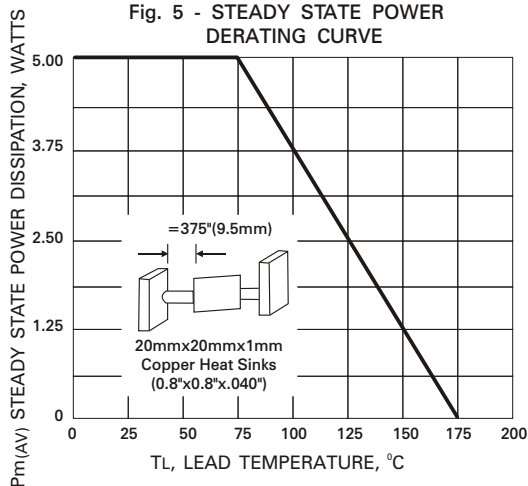


Fig. 6 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

