

6

5








4

3

2

1




### CABLE SPECIFICATIONS

DESCRIPTION	COLOR CODE	NOMINAL O.D.	OVERALL RATING	COLOR	APPROVAL
3x1.0mm <sup>2</sup> H05VV-F	INT'L	7.1	10A 250V	BLACK	      

#### NOTES:

1. Cord set is supplied with a 13A fuse

**RoHS  
COMPLIANT**

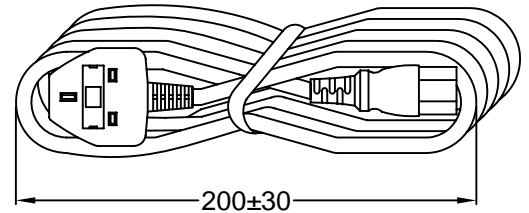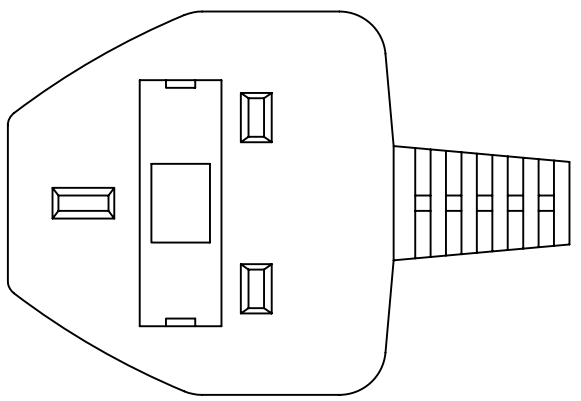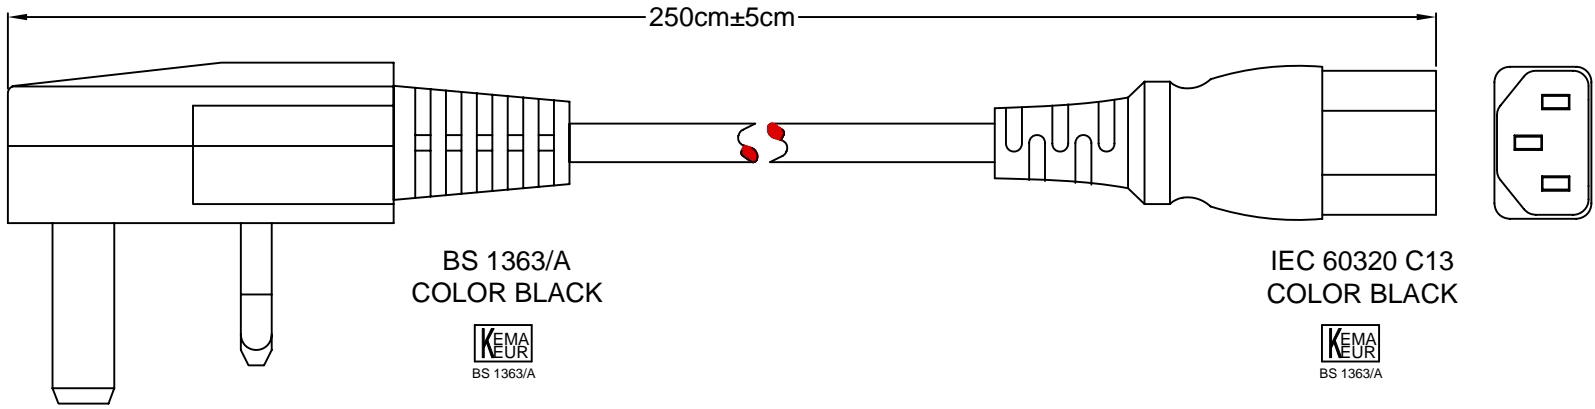

HANKING DETAIL

REV	DATE	CHANGE	CHNG		CHKD		APPR	
			SS	TD	PB	PJ		
A	4/89	CHANGED PLUG	SS	TD	PB	PJ	SS	
B	3/14/00	UPDATED DRAWING	PB	TD	PB	JJ	SS	
C	4/20/00	ADDED PACKING SPEC.	PB	TD	PB	JJ	SS	
D	5/25/00	ADD HANKING SPEC.	TD	JJ	PB	TD	JJ	
E	11/14/00	UPDATED APPROVALS	PB	TD	PB	JJ	PB	
F	12/10/01	REVISED / UPDATED	GQ	PB	PB	JJ	PB	
G	8/3/07	UPDATED APPROVALS	PB					

TOLERANCE IN MM UNLESS OTHERWISE SPECIFIED > 1000 ± 50 ≤ 1000 ± 30 STRIPPED LENGTH ± 2		<b>Power Dynamics, Inc.</b> Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076	
DRAWN BY: AH CHECK BY: TD APPR BY: PJ		DATE: 8/25/98 DATE: 4/20/99 DATE: 4/20/99	
PART: BRITISH FUSED CORD SET 250cm LONG BS 1363 TO IEC 60320 C13, 13A FUSE		<b>14012</b> PART #:	
SIZE: A SCALE: NTS		ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	
SHEET 1 of 1 REV: G			