

Reducing adapter - REDUC-K-KV-M25/M20 BK - 1411232

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Reducing adapter, plastic, M25 to M20, including O-ring



Key Commercial Data

Packing unit	1 STK
Minimum order quantity	10 STK
Custom tariff number	39269097
Country of origin	Germany

Technical data

Dimensions

Length	14 mm
Length without connecting thread	6 mm
Connecting thread diameter	25 mm
Length of the connecting thread	8 mm

Ambient conditions

Degree of protection	IP65 (Depends on the screw connection used)
Ambient temperature (operation)	-30 °C ... 100 °C

General

Material	Polyamide fiberglass reinforced
Seal material	CR
Outer thread	M25
Internal thread	M20
Flammability rating according to UL 94	HB

Reducing adapter - REDUC-K-KV-M25/M20 BK - 1411232


Technical data

Standards and Regulations

Flammability rating according to UL 94	HB
--	----

Drawings

Dimensional drawing

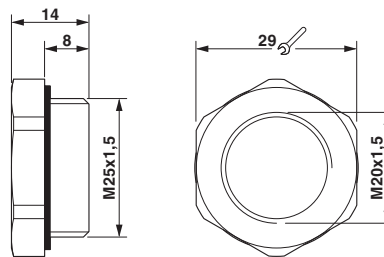

Dimensional drawing

Classifications

eCl@ss

eCl@ss 5.1	27149109
eCl@ss 6.0	27149109
eCl@ss 8.0	27379201
eCl@ss 9.0	27379201

ETIM

ETIM 4.0	EC002498
ETIM 5.0	EC002498