


1N4001S thru 1N4008S

General Purpose Plastic Rectifiers

Reverse Voltage 50 to 1200V Forward Current 1.0A

Feature

- * Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- * Construction utilizes void-free molded plastic technique
- * Low reverse leakage
- * High forward surge capability
- * Diffused junction
- * High temperature soldering guaranteed:
260°C/10 seconds
- * 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

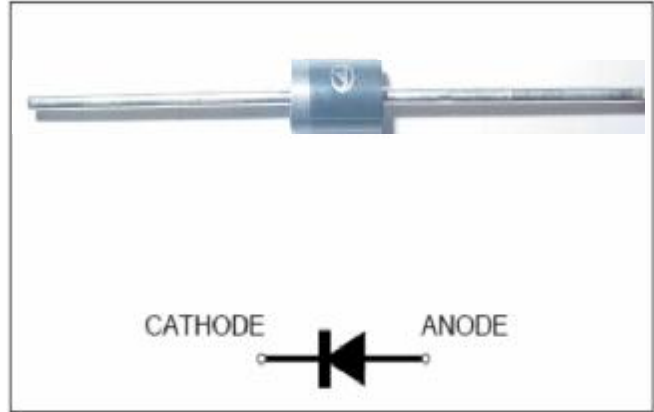

Mechanical Data

Case: JEDEC A - 405, molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.0084 oz., 0.214 g

Handling precaution: None

1. Maximum & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter Symbol | symbol | 1N 4001S | 1N 4002S | 1N 4003S | 1N 4004S | 1N 4005S | 1N 4006S | 1N 4007S | 1N 4008S | Unit |
|---|-----------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------|
| Marking spec | | 1N 4001S | 1N 4002S | 1N 4003S | 1N 4004S | 1N 4005S | 1N 4006S | 1N 4007S | 1N 4008S | |
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | 1200 | V |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | 840 | V |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | 1200 | V |
| Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A = 75^\circ\text{C}$ | $I_{F(AV)}$ | 1.0 | | | | | | | | A |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I_{FSM} | 30 | | | | | | | | A |
| Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead lengths at $T_A = 75^\circ\text{C}$ | $I_{R(AV)}$ | 30 | | | | | | | | μA |
| Typical thermal resistance (Note 1) | $R_{\theta JA}$ | 50 | | | | | | | | $^\circ\text{C/W}$ |
| Operating junction and storage temperature range | T_J, T_{STG} | -50 to +150 | | | | | | | | $^\circ\text{C}$ |

Electrical Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter Symbol | symbol | 1N 4001S | 1N 4002S | 1N 4003S | 1N 4004S | 1N 4005S | 1N 4006S | 1N 4007S | 1N 4008S | Unit |
|---|--------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|---------------|
| Maximum instantaneous forward voltage at 1.0A | V_F | 1.10 | | | | | | | | V |
| Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A = 100^\circ\text{C}$ | I_R | 5.0 | | | | | | | | μA |
| Typical junction capacitance at 4.0V, 1MHz | C_J | 15 | | | | | | | | PF |

NOTES:

1. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

1N4001S thru 1N4008S

2. Characteristic Curves (TA = 25°C unless otherwise noted)

Fig. 1 - Forward Current Derating Curve

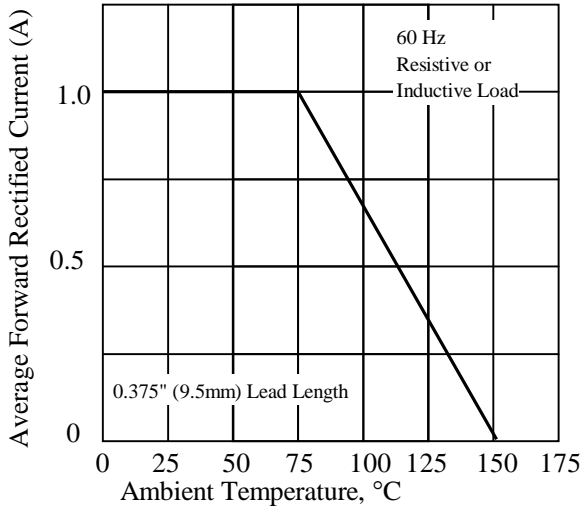


Fig. 2 - Maximum Non-repetitive Peak Forward Surge Current

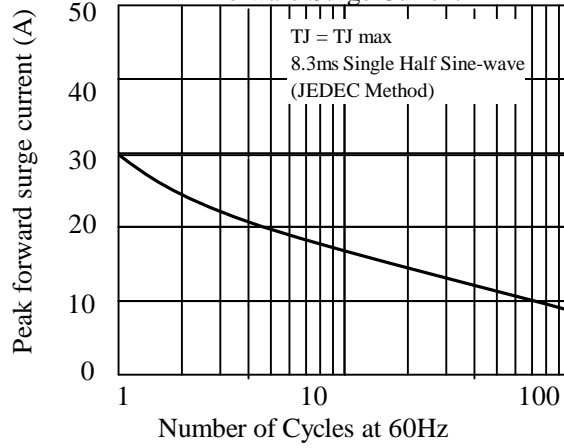


Fig. 3 - Typical Instantaneous Forward Characteristics

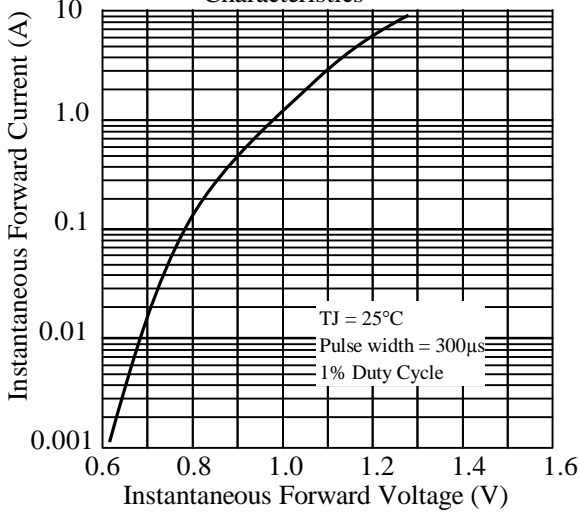


Fig. 4 - Typical Reverse Characteristics

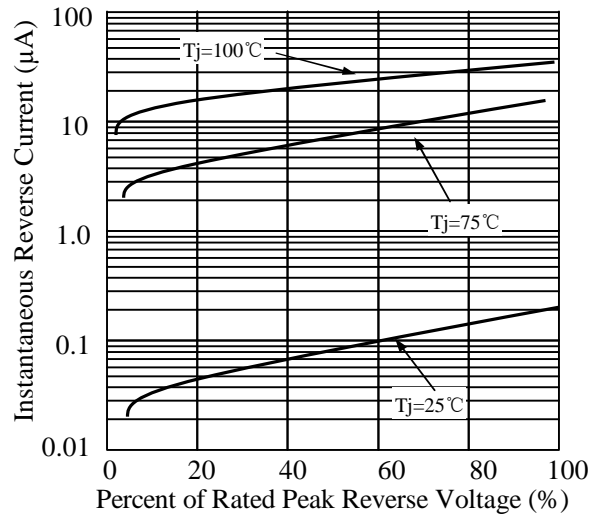


Fig. 5 - typical transient thermal impedance



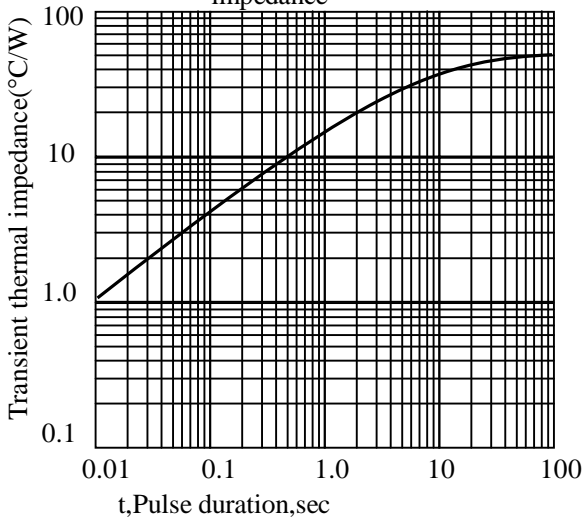


Fig. 6 - Typical Junction Capacitance

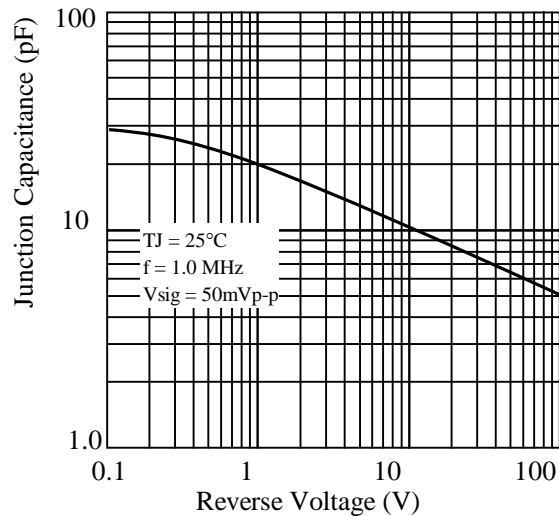


1N4001S thru 1N4008S

3. dimension:

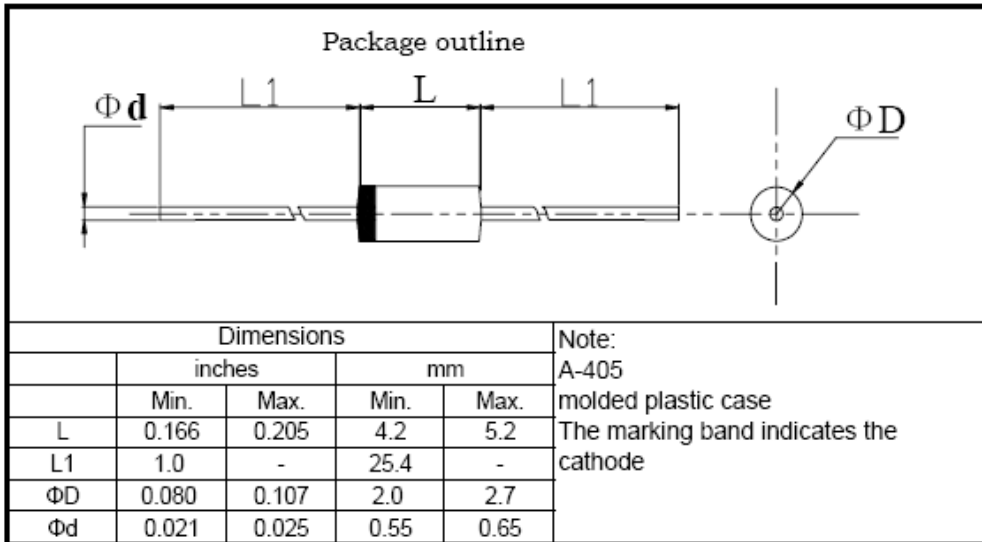

| | |
|---------------------------------|---------------|
| 标题： 塑封生产线轴向产品包装规范 | 文件编号： WI-250 |
| | 第 4 版 第 0 次修改 |
| | 第 1 页 |


- 1 弹带盒装 ammo and box
- 1.1. 弹带盒规格 ammo spec.

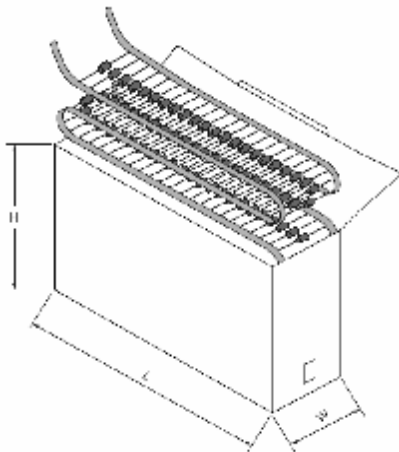

单位：mm

| | L | W | H |
|-----|-------|------|------|
| T52 | 262±2 | 76±2 | 90±2 |
| T42 | 262±2 | 64±2 | 90±2 |
| T26 | 250±3 | 45±3 | 95±3 |

- 1.2 弹带内盒要求 inner box spec.

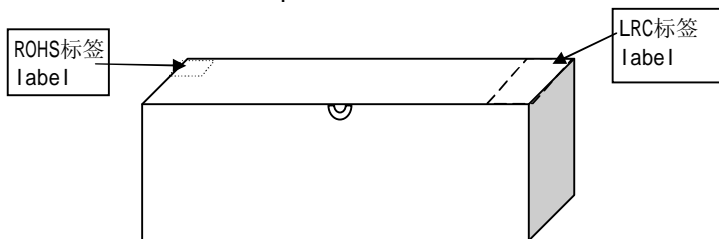

| | |
|-----------------------------|---------------|
| 标题: 塑封生产线轴向产品包装规范 | 文件编号: WI-250 |
| | 第 4 版 第 0 次修改 |
| | 第 2 页 |

1.4 标签要求 label spec.

1.4.1 LRC标签 LRC label

成型 FORMING ***** ← 成型规格 forming spec.


型号 TYPE ***** ← LRC产品型号 type

| | | |
|--------------------------------|-------|-----------------------------------|
| 重复峰压 (V) PRV (V) | **** | ← 产品重复峰压值 peak repetitive voltage |
| 额定电流 (A) I _o (A) | ** | ← 产品额定电流值 average output current |
| 数量 (只) QTY (pcs) | **** | ← 产品数量 quantity |
| 检验员 CHECKER | 02 | |
| 日期: DATE: | ***** | ← 产品生产日期 date |

1.4.2 环保标签 environmental protection label



2. 外箱规格 carton spec.

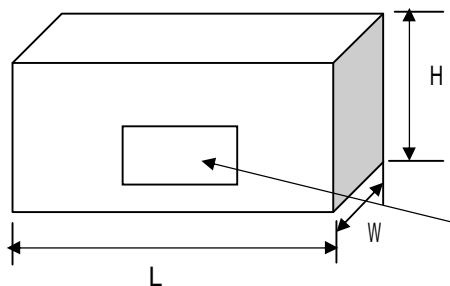

单位: mm

| | L | W | H |
|-----|-------|-------|-------|
| T52 | 430±2 | 280±2 | 225±2 |
| T42 | 410±2 | 285±2 | 300±2 |
| T26 | 435±3 | 280±3 | 295±3 |


外箱标签 carton label

3 按以上包装方式, 编带数量和外包装箱产品数量: typing and carton spec.

| | 塑封外型 | | | |
|----------------------------------|---------------------|-------|----------------------|----------|
| | A-405 & DO-41 & R-1 | R-3 | DO-15 | DO-201AD |
| 每根编带数量 quantity/ammo | 3K | 1.8K | 2K(T52) 1.8K(T26) | 0.8K |
| 外箱数量 (T52编带) quantity/cartoon | 30K | 18K | 20K | 8.0K |
| 外箱数量 (T26编带) quantity/cartoon | 60K | 36K | 36K | - |
| 外箱数量 (T42编带) quantity/cartoon | 54K | 32.4K | 36K | - |

| | |
|-----------------------------|---------------|
| 标题： 塑封生产线轴向产品包装规范 | 文件编号：WI-250 |
| | 第 4 版 第 0 次修改 |
| | 第 3 页 |

4 编带规格 brede spec

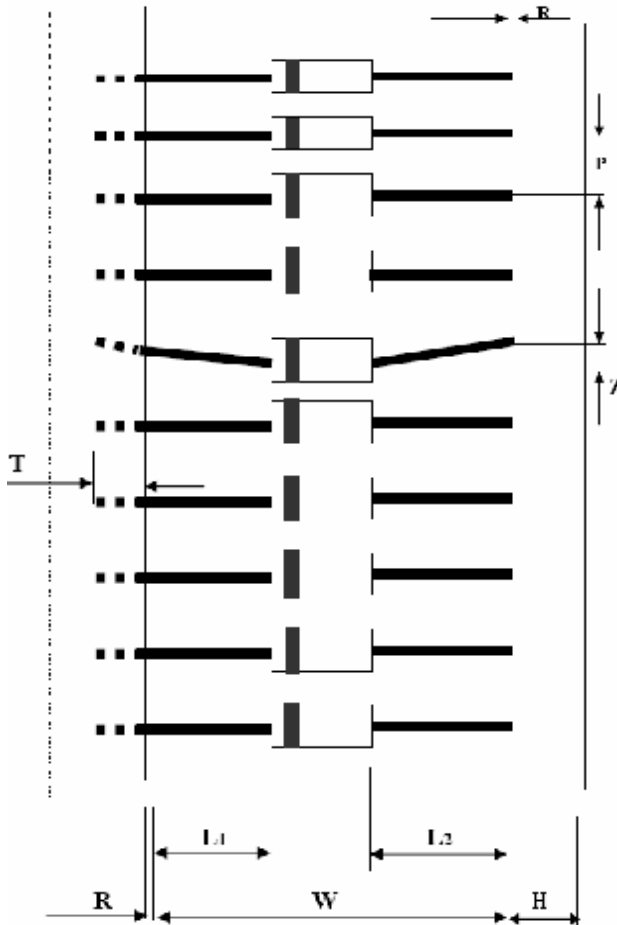

| 尺寸代号 | 编带尺寸 typing dimension | | | | | |
|--------------|-----------------------|--------------|--------------|--------------|--------------|--------------|
| | 26/tape | 35/tape | 40/tape | 42/tape | 52/tape | 52/tape# |
| W | 26 0.0/+1.6 | 35 -1.0/+0.5 | 40 -1.0/+0.5 | 42 -1.0/+1.0 | 52 -1.0/+2.0 | 52 -1.0/+2.0 |
| P | 5±0.5 | 5±0.5 | 5±0.5 | 5±0.5 | 5±0.5 | 10±0.5 |
| L1-L2 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| H | 6±1.0 | 6±1.0 | 6±1.0 | 6±1.0 | 6±1.0 | 6±1.0 |
| Z | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| R | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 | <1.0 |
| T | >3.5 | >3.5 | >3.5 | >3.5 | >3.5 | >3.5 |

注：52编带# 为DO-201AD编带规格 "52编带#" just for D0-201AD

1. 红白编带厚度为0.05mm；两种胶带各自之间无明显色差；编带要求均为胶带。
The typing thickness is 0.05mm and color is obvious difference
2. 两端引带20~40cm. Typing lead over 20~40cm
3. 红色编带一端为二极管“负极”；白色编带一端为二极管“正极”。
red color is cathode ,white color is anode
4. 无卤 green epoxy compound (无卤产品才贴HF only)

Green

1N4001S thru 1N4008S

4. Update Record

| 版次 | 更新记录 | 更新作者 | 更新日期 |
|----|--------------------|------|------------|
| 1 | 第一版 | 周杰 | 2010-6-29 |
| 2 | 将1N4007HS更名为1N4008 | 周杰 | 2012.08.02 |