

FAST RECOVERY RECTIFIER

<p>FEATURES</p> <ul style="list-style-type: none"> • Low cost construction • Fast switching for high efficiency. • Low reverse leakage • High forward surge current capability • High temperature soldering guaranteed: 260°C/10 seconds/0.375" (9.5mm) lead length at 5 lbs (2,3kg) tension <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> • Case: Transfer molded plastic • Epoxy: UL94V-0 rate flame retardant • Polarity: Color band denotes cathode end • Lead: Plated axial lead ,solderable per MIL-STD-202E method 208C • Mounting position: Any • Weight: 0.012 ounce, 0.33 gram 	<p>VOLTAGE RANGE 50 to 600 Volts CURRENT 1.0 Ampere</p> <p style="text-align: right;">DO-41</p> <p style="text-align: center;">Dimensions in inches and (millimeters)</p>						
<p>MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</p> <p>Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load derate current by 20%.</p>							
	SYMBOLS	1N4933	1N4934	1N4935	1N4936	1N4937	UNITS
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	Volts
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	Volts
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	Volts
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at T _A =75°C	I _(AV)	1.0					Amp
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30					Amps
Maximum Instantaneous Forward Voltage at 1.0A	V _F	1.2					Volts
Maximum DC Reverse Current at rated DC blocking voltage	T _A =25°C	5.0					μAmps
	T _A =100°C	100					
Maximum Reverse Recovery Time(NOTE3) T _j =25°C	t _{rr}	200					nS
Maximum Reverse Recovery Current(NOTE 3)	I _{RM(REC)}	2.0					Amps
Typical Junction Capacitance(NOTE1)	C _J	15					pF
Typical Thermal Resistance(NOTE2)	R _{θJA}	50					°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150					°C
<p>NOTES:</p> <ol style="list-style-type: none"> 1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts. 2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, P.C. board mounted. 3. Reverse Recovery Test Conditions: I_F=1.0A, V_R=30V, di/dt=50A/μs, I_{rr}=10% I_{RM} for measurement of t_{rr}. 							

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

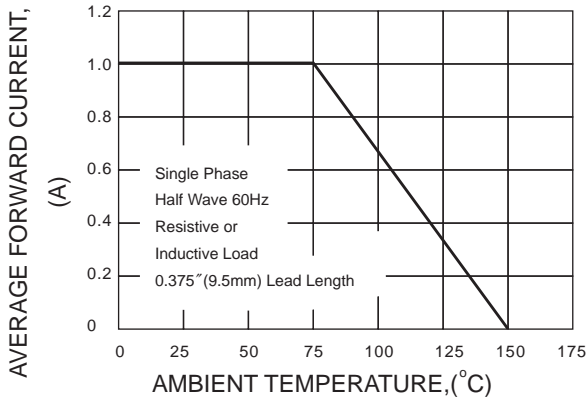


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

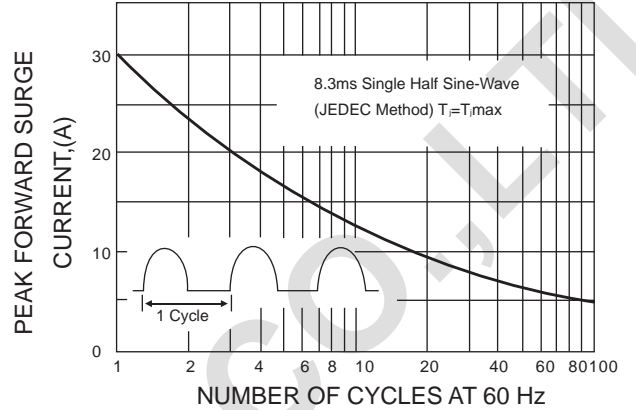


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

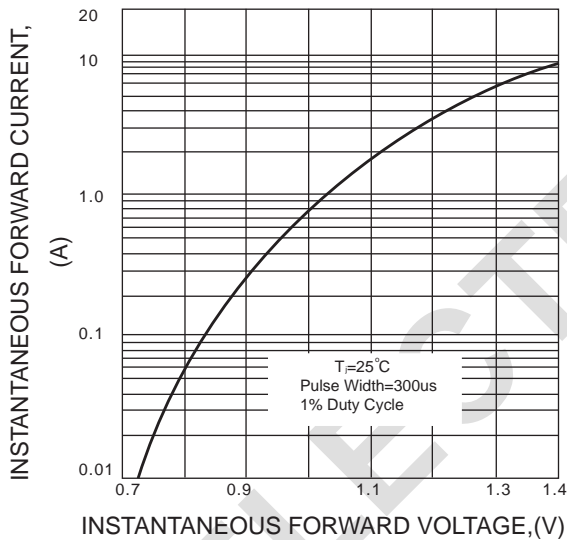


FIG.4-TYPICAL REVERSE CHARACTERISTICS

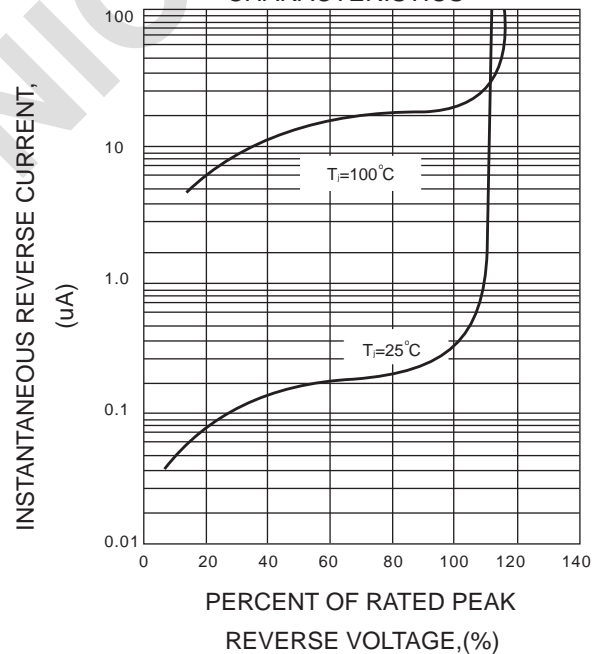


FIG.5-TYPICAL JUNCTION CAPACITANCE

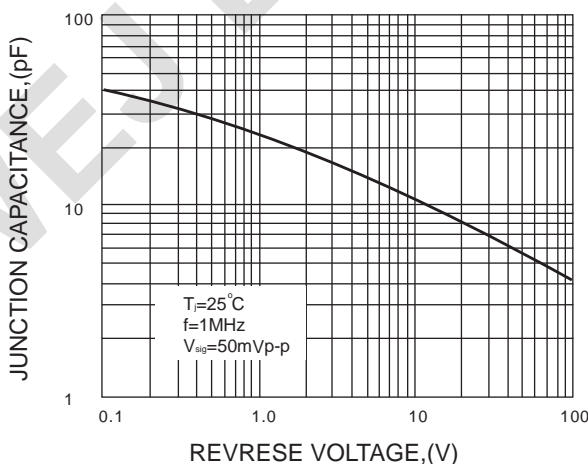


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

