



1N5817HS thru 1N5819HS

Surface Mount Schottky Barrier Rectifier


Features

- Reverse Voltage - 20 to 40 V
- Forward Current - 1 A

SOD-323HE



1Cathode 2Anode



Marking : 1N5817HS:SK

1N5818HS-1N5819HS:SL

Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	1N5817HS	1N5818HS	1N5819HS	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	V
Maximum RMS Voltage	V_{RMS}	14	21	28	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1			A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load(JEDEC methode)	I_{FSM}	25			A
Maximum Instantaneous Forward Voltage at $I_F = 1 A$ at $I_F = 3 A$	V_F	0.45 0.75	0.55 0.875	0.6 0.9	V
Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage ¹⁾	I_R	0.5 10			mA
Typical Junction Capacitance ²⁾	C_J	110			pF
Typical Thermal Resistance, Junction to Ambient ³⁾	$R_{\theta JA}$	75			°C/W
Operating Junction Temperature Range	T_J	- 55 to + 125			°C
Storage Temperature Range	T_{STG}	- 55 to + 150			°C

Note:

- 1、 Pulse test: 300 μs pulse width, 1% duty cycle
- 2、 Mearsured at 1 MHz and reverse voltage of 4 V
- 3、 Thermal resistance junction to ambient 0.24" X 0.24"(6 X 6 mm) copper pads to each terminals



1N5817HS thru 1N5819HS

Surface Mount Schottky Barrier Rectifier

Rating And Characteristics Curves

FIG.1-FORWARD CURRENT DERATING CURVE

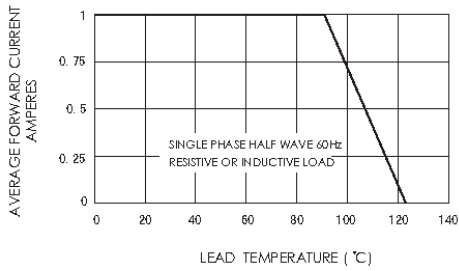


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

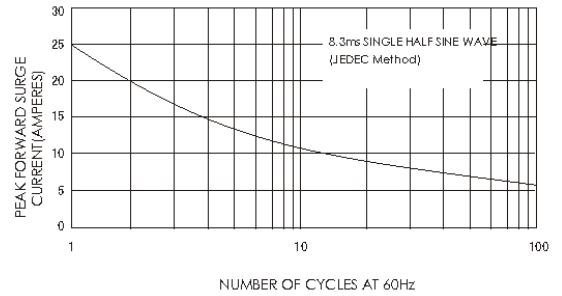


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

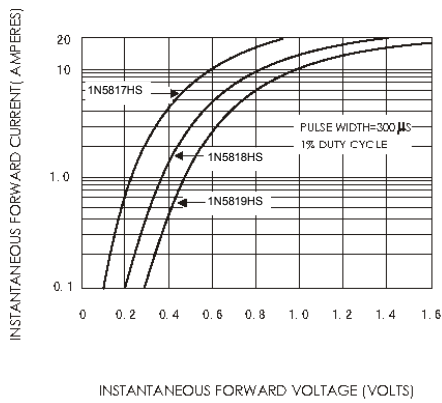


FIG.4-TYPICAL REVERSE CHARACTERISTICS


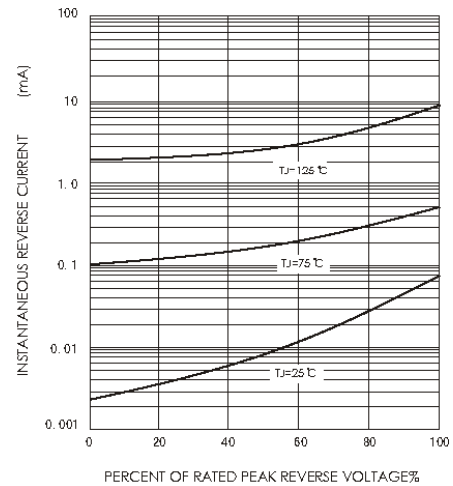


FIG.5-TYPICAL JUNCTION CAPACITANCE



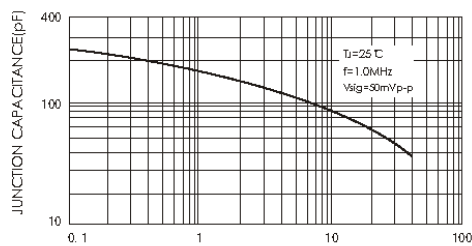


1N5817HS thru 1N5819HS

Surface Mount Schottky Barrier Rectifier


Package Outline

SOD-323HE

Dimensions in millimeters

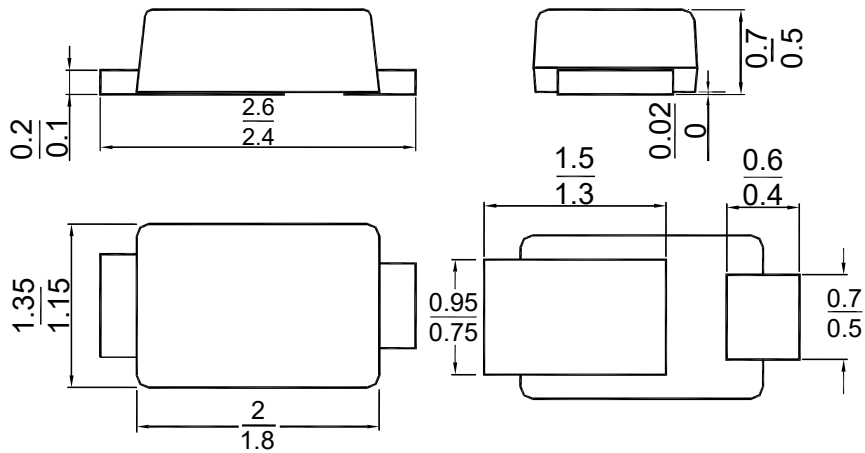

Recommended Soldering Footprint

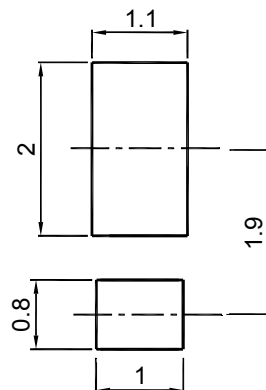

Ordering Information

Device	Package	Shipping
1N5817HS thru 1N5819HS	SOD-323HE	3000/Tape&Reel (7 inches)