


1N5817WS-1N5819WS

■ Features

- For use in low voltage, high frequency inverters
- Free wheeling, and polarity protection applications.

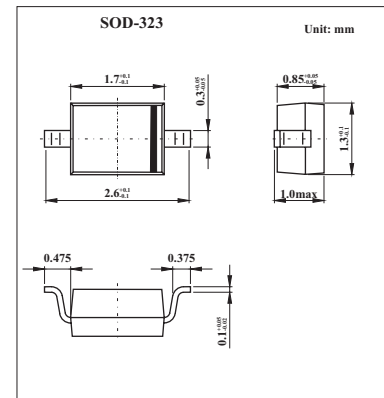

■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	1N5817WS	1N5818WS	1N5819WS	Unit
Non-Repetitive Peak reverse voltage	V _{RM}	20	30	40	V
Peak repetitive Peak reverse voltage	V _{RRM}				
Working Peak Reverse Voltage	V _{RWM}	20	30	40	V
DC Blocking Voltage	V _R				
RMS Reverse Voltage	V _{R(RMS)}	14	21	28	V
Average Rectified Output Current	I _O	1			A
Peak forward surge current @=8.3ms	I _{FSM}	25			A
Repetitive Peak Forward Current	I _{FRM}	625			mA
Power Dissipation	P _d	250			mW
Thermal Resistance Junction to Ambient	R _{θJA}	500			K/W
Storage temperature	T _{STG}	-65 to 150			°C

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit	
Reverse breakdown voltage	V _(BR)	I _R = 1mA	1N5817WS	20			V
			1N5818WS	30			
			1N5819WS	40			
Reverse voltage leakage current	I _R	V _R =20V V _R =30V V _R =40V	1N5817WS			1	mA
			1N5818WS				
			1N5819WS				
Forward voltage	V _F	I _F =1A	1N5817WS			0.45	V
			1N5818WS			0.75	V
		I _F =3A	1N5818WS			0.55	V
			1N5819WS			0.875	V
		I _F =1A	1N5818WS			0.6	V
			1N5819WS			0.9	V
Diode capacitance	C _D	V _R =4V, f=1MHz			120	pF	

■ Marking

NO.	1N5817WS	1N5818WS	1N5819WS
Marking	SJ	SK	SL



1N5817WS-1N5819WS

■ Typical Characteristics

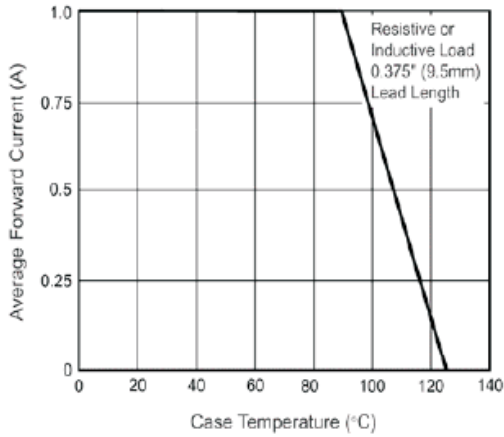


Fig.1 Forward Current Derating Curve

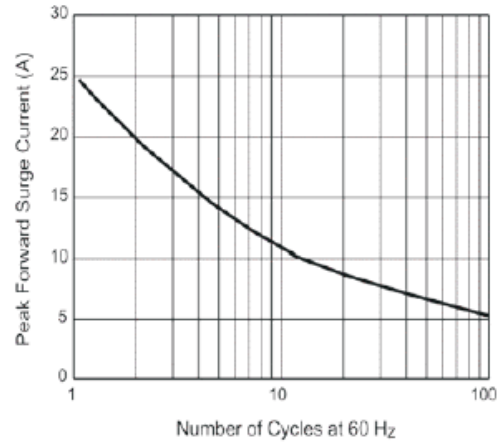


Fig.2 Maximum Non-Repetitive Peak Forward Surge Current

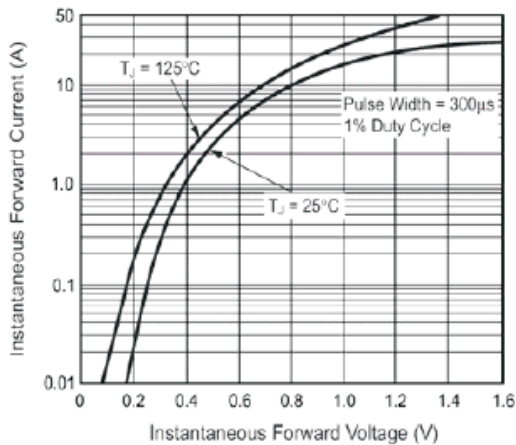


Fig.3 Typical Instantaneous Forward Characteristics

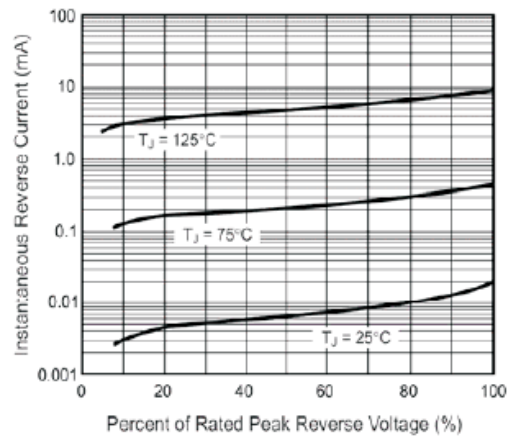


Fig.4 Typical Reverse Characteristics

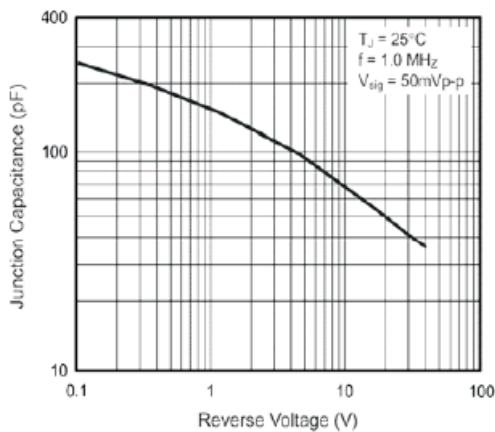


Fig.5 Typical Junction Capacitance

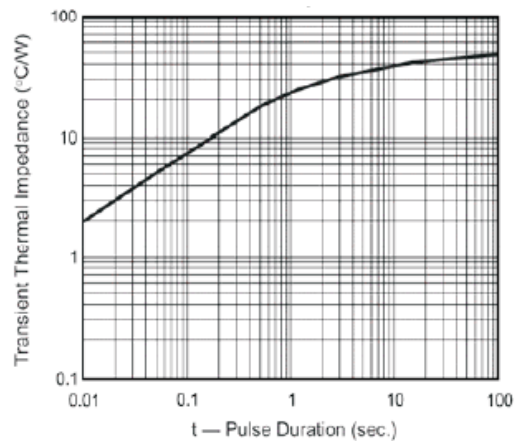


Fig.6 Typical Transient Thermal Impedance