

# 1R5GU4G

**ULTRAFAST EFFICIENT  
GLASS PASSIVATED RECTIFIER**  
VOLTAGE: 550V      CURRENT: 1.5A




## FEATURE

Low power loss  
Ultra-fast recovery time for high efficiency  
High temperature soldering guaranteed  
250°C/10sec/0.375" lead length at 5 lbs tension

## MECHANICAL DATA

Terminal: Plated axial leads solderable per  
MIL-STD 202E, method 208C  
Case: Molded with UL-94 Class V-0 recognized Flame  
Retardant Epoxy  
Polarity: color band denotes cathode  
Mounting position: any

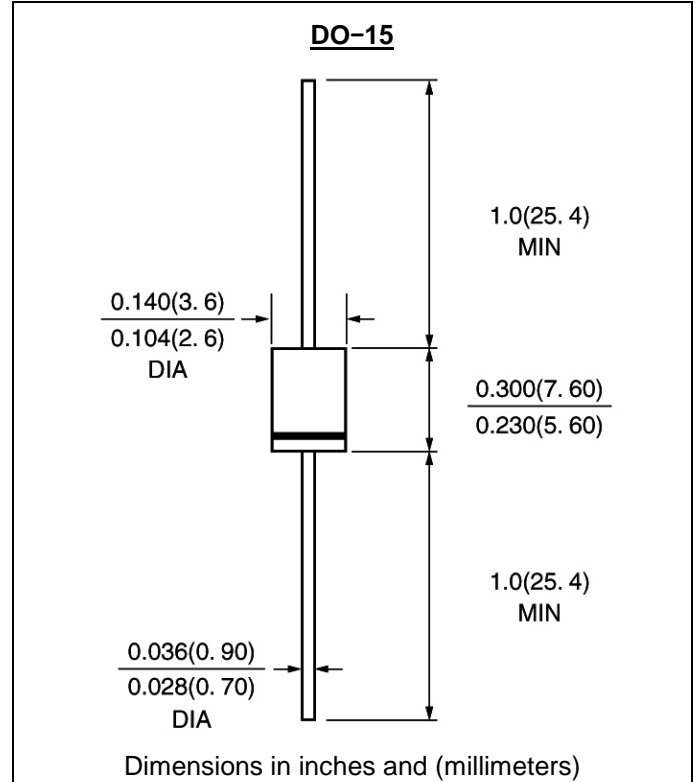

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half -wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

	SYMBOL	1R5GU4G	units
Maximum Recurrent Peak Reverse Voltage	V <sub>rrm</sub>	550	V
Maximum RMS Voltage	V <sub>rms</sub>	385	V
Maximum DC blocking Voltage	V <sub>dc</sub>	550	V
Maximum Average Forward Rectified Current 10mmlead length at Ta =35°C	I <sub>f(av)</sub>	1.5	A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load	I <sub>fsm</sub>	60	A
Maximum Forward Voltage at Forward current 1.5A Peak	V <sub>f</sub>	1.2	V
Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =125°C	I <sub>r</sub>	10.0 100.0	μ A μ A
Maximum Reverse Recovery Time (Note 1)	T <sub>rr</sub>	50	nS
Typical Thermal Resistance (Note 2)	R(ja)	60.0	°C/W
Storage and Operating Junction Temperature	T <sub>stg</sub> ,T <sub>j</sub>	-50 to +150	°C

### Note:

1. Reverse Recovery Condition I<sub>f</sub> =0.5A, I<sub>r</sub> =1.0A, I<sub>rr</sub> =0.25A
2. Thermal Resistance from Junction to Ambient at 3/8" lead length, P.C. Board Mounted

# RATINGS AND CHARACTERISTIC CURVES 1R5GU4G

1

