


# 1SS367

## ■ Features

- Small package: :SC-70
- Low forward voltage : $V_{F(3)} = 0.23 \text{ V(Typ)} @ I_F = 5 \text{ mA}$

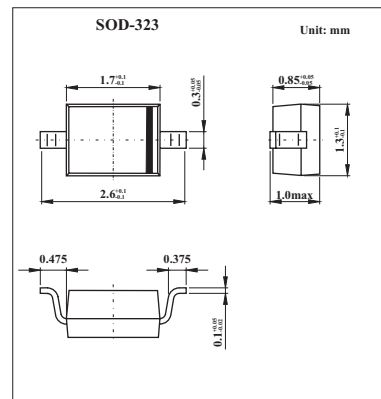

## ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Maximum (peak) reverse voltage	$V_{RM}$	15	V
Reverse voltage	$V_R$	10	V
Maximum (peak) forward current	$I_{FM}$	200	mA
Average forward current	$I_O$	100	mA
Surge current (10 ms)	$I_{FSM}$	1	A
Power dissipation	$P^{(*)}$	200	mW
Junction Temperature	$T_j$	125	$^\circ\text{C}$
Storage Temperature range	$T_{stg}$	-55 to +125	$^\circ\text{C}$
Operating temperature range	$T_{opr}$	-40 to +100	$^\circ\text{C}$

(\*) Mounted on a glass epoxy circuit board of 20 \* 20 mm, pad dimension of 4 \* 4 mm.

## ■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward voltage	$V_{F(1)}$	$I_F = 1 \text{ mA}$		0.18		V
	$V_{F(2)}$	$I_F = 5 \text{ mA}$		0.23	0.3	
	$V_{F(3)}$	$I_F = 100 \text{ mA}$		0.35	0.5	
Reverse current	$I_R$	$V_R = 10 \text{ V}$			20	$\mu\text{A}$
Total capacitance	$C_t$	$V_R = 0, f = 1.0 \text{ MHz}$		20	40	pF

## ■ Marking

Marking	S4
---------	----