


# DIODE Type : 20E6

OUTLINE DRAWING

## FEATURES

- \* Miniature Size
- \* Low Forward Voltage drop
- \* Low Reverse Leakage Current
- \* High Surge Capability
- \* 52mm Inside Tape Spacing Package Available

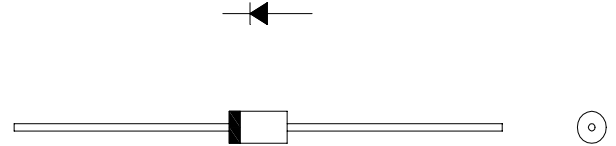

## Maximum Ratings

Approx Net Weight:0.38g

Rating	Symbol	20E6			Unit
Repetitive Peak Reverse Voltage	$V_{RRM}$	600			V
Non-repetitive Peak Reverse Voltage	$V_{RSM}$	800			V
Average Rectified Output Current	$I_O$	1.3	$T_a=33^{\circ}C$ *1	50Hz Half Sine Wave Resistive Load	A
		1.7	$T_a=43^{\circ}C$ *2		
RMS Forward Current	$I_{F(RMS)}$	2.67			A
Surge Forward Current	$I_{FSM}$	80	50Hz Half Sine Wave, 1cycle, Non-repetitive		A
Operating Junction Temperature Range	$T_{jw}$	- 40 to + 150			$^{\circ}C$
Storage Temperature Range	$T_{stg}$	- 40 to + 150			$^{\circ}C$

## Electrical • Thermal Characteristics

Characteristics	Symbol	Conditions	Min.	Typ.	Max.	Unit	
Peak Reverse Current	$I_{RM}$	$T_j= 25^{\circ}C, V_{RM}= V_{RRM}$	-	-	10	$\mu A$	
Peak Forward Voltage	$V_{FM}$	$T_j= 25^{\circ}C, I_{FM}= 1.7A$	-	-	0.92	V	
Thermal Resistance	$R_{th(j-a)}$	Junction to Ambient	*1	-	-	105	$^{\circ}C/W$
			*2	-	-	70	

\*1 : Without Fin or P.C. Board

\*2 : P.C. Board Mounted (L=8mm, Print Land=15 x 15mm, Both Sides)

20E6 OUTLINE DRAWING (Dimensions in mm)

