

KR 2156-20-75 Lowpass Filter

General Description


KR 2156-20-75 is a 20 MHz lowpass filter. The filter has a 20 MHz min 1 dB bandwidth and is designed for 75 Ω source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

Features

- 20 MHz lowpass
- 75 Ω
- DIP Package

Typical Performance

Overall Response
(10 dB/div) 100 KHz to 1 GHz

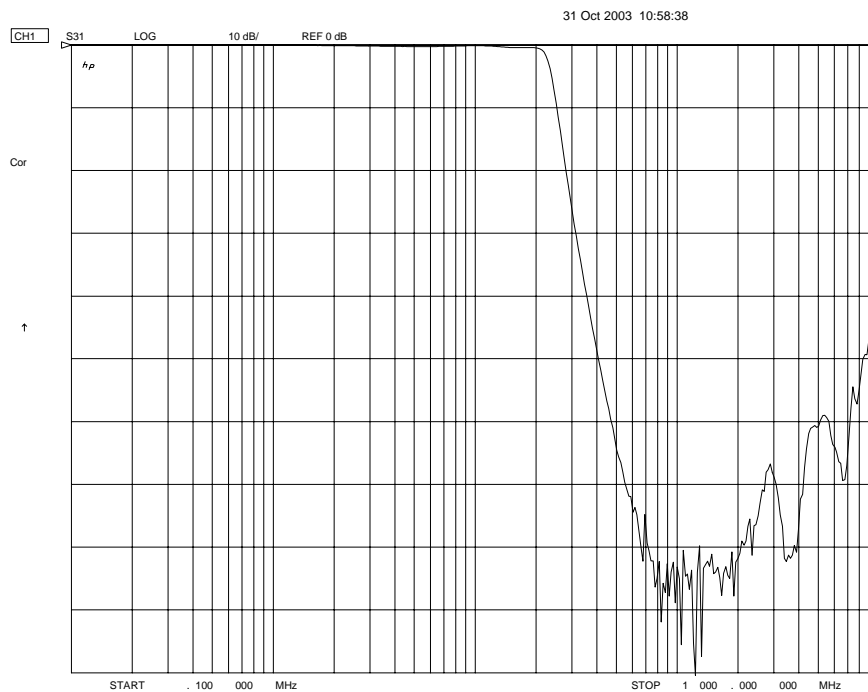


KR 2156-20-75

Specifications

Parameter	Specification
Filter type	Lowpass
Insertion Loss	< 1 dB
Attenuation at 20 MHz	< 1 dB
Attenuation at 37.5 MHz	> 40 dB
Source & Load	75 Ω

Physical Dimensions

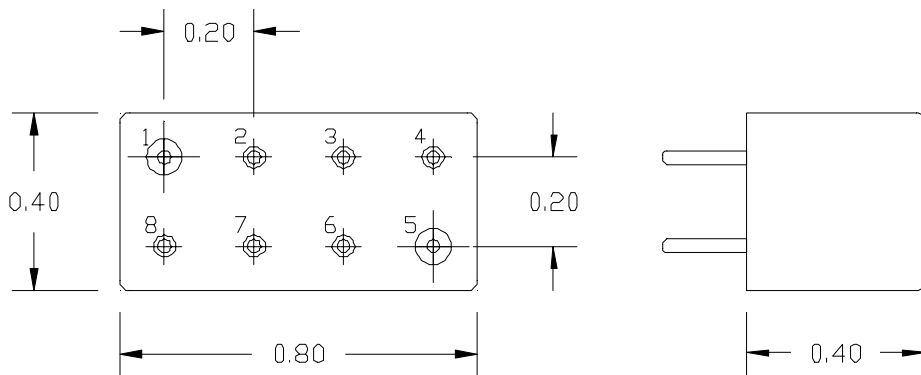

Metal Case
 Pin 1 is Input Pin 5 is Output
 All other Pins are Ground
 All leads .030" diameter
 Dimensions inches