

KR 2156-3-75 Lowpass Filter

General Description


KR 2156-3-75 is a 3 MHz lowpass filter. The filter has a 3 MHz min 1 dB bandwidth and is designed for 75 Ω source and load impedance. Other passband frequencies, bandwidths and impedances are available. Please consult the factory.

Features

- 3 MHz lowpass
- 75 Ω
- DIP Package

Typical Performance

Overall Response
(10 dB/div) 100 KHz to 100 MHz

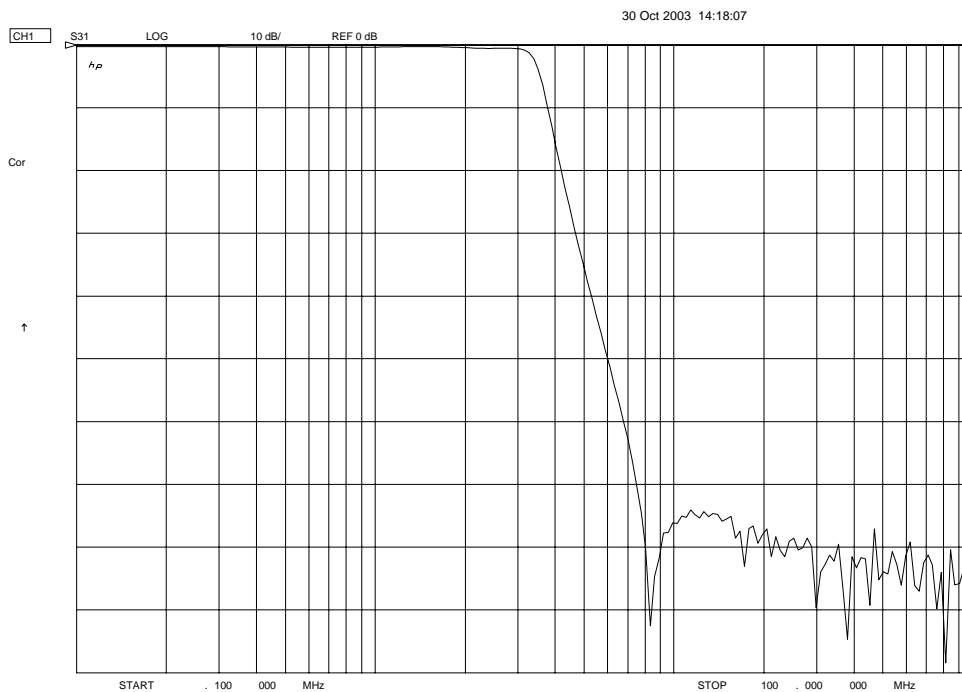


KR 2156-3-75

Specifications

| Parameter | Specification |
|--------------------------|---------------|
| Filter type | Lowpass |
| Insertion Loss | < 1 dB |
| Attenuation at 3 MHz | < 1 dB |
| Attenuation at 5.625 MHz | > 40 dB |
| Source & Load | 75 Ω |
| | |
| | |
| | |
| | |

Physical Dimensions

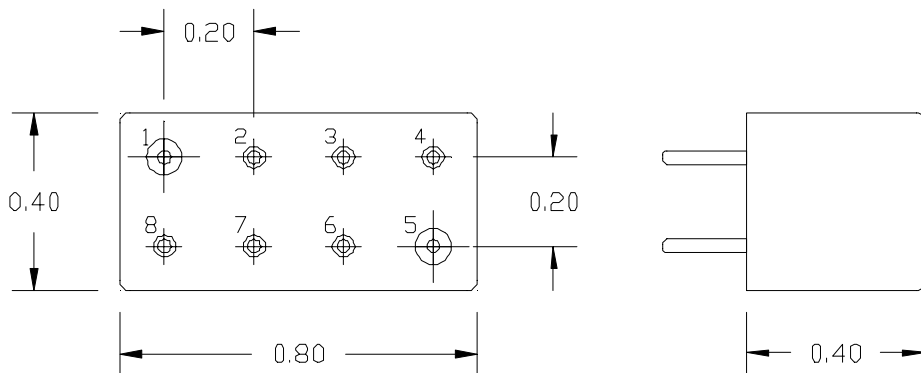

Metal Case
 Pin 1 is Input Pin 5 is Output
 All other Pins are Ground
 All leads .030" diameter
 Dimensions inches