


SAW Bandpass Filter 241001B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -30°C ~ 80°C
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

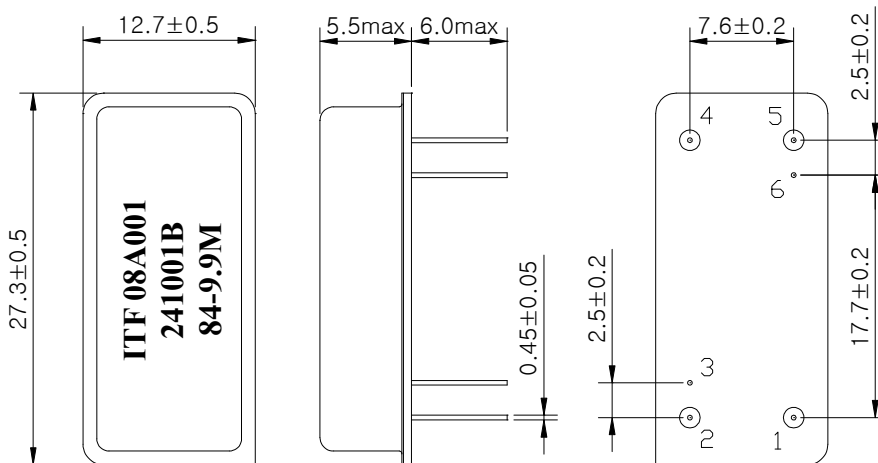

Package : D2712

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	241001B	
		Rev. Date	2008-1-28	
		Rev.	NM8003-CS01	1/5

SAW Bandpass Filter 241001B



3. Specifications

F_o = 84.0 MHz


Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	-	84.0	-
Insertion Loss	dB	-	23.6	25.0
1dB Bandwidth	MHz	-	9.92	-
3dB Bandwidth	MHz	10.1	10.22	-
40dB Bandwidth	MHz	-	11.35	11.5
Amplitude Ripple (f _o ± 4.8 MHz)	dB	-	0.62	1.0
Group Delay Variation (f _o ± 4.8 MHz)	nsec	-	35	100
Absolute Delay	usec	-	2.56	-
Ultimate Rejection	dB	50	55	-
Temperature Coefficient of Frequency	ppm/°C	-	-72	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	241001B	
		Rev. Date	2008-1-28	
		Rev.	NM8003-CS01	2/5

SAW Bandpass Filter 241001B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

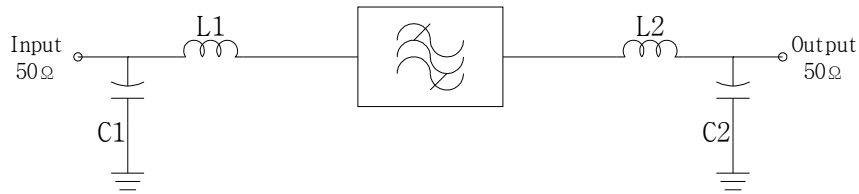

L1 = 33nH, L2 = 33nH

C1 = 39pF, C2 = 39pF

5. Marking Configuration

ITF¹⁾ 08A001²⁾

241001B³⁾

84⁴⁾ -9.9M⁵⁾


1) Manufacturer name

2) Lot Number

3) Part Number

4) Center Frequency



5) 1dB-Bandwidth

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	241001B	
		Rev. Date	2008-1-28	
		Rev.	NM8003-CS01	3/5

SAW Bandpass Filter 241001B







6. Typical Performance (at +25°C)

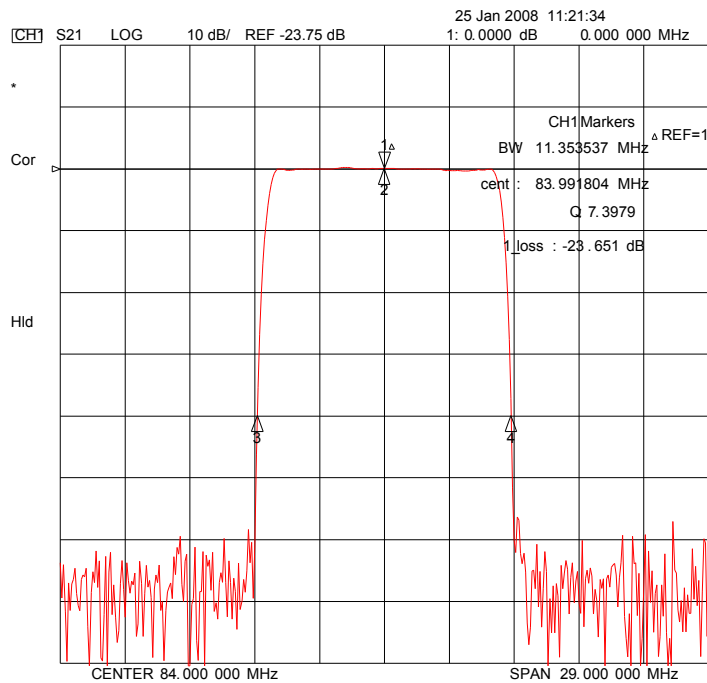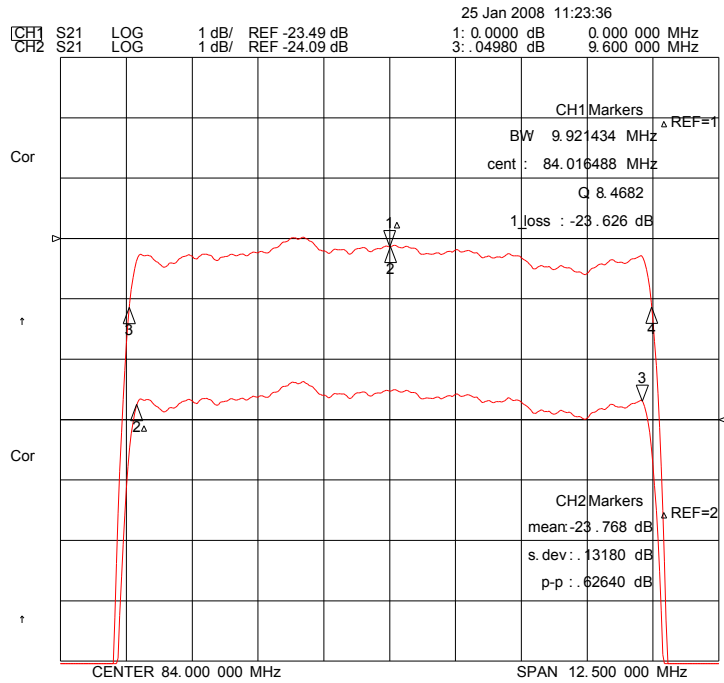

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	241001B	
		Rev. Date	2008-1-28	
		Rev.	NM8003-CS01	4/5

SAW Bandpass Filter 241001B

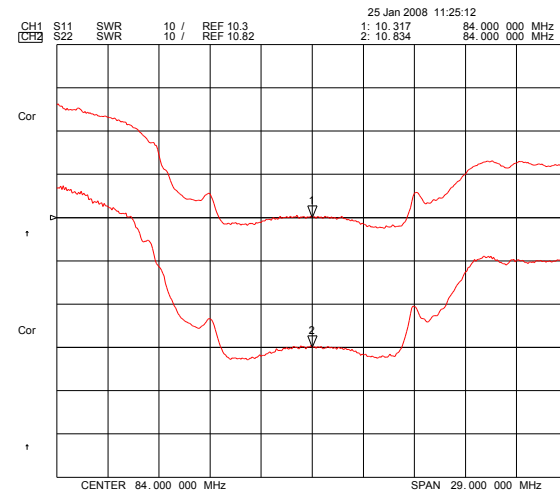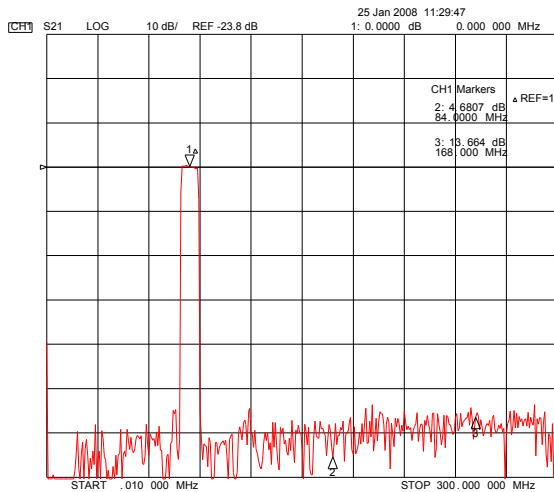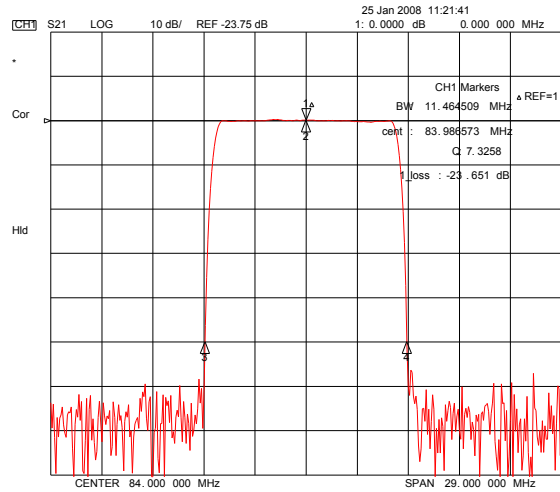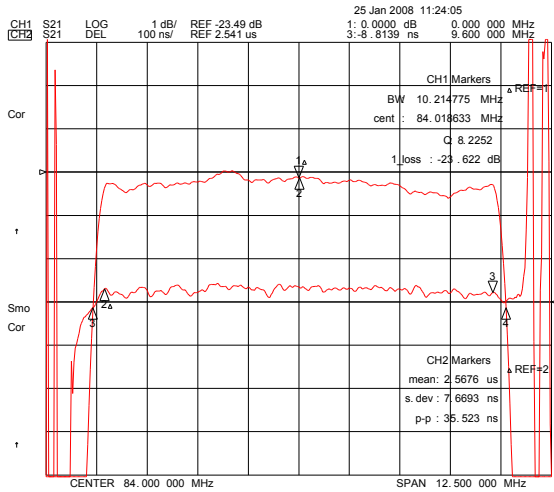

ITF Co., Ltd.
 102-901, Bucheon Technopark 364,
 Samjeong-Dong, Ojeong-Gu, Bucheon-City,
 Gyeonggi-Do, Korea 421-809

Part No.	241001B	
Rev. Date	2008-1-28	
Rev.	NM8003-CS01	5/5