

# KR Electronics

## General Description


KR 2716 is a 26 MHz bandpass filter. The filter has a minimum 0.7 dB bandwidth of 4 MHz. Other passband frequencies are available. Please consult the factory.

### Features


- SMA Connectors
- Sharp Transition to Stopband
- 50  $\Omega$  Source and Load

## Typical Performance

**Passband Amplitude & Group Delay**  
(0.5 dB/div and 20 nsec/div)

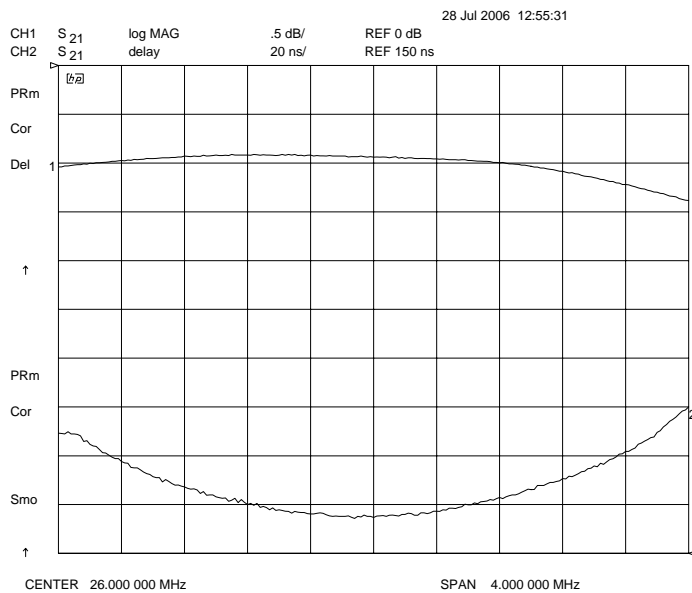

**Overall Response**  
(10 dB/div)

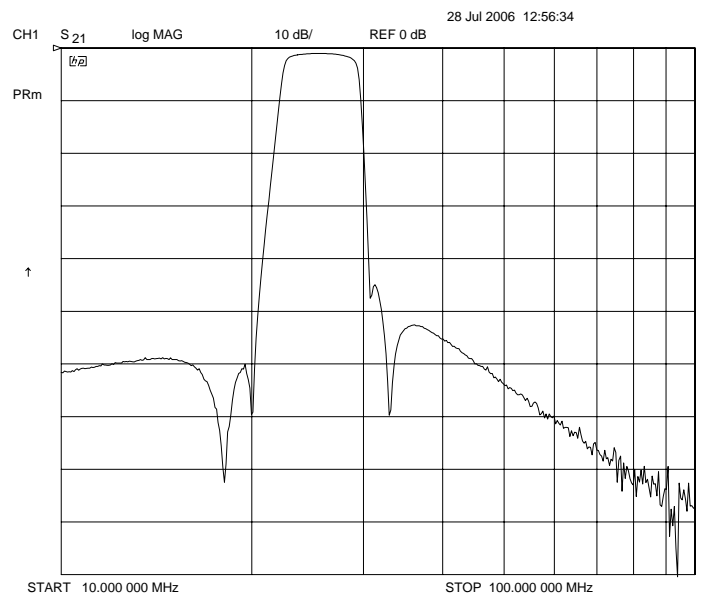

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web www.krfilters.com  
Email sales@krfilters.com  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 2716

## Specifications

Parameter	Specification
Filter type	Bandpass
Center Frequency	26 MHz
Insertion Loss	< 1.5 dB
0.7 dB Bandwidth	4 MHz min
Attenuation at 20.2 MHz	50 dB min
Attenuation at 30.7 MHz	36 dB min
Source and Load	50 Ω

## Physical Dimensions

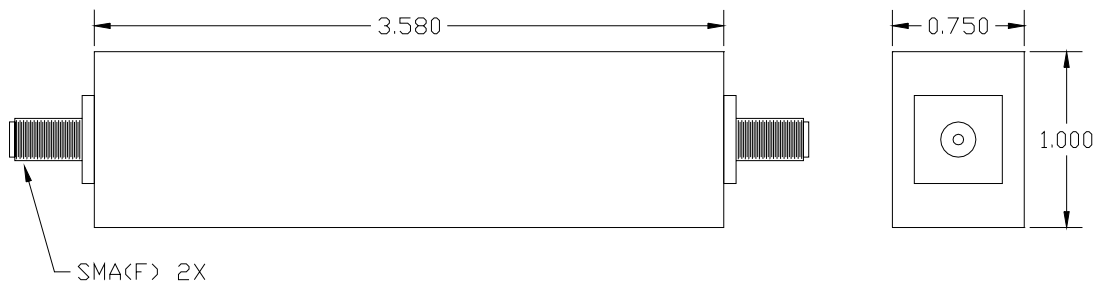

**Notes:**

1. Dimensions in inches