


## 2CL74A High Voltage Diode



### FEATURES

- Low leakage,high surge capability
- High voltage,fast recovery rectifier
- $T_j:-40^{\circ}\text{C} \sim +150^{\circ}\text{C}$
- Polyimide passivation technology
- Epoxy resin molding,compact encapsulation
- ROHS compliant

DEVICE ELECTRICAL CHARACTERISTICS (25°C ambient temperature unless stated otherwise)	CONDITIONS	SYMBOL	2CL74A
Repetitive Peak Reverse Voltage		$V_{RRM}$	14KV
Average Forward Current		$I_{AV}$	5.0mA
Non-Repetitive Peak Forward Current	$T_a=25^{\circ}\text{C}$ , rated load , half cycle , single phase , 50Hz	$I_{FSM}$	0.5A
Allowable Junction Temperature	half cycle sinewave peak voltage	$T_j$	120°C
Allowable Operating Case Temperature		$T_c$	100°C
Storage Temperature Range		$T_{stg}$	-40~120°C
Maximum Forward Voltage Drop	$I_F=10\text{mA}$	$V$	51.0V
Maximum Reverse Recovery Time	$I_F=2\text{mA}$ $I_R=4\text{mA}$	$trr$	0.08μS
Maximum Reverse Current	$V_R=V_{RRM}$ , 25 °C	$I_{R1}$	2.0μA
Maximum Reverse Current	$V_R=V_{RRM}$ , 100 °C	$I_{R2}$	5.0μA
Maximum Junction Capacitance		$C_j$	2pF

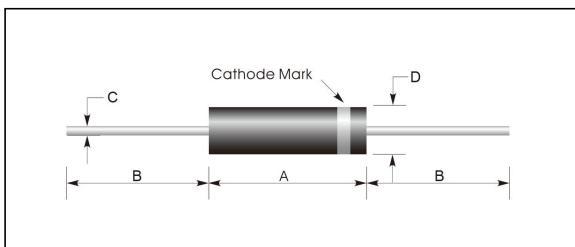

SYMBOL	2CL74A ( Unit : mm )
A	10.0
D	Φ2.5
B	24
C	Φ0.6