

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

2N297 A
POWER
TRANSISTOR


TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

GERMANIUM PNP POWER TRANSISTOR

2N297A is a germanium PNP alloy junction power transistor meeting military specification MIL-T-19500.36A (SigC). The maximum collector-emitter voltage rating is 50 volts, and the collector current rating is 5 amperes. 2N297A will readily dissipate 35 watts at 25°C and 10 watts at 75°C.

High current switching, audio amplification, small motor and servo drivers are typical applications for the transistor. There are numerous other applications to regulators, power supply and oscillator circuits.

2N297A transistor features welded construction and cadmium plating with a vacuum-tight seal to insure long life and stable operation. Mechanical dimensions conform to the JEDEC TO-3 outline.

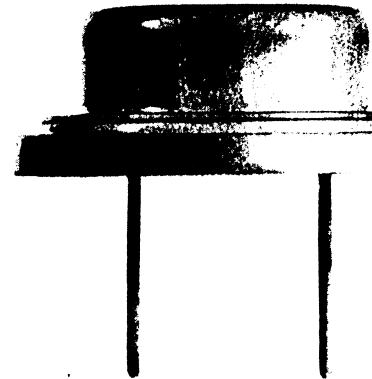


ABSOLUTE MAXIMUM RATINGS

V_{CE} Vdc	V_{CB} Vdc	I_C A dc	P_c W	$T_{storage}$ °C	T_j °C
50	60	5.0	35	-65 to +95	95

Thermal Resistance: 1.5°C/W typical and 2°C/W maximum.

ELECTRICAL CHARACTERISTICS (25°C mounting base temperature unless otherwise specified)

CHARACTERISTIC	SYMBOL	MIN.	MAX.	UNIT
DC Current Gain	h_{FE}			
$V_{CE} = -2$ Vdc; $I_C = -0.5$ A dc		40	100	—
$V_{CE} = -2$ Vdc; $I_C = -2.0$ A dc		20	—	—
Transconductance				
$V_{CE} = -2$ Vdc; $I_C = -2.0$ A dc	g_{FE}	1.33	—	mhos
Collector Saturation Voltage				
$I_C = -2$ A dc; $I_B = -200$ mA dc	$V_{CE(S)}$	—	-1.0	Vdc
Collector Cutoff Current	I_{CBO}			
$V_{CB} = -2$ Vdc; $I_E = 0$		—	-200	μ A dc
$V_{CB} = -60$ Vdc; $I_E = 0$		—	-3.0	mA dc
$V_{CB} = -30$ Vdc; $I_E = 0$; $T_B = 71^\circ\text{C}$		—	-6.0	mA dc
Emitter Cutoff Current	I_{EBO}			
$V_{EB} = -40$ Vdc; $I_C = 0$			-3.0	mA dc



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.