

2N4851  
2N4852  
2N4853

**PN SILICON  
UNIJUNCTION TRANSISTOR**



**TO-18 (UJT) CASE**



[www.centralemi.com](http://www.centralemi.com)

**DESCRIPTION:**

The CENTRAL SEMICONDUCTOR 2N4851, 2N4852, and 2N4853 are Silicon PN Unijunction Transistors designed for timing, sensing, and trigger circuits.

**MARKING: FULL PART NUMBER**

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$ )

Emitter Reverse Voltage	$V_{B2E}$	30	V
Interbase Voltage	$V_{B2B1}$	35	V
RMS Emitter Current	$I_e$	50	mA
Peak Emitter Current (Duty Cycle $\leq 1\%$ , PRR $\leq 10$ pps)	$i_e$	1.5	A
RMS Power Dissipation	$P_D$	300	mW
Operating Junction Temperature	$T_J$	-65 to +125	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-65 to +200	$^\circ\text{C}$

**SYMBOL**

$V_{B2E}$	30	
$V_{B2B1}$	35	
$I_e$	50	
$i_e$	1.5	
$P_D$	300	
$T_J$	-65 to +125	
$T_{stg}$	-65 to +200	

**UNITS**

V
V
mA
A
mW
$^\circ\text{C}$
$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)



SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
$\eta$	$V_{B2B1}=10\text{V}$ (2N4851)	0.56	0.75	
$\eta$	$V_{B2B1}=10\text{V}$ (2N4852, 2N4853)	0.70	0.85	
$R_{BB}$	$V_{B2B1}=3.0\text{V}$	4.7	9.1	k $\Omega$
$I_{EB2O}$	$V_{B2E}=30\text{V}$ (2N4851, 2N4852)		100	nA
$I_{EB2O}$	$V_{B2E}=30\text{V}$ (2N4853)		50	nA
$I_V$	$V_{B2B1}=20\text{V}$ , $R_{B2}=100\Omega$ (2N4851)	2.0		mA
$I_V$	$V_{B2B1}=20\text{V}$ , $R_{B2}=100\Omega$ (2N4852)	4.0		mA
$I_V$	$V_{B2B1}=20\text{V}$ , $R_{B2}=100\Omega$ (2N4853)	6.0		mA
$I_P$	$V_{B2B1}=25\text{V}$ (2N4851, 2N4852)		2.0	$\mu\text{A}$
$I_P$	$V_{B2B1}=25\text{V}$ (2N4853)		0.4	$\mu\text{A}$
$V_{OB1}$	$V_1=20\text{V}$ (2N4851)	3.0		V
$V_{OB1}$	$V_1=20\text{V}$ (2N4852)	5.0		V
$V_{OB1}$	$V_1=20\text{V}$ (2N4853)	6.0		V

2N4851  
2N4852  
2N4853

PN SILICON  
UNIJUNCTION TRANSISTOR



TO-18 (UJT) CASE - MECHANICAL OUTLINE

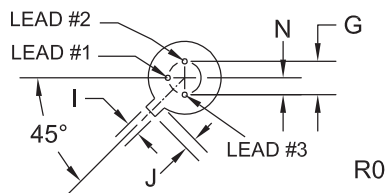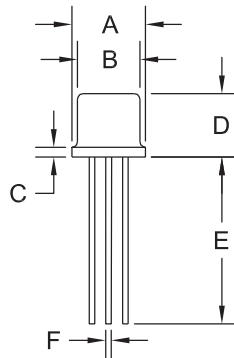

LEAD CODE:

- 1) Emitter
- 2) Base 1
- 3) Base 2

MARKING: FULL PART NUMBER

SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.209	0.230	5.31	5.84
B (DIA)	0.178	0.195	4.52	4.95
C	-	0.030	-	0.76
D	0.170	0.210	4.32	5.33
E	0.500	-	12.70	-
F (DIA)	0.016	0.019	0.41	0.48
G (DIA)	0.100		2.54	
H	0.050		1.27	
I	0.036	0.046	0.91	1.17
J	0.028	0.048	0.71	1.22

TO-18 (UJT) (REV: R0)

R2 (13-December 2010)