

isc Silicon PNP Power Transistor

2SA1028

DESCRIPTION



- High Current Capability
- Good Linearity of  $h_{FE}$
- Collector-Emitter Breakdown Voltage-  
:  $V_{(BR)CEO} = -100V(\text{Min.})$

APPLICATIONS

- Designed for audio and general purpose applications.

ABSOLUTE MAXIMUM RATINGS( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-100	V
$V_{CEO}$	Collector-Emitter Voltage	-100	V
$V_{EBO}$	Emitter-Base Voltage	-5	V
$I_C$	Collector Current-Continuous	-10	A
$P_C$	Collector Power Dissipation @ $T_c=25^\circ\text{C}$	95	W
$T_j$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature	-55~150	$^\circ\text{C}$

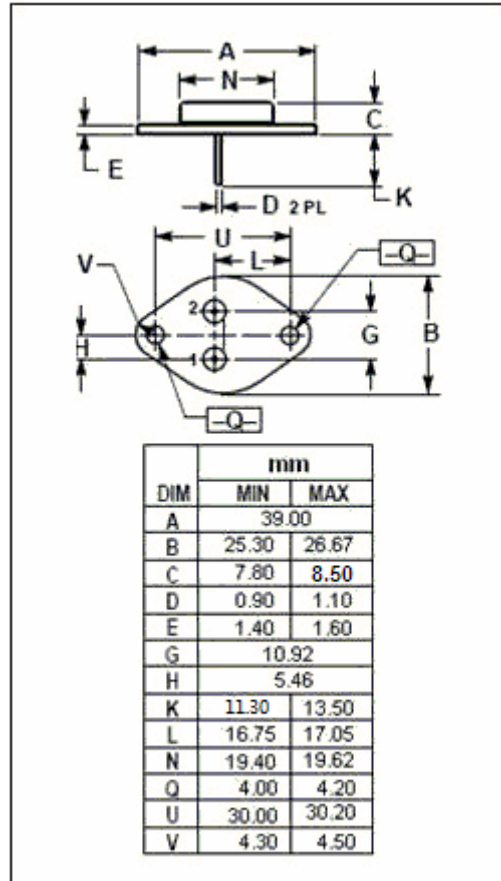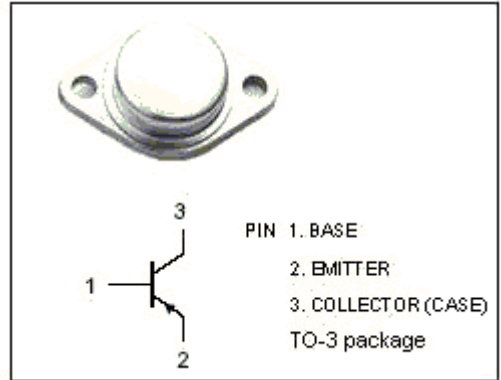

**isc Silicon PNP Power Transistor****2SA1028****ELECTRICAL CHARACTERISTICS**T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> = -30mA; I <sub>B</sub> = 0	-100			V
V <sub>(BR)CBO</sub>	Collector-Base Breakdown Voltage	I <sub>C</sub> = -1mA; I <sub>E</sub> = 0	-100			V
V <sub>(BR)EBO</sub>	Emitter-Base Breakdown Voltage	I <sub>E</sub> = -1mA; I <sub>C</sub> = 0	-5			V
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = -5A; I <sub>B</sub> = -0.5A			-1.2	V
V <sub>BE(sat)</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = -5A; I <sub>B</sub> = -0.5A			-1.8	V
I <sub>CBO</sub>	Collector Cutoff Current	V <sub>CB</sub> = -100V; I <sub>E</sub> = 0			-10	μ A
I <sub>EBO</sub>	Emitter Cutoff Current	V <sub>EB</sub> = -5V; I <sub>C</sub> = 0			-10	μ A
h <sub>FE</sub>	DC Current Gain	I <sub>C</sub> = -0.1A; V <sub>CE</sub> = -2V	50			
f <sub>T</sub>	Current-Gain—Bandwidth Product	I <sub>C</sub> = -1A; V <sub>CE</sub> = -10V		60		MHz