

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005

Silicon PNP Power Transistor**2SA1879****DESCRIPTION**

- Collector-Emitter Sustaining Voltage-
: $V_{CEO(SUS)} = -80(V)(Min.)$
- Low Collector Saturation Voltage
: $V_{CE(sat)} = -0.3(V)(Max.) @ I_C = -3.5A$
- Large Current Capability- $I_C = -7A$

APPLICATIONS



- Designed for use as a driver in DC/DC converters and actuators.

ABSOLUTE MAXIMUM RATINGS($T_a = 25^\circ C$)


SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-80	V
V_{CEO}	Collector-Emitter Voltage	-80	V
V_{EBO}	Emitter-Base Voltage	-7	V
I_C	Collector Current-Continuous	-7	A
I_{CM}	Collector Current-Peak	-14	A
I_B	Base Current-Continuous	-1.5	A
I_{BM}	Base Current-Peak	-2	A
P_C	Total Power Dissipation @ $T_C = 25^\circ C$	25	W
T_J	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature Range	-55~150	$^\circ C$

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th\ j-c}$	Thermal Resistance, Junction to Case	5	$^\circ C/W$

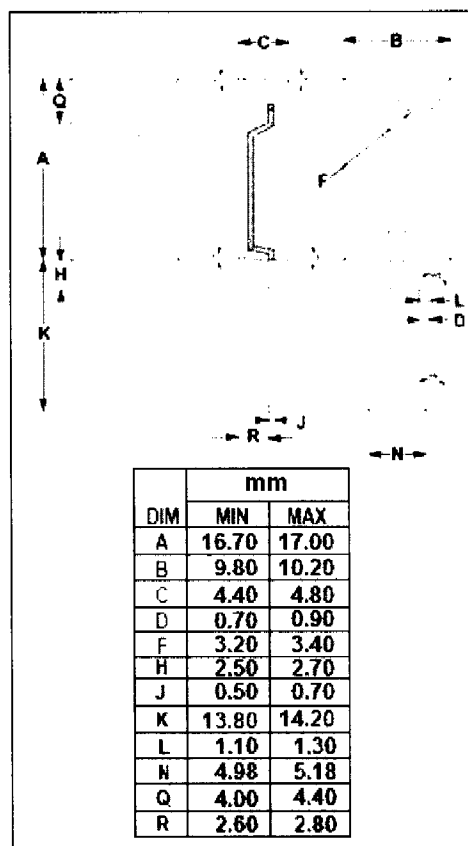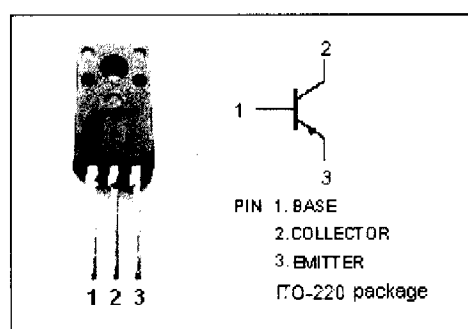

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

Silicon PNP Power Transistor

2SA1879

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE0(SUS)}$	Collector-Emitter Sustaining Voltage	$I_C = -0.1\text{A}; I_B = 0$	-80			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -3.5\text{A}; I_B = -0.35\text{A}$			-0.3	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = -3.5\text{A}; I_B = -0.35\text{A}$			-1.2	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = -80\text{V}; I_E = 0$			-100	μA
I_{CEO}	Collector Cutoff Current	$V_{CE} = -80\text{V}; I_B = 0$			-100	μA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -7\text{V}; I_C = 0$			-100	μA
h_{FE}	DC Current Gain	$I_C = -3.5\text{A}; V_{CE} = -2\text{V}$	70			
f_T	Current-Gain—Bandwidth Product	$I_C = -0.7\text{A}; V_{CE} = -10\text{V}$		50		MHz

Switching Times

t_{on}	Turn-on Time	$I_C = -3.5\text{A}, I_{B1} = -I_{B2} = -0.35\text{A}, R_L = 8\ \Omega, V_{BB2} = -4\text{V};$			0.3	μs
t_{stg}	Storage Time				1.5	μs
t_f	Fall Time				0.2	μs