

# isc Silicon PNP Power Transistor

# 2SB1216

### DESCRIPTION


- Excellent linearity of  $h_{FE}$
- Small and slim package facilitating compactness of sets
- Low collector-to-emitter saturation voltage
- Fast switching speed
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

### APPLICATIONS

- Relay drivers, High speed inverters, converters and other general high-current switching applications

### ABSOLUTE MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

SYMBOL	PARAMETER	VALUE	UNIT
$V_{CBO}$	Collector-Base Voltage	-120	V
$V_{CEO}$	Collector-Emitter Voltage	-100	V
$V_{EBO}$	Emitter-Base Voltage	-6	V
$I_C$	Collector Current-Continuous	-4	A
$I_{CP}$	Collector Current-Pulse	-8	A
$P_C$	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	20	W
	Collector Power Dissipation @ $T_a=25^\circ\text{C}$	1.0	W
$T_J$	Junction Temperature	150	$^\circ\text{C}$
$T_{stg}$	Storage Temperature Range	-55~150	$^\circ\text{C}$

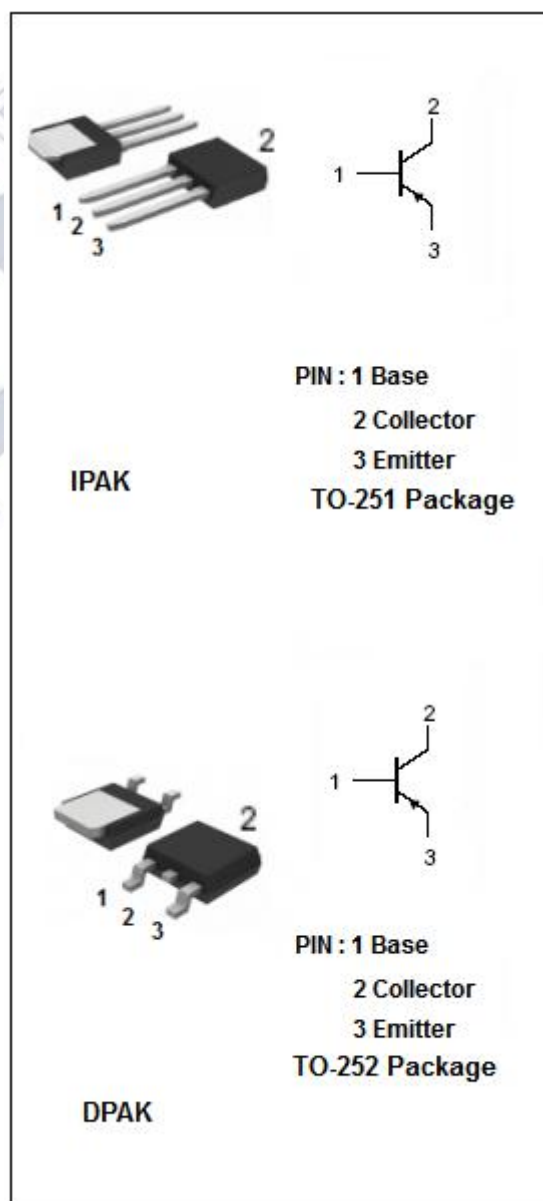

**isc Silicon PNP Power Transistor****2SB1216****ELECTRICAL CHARACTERISTICS****T<sub>c</sub>=25°C unless otherwise specified**

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CE(sat)</sub>	Collector-Emitter Saturation Voltage	I <sub>C</sub> = -2A; I <sub>B</sub> = -200mA			-0.5	V
V <sub>BE(sat)</sub>	Base-Emitter Saturation Voltage	I <sub>C</sub> = -2A; I <sub>B</sub> = -200mA			-1.2	V
V <sub>(BR)CBO</sub>	Collector-Base Breakdown Voltage	I <sub>C</sub> = -10uA; I <sub>B</sub> = 0	-120			V
V <sub>(BR)CEO</sub>	Collector-Emitter Breakdown Voltage	I <sub>C</sub> = -1mA; I <sub>B</sub> = 0	-100			V
V <sub>(BR)EBO</sub>	Emitter-Base Breakdown Voltage	I <sub>E</sub> = -10uA; I <sub>C</sub> = 0	-5			V
I <sub>CBO</sub>	Collector Cutoff Current	V <sub>CB</sub> = -100V; I <sub>E</sub> = 0			-1	uA
I <sub>EBO</sub>	Emitter Cutoff Current	V <sub>EB</sub> = -4V; I <sub>C</sub> = 0			-1	uA
h <sub>FE1</sub>	DC Current Gain	I <sub>C</sub> = -0.5A; V <sub>CE</sub> = -5V	70		400	
h <sub>FE2</sub>	DC Current Gain	I <sub>C</sub> = -3A; V <sub>CE</sub> = -5V	40			
C <sub>OB</sub>	Output Capacitance	I <sub>E</sub> = 0; V <sub>CB</sub> = -10V; f= 1.0MHz		65		pF
f <sub>T</sub>	Current-Gain—Bandwidth Product	I <sub>C</sub> = -0.5A; V <sub>CE</sub> = -10V		130		MHz

◆ **h<sub>FE1</sub> Classifications**

Q	R	S	T
70-140	100-200	140-280	200-400

isc Silicon PNP Power Transistor

2SB1216

Outline Drawing

