

<b>SANYO</b>	No.2540A	<b>2SB1216/2SD1816</b>
		PNP/NPN Epitaxial Planar Silicon Transistors High-Current Switching Applications

**Applications**

- . Suitable for relay drivers, high-speed inverters, converters, and other general high-current switching applications

**Features**

- . Low collector to emitter saturation voltage
- . Good linearity of  $h_{FE}$
- . Small and slim package facilitating compactness of sets
- . High  $f_T$
- . Fast switching time

( ): 2SB1216

**Absolute Maximum Ratings at  $T_a=25^\circ\text{C}$**

			unit
Collector to Base Voltage	$V_{CBO}$	(-)120	V
Collector to Emitter Voltage	$V_{CEO}$	(-)100	V
Emitter to Base Voltage	$V_{EBO}$	(-)6	V
Collector Current	$I_C$	(-)4	A
Collector Current(Pulse)	$I_{CP}$	(-)8	A
Collector Dissipation	$P_C$	1	W
		20	W
Junction Temperature	$T_j$	150	$^\circ\text{C}$
Storage Temperature	$T_{stg}$	-55 to +150	$^\circ\text{C}$

**Electrical Characteristics at  $T_a=25^\circ\text{C}$**

			min	typ	max	unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB}=(-)100\text{V}, I_E=0$			(-)1	$\mu\text{A}$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB}=(-)4\text{V}, I_C=0$			(-)1	$\mu\text{A}$
DC Current Gain	$h_{FE}(1)$	$V_{CE}=(-)5\text{V}, I_C=(-)0.5\text{A}$	70*		400*	
	$h_{FE}(2)$	$V_{CE}=(-)5\text{V}, I_C=(-)3\text{A}$	40			


Continued on next page.

\*: The 2SB1216/2SD1816 are classified by 0.5A  $h_{FE}$  as follows:

70	Q	140	100	R	200	140	S	280	200	T	400
----	---	-----	-----	---	-----	-----	---	-----	-----	---	-----


**Package Dimensions 2045B**

(unit:mm)

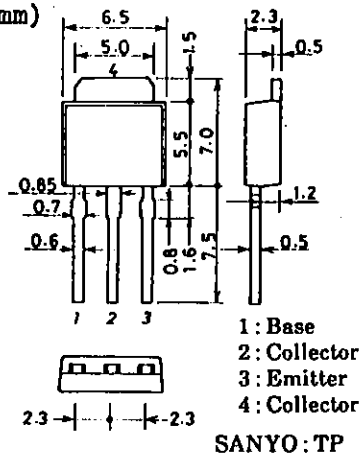

**Package Dimensions 2044B**






(unit:mm)

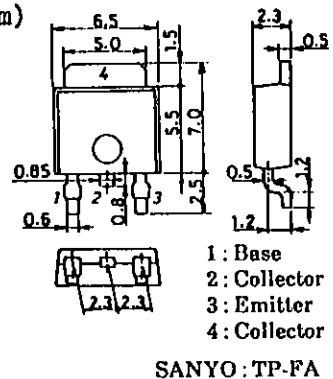









Continued from preceding page.

			min	typ	max	unit
Gain-Bandwidth Product	$f_T$	$V_{CE}=(-)10V, I_C=(-)0.5A$		180 (130)		MHz
Output Capacitance	$c_{ob}$	$V_{CB}=(-)10V, f=1MHz$		(65)40		pF
C-E Saturation Voltage	$V_{CE(sat)}$	$I_C=(-)2A, I_B=(-)0.2A$		150 (-200)	400 (-500)	mV
B-E Saturation Voltage	$V_{BE(sat)}$	$I_C=(-)2A, I_B=(-)0.2A$		(-)0.9	(-)1.2	V
C-B Breakdown Voltage	$V_{(BR)CBO}$	$I_C=(-)10\mu A, I_E=0$	(-)	120		V
C-E Breakdown Voltage	$V_{(BR)CEO}$	$I_C=(-)1mA, R_{BE}=\infty$	(-)	100		V
E-B Breakdown Voltage	$V_{(BR)EBO}$	$I_E=(-)10\mu A, I_C=0$	(-)	6		V
Turn-on Time	$t_{on}$	See specified Test Circuit.		100		ns
Storage Time	$t_{stg}$	"		(800)900		ns
Fall Time	$t_f$	"		50		ns





Switching Time Test Circuit

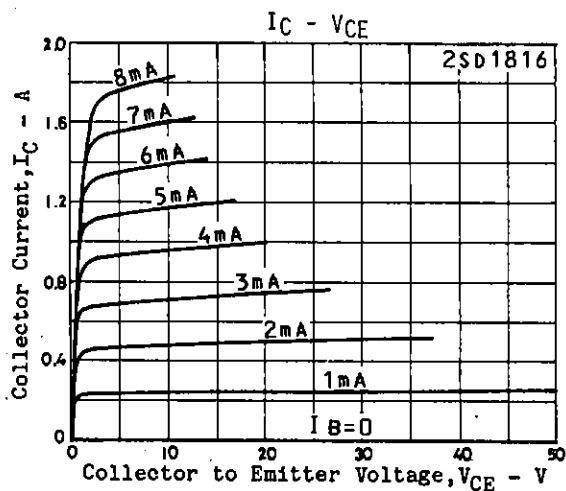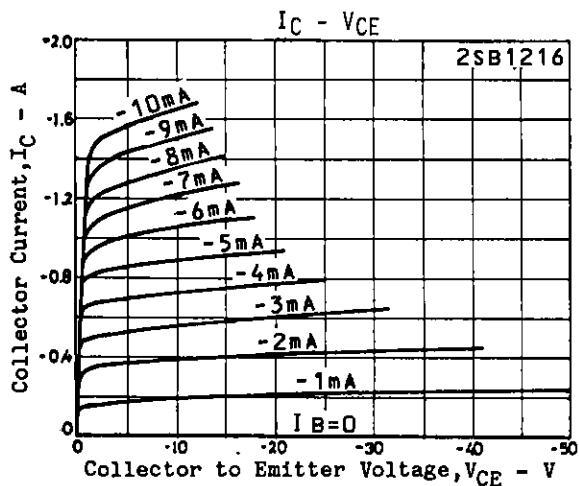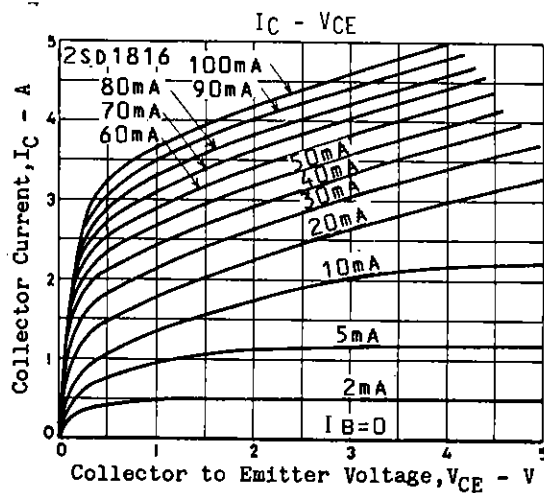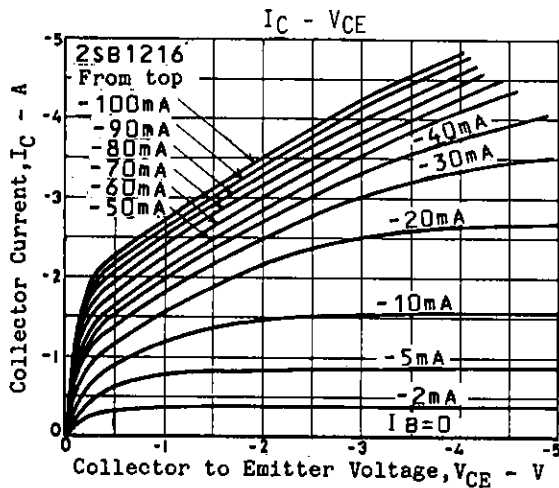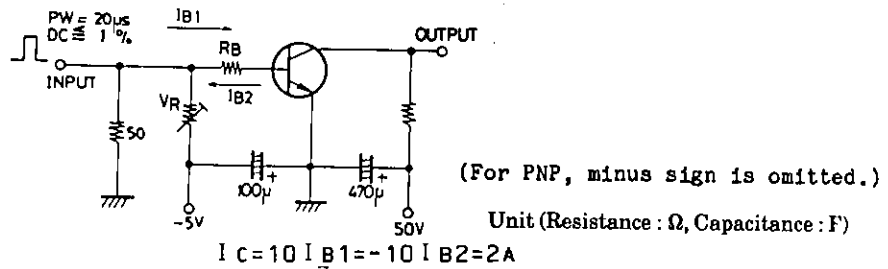

2SB1216/2SD1816

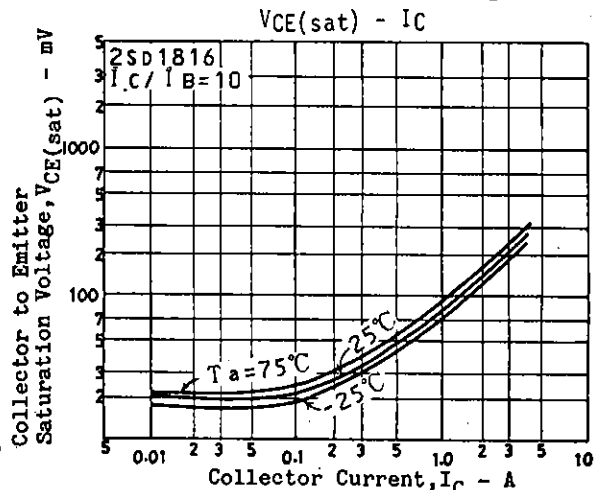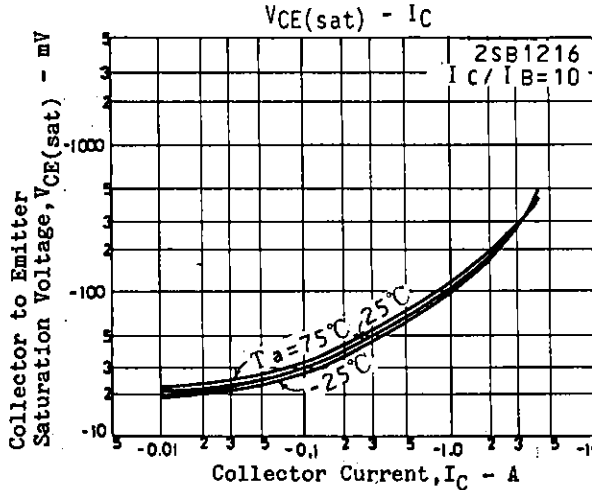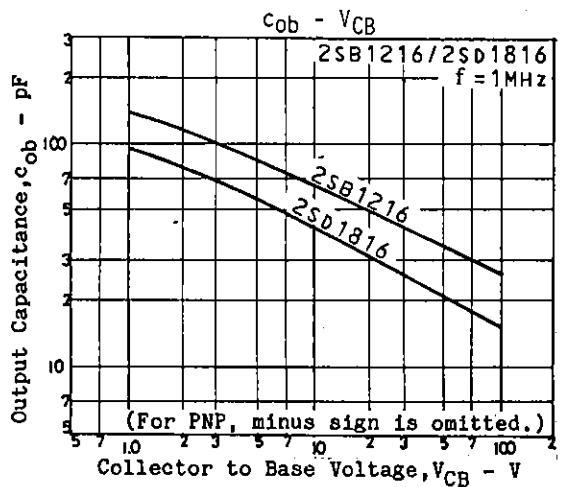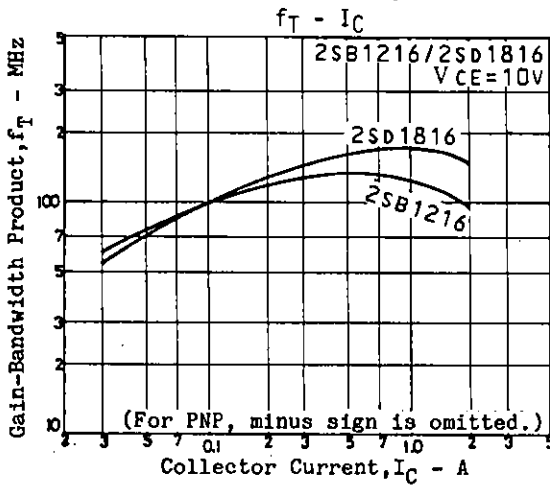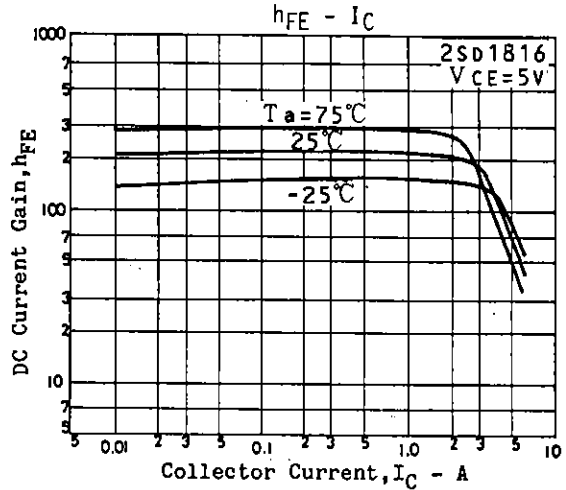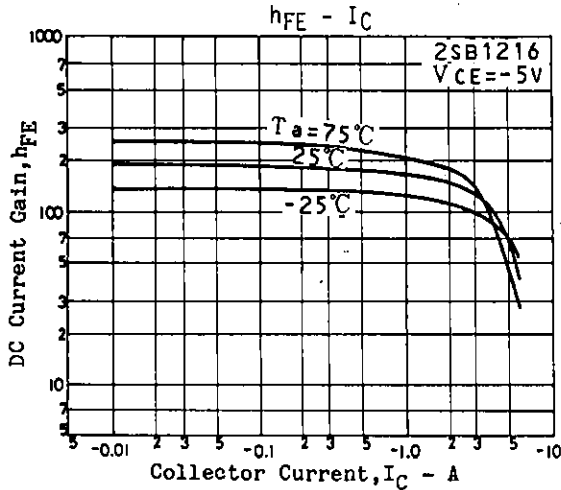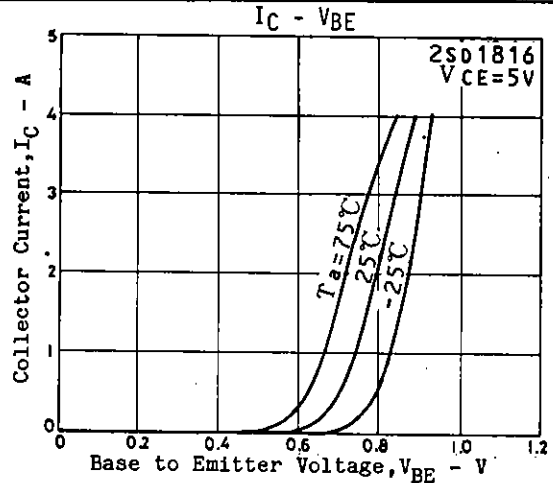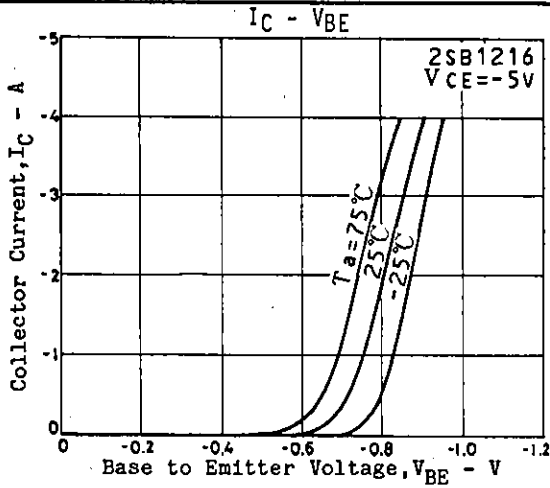

2SB1216/2SD1816

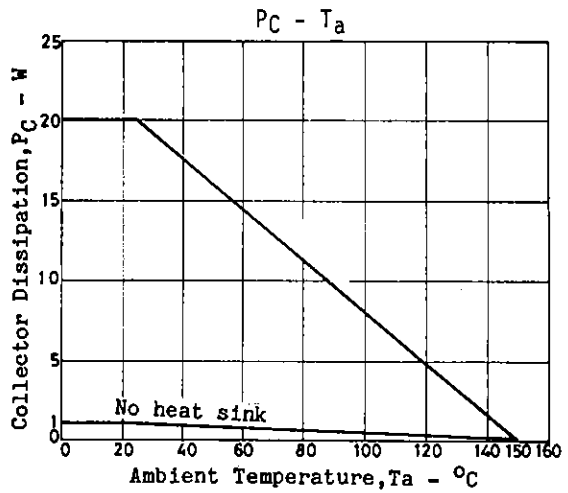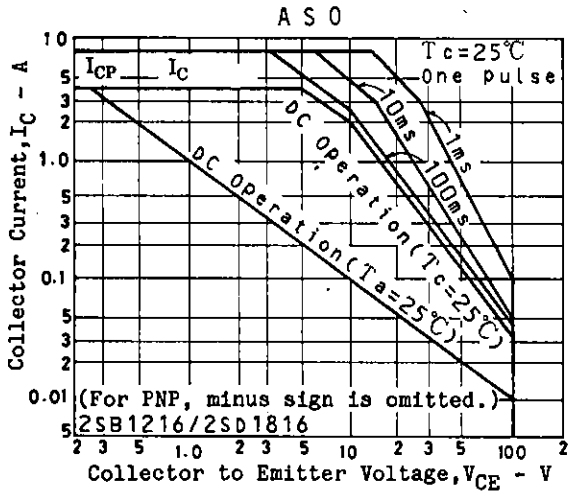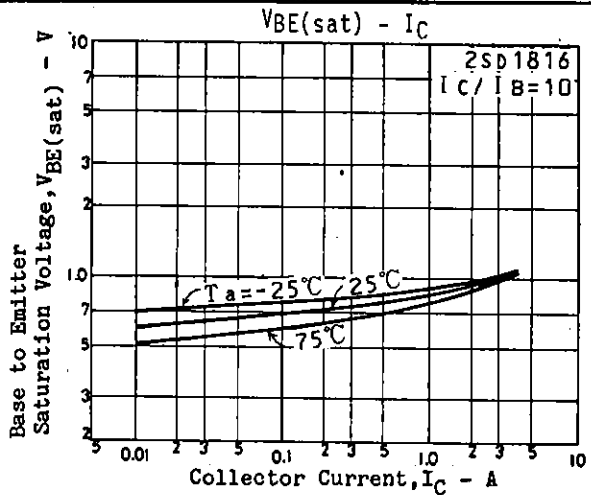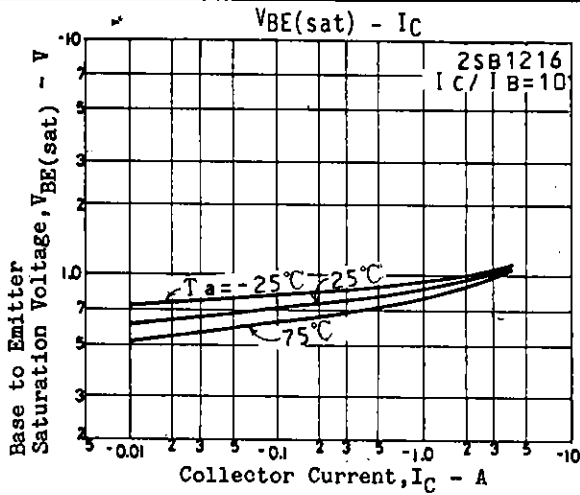

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use;
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.