

Silicon PNP Power Transistors

2SB1258

DESCRIPTION

- With TO-220F package
- Complement to type 2SD1785
- High DC current gain
- DARLINGTON

APPLICATIONS

- Driver for solenoid ,relay and motor and general purpose

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

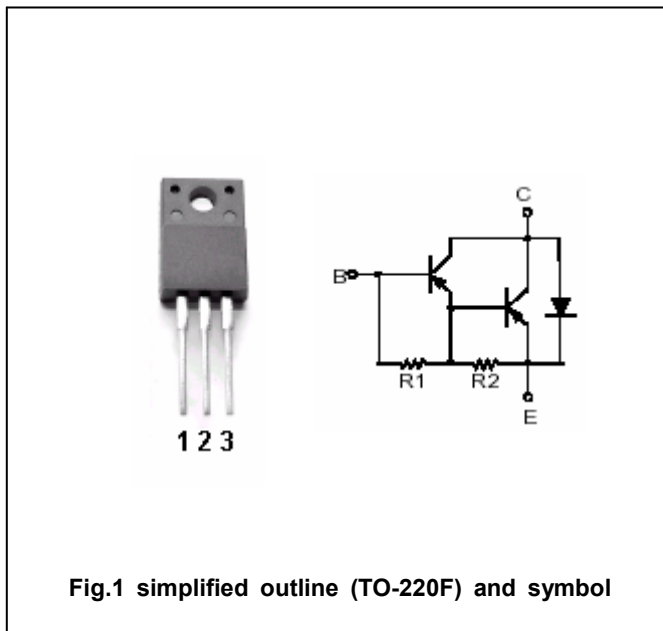


Fig.1 simplified outline (TO-220F) and symbol

Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V _{CBO}	Collector-base voltage	Open emitter	-100	V
V _{CEO}	Collector-emitter voltage	Open base	-100	V
V _{EBO}	Emitter-base voltage	Open collector	-6	V
I _C	Collector current		-6	A
I _{CM}	Collector current-peak		-10	A
I _B	Base current		-1	A
P _C	Collector power dissipation	T _C =25°C	30	W
T _j	Junction temperature		150	°C
T _{stg}	Storage temperature		-55~150	°C

Silicon PNP Power Transistors

2SB1258

CHARACTERISTICS

T_j=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CEO}	Collector-emitter breakdown voltage	I _C =-10mA ; I _B =0	-100			V
V _{CEsat}	Collector-emitter saturation voltage	I _C =-3A; I _B =-6mA			-1.5	V
V _{BEsat}	Base-emitter saturation voltage	I _C =-3A; I _B =-6mA			-2.0	V
I _{CBO}	Collector cut-off current	V _{CB} =-100V; I _E =0			-10	μA
I _{EBO}	Emitter cut-off current	V _{EB} =-6V; I _C =0			-10	μA
h _{FE}	DC current gain	I _C =-3A ; V _{CE} =-2V	1000			
f _T	Transition frequency	I _E =0.2A ; V _{CE} =-12V		100		MHz
C _{OB}	Collector output capacitance	I _E =0; f=1MHz; V _{CB} =-10V		100		pF

Switching times

t _{on}	Turn-on time	I _C =-3A; I _{B1} =-I _{B2} =-6mA V _{CC} =-30V ,R _L =10Ω		0.6		μs
t _s	Storage time			1.6		μs
t _f	Fall time			0.5		μs

Silicon PNP Power Transistors

2SB1258

PACKAGE OUTLINE

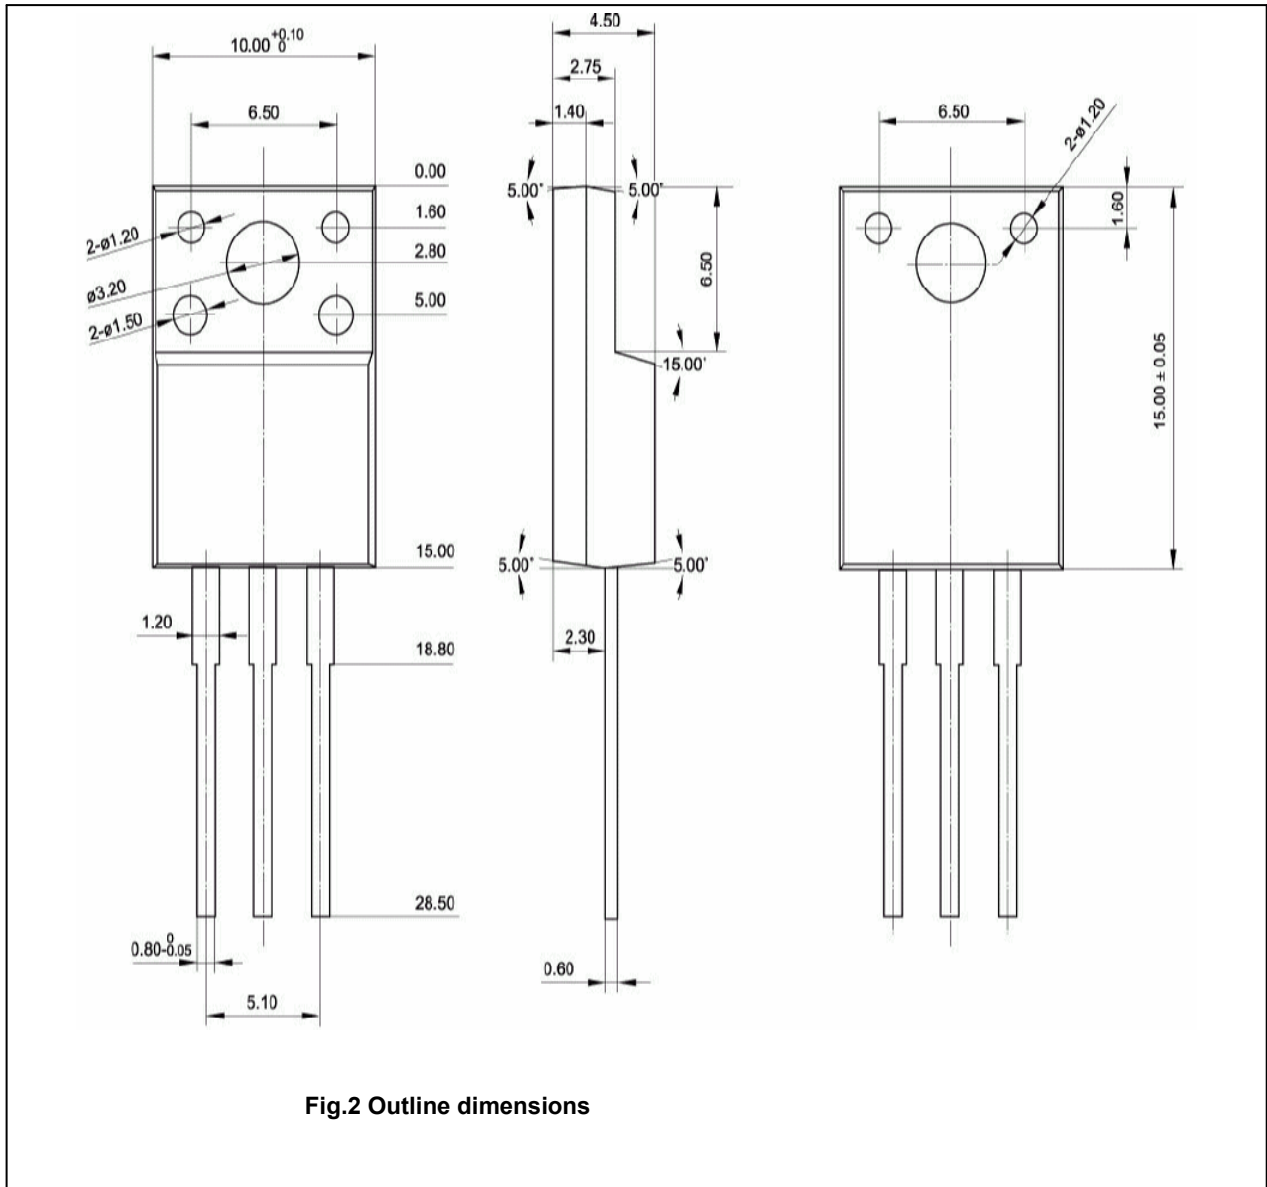


Fig.2 Outline dimensions