

2SC1627A TRANSISTOR (NPN)

FEATURE

Power dissipation

P_{CM} : 0.8 W ($T_{amb}=25^{\circ}C$)

Collector current


I_{CM} : 0.4 A

Collector-base voltage

$V_{(BR)CBO}$: 80 V

Operating and storage junction temperature range

T_J, T_{stg} : $-55^{\circ}C$ to $+150^{\circ}C$

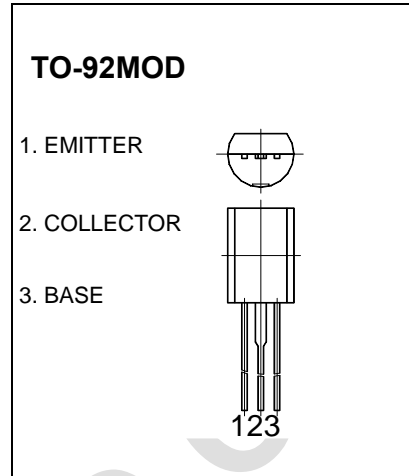

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=100\mu A, I_E=0$	80		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C=5mA, I_B=0$	80		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=100\mu A, I_C=0$	5		V
Collector cut-off current	I_{CBO}	$V_{CB}=50V, I_E=0$		0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=5V, I_C=0$		0.1	μA
DC current gain	$h_{FE(1)}$	$V_{CE}=2V, I_C=50mA$	70	240	
	$h_{FE(2)}$	$V_{CE}=2V, I_C=200mA$	40		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=200mA, I_B=20mA$		0.4	V
Base-emitter voltage	$V_{BE(on)}$	$V_{CE}=2V, I_C=5mA$	0.55	0.8	V
Transition frequency	f_T	$V_{CE}=10V, I_C=10mA$	80		MHz

CLASSIFICATION OF $h_{FE(1)}$

Rank	O	Y
Range	70-140	120-240