

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.

TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

Silicon NPN Power Transistor

2SC2209

DESCRIPTION



- Collector-Emmitter Breakdown Voltage-
: $V_{(BR)CEO} = 40V(\text{Min})$
- High Collector Power Dissipation
- Complement to Type 2SA963

APPLICATIONS

- Designed for low frequency power amplification.

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	50	V
V_{CEO}	Collector-Emmitter Voltage	40	V
V_{EBO}	Emmitter-Base Voltage	5	V
I_C	Collector Current-Continuous	1.5	A
I_{CM}	Collector Current-Peak	3	A
P_C	Collector Power Dissipation @ $T_C=25^\circ\text{C}$	10	W
T_J	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

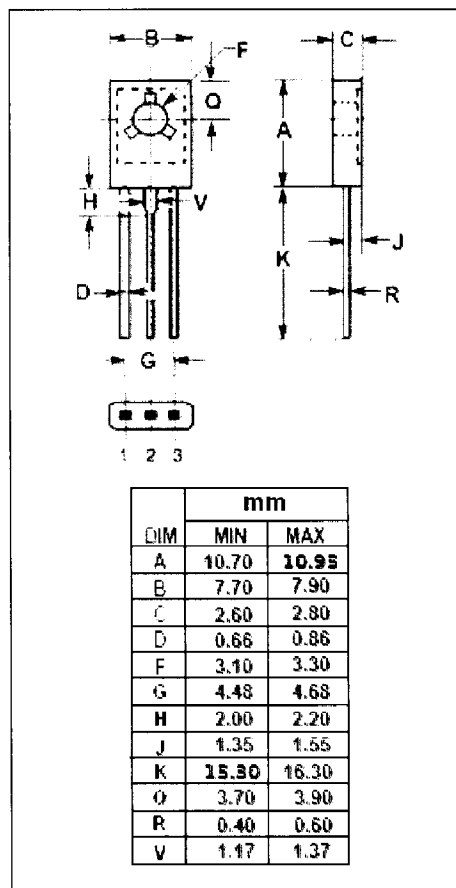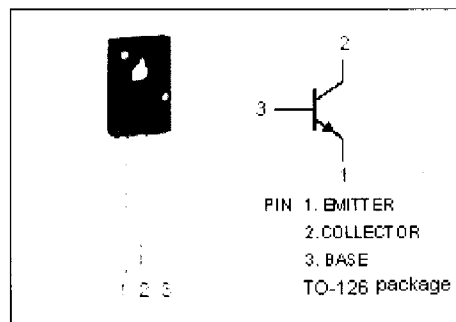

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors

Silicon NPN Power Transistor

2SC2209

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage	$I_C=1\text{mA}; I_E=0$	50			V
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=2\text{mA}; I_B=0$	40			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=1.5\text{A}; I_B=150\text{mA}$			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=2\text{A}; I_B=0.2\text{mA}$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB}=20\text{V}; I_E=0$			1	μA
I_{CEO}	Collector Cutoff Current	$V_{CE}=10\text{V}; I_B=0$			100	μA
I_{CEO}	Collector Cutoff Current	$V_{EB}=5\text{V}; I_C=0$			10	μA
h_{FE}	DC Current Gain	$I_C=1\text{A}; V_{CE}=5\text{V}$	80		220	
f_T	Current-Gain—Bandwidth Product	$I_E=-0.5\text{A}; V_{CB}=5\text{V}$		150		MHz
C_{OB}	Output Capacitance	$I_E=0; V_{CB}=5\text{V}; f_{test}=1\text{MHz}$		50		pF

◆ h_{FE} Classifications

Q	R
80-160	120-220