

New Jersey Semi-Conductor Products, Inc.

20 STERN AVE.
SPRINGFIELD, NEW JERSEY 07081
U.S.A.


TELEPHONE: (973) 376-2922
(212) 227-6005
FAX: (973) 376-8960

Silicon NPN Power Transistor

2SC3212

DESCRIPTION

- Collector-Emitter Sustaining Voltage:
: $V_{CEO(SUS)} = 500V(\text{Min.})$
- Low Collector Saturation Voltage
: $V_{CE(sat)} = 1.0V(\text{Max.}) @ I_C = 5A$
- High Speed Switching

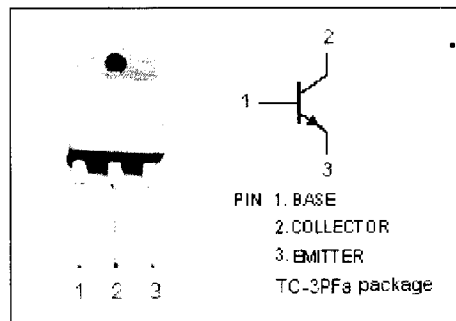


APPLICATIONS

- Designed for high speed switching applications.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	800	V
V_{CEO}	Collector-Emitter Voltage	500	V
V_{EBO}	Emitter-Base Voltage	8	V
I_C	Collector Current-Continuous	7	A
I_{CM}	Collector Current-Peak	15	A
I_B	Base Current-Continuous	4	A
P_C	Collector Power Dissipation @ $T_a = 25^\circ\text{C}$	3	W
	Collector Power Dissipation @ $T_c = 25^\circ\text{C}$	100	
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

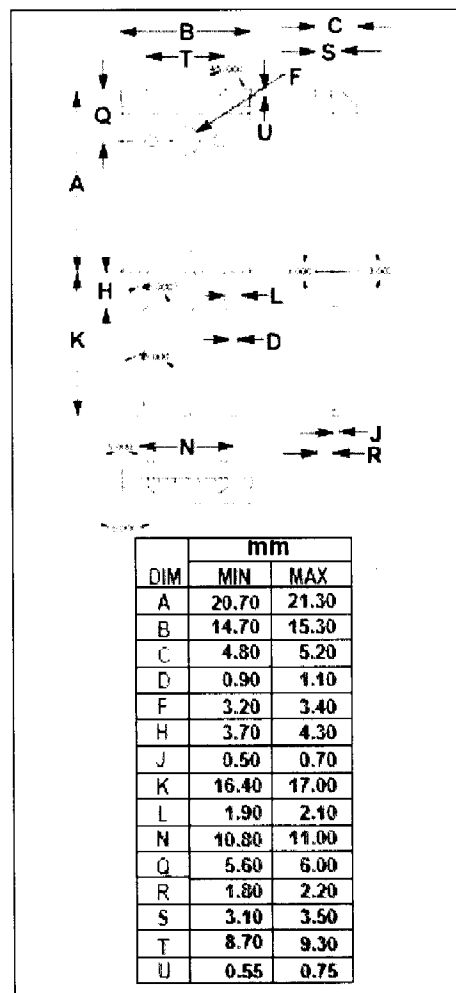

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Quality Semi-Conductors

Silicon NPN Power Transistor

2SC3212

ELECTRICAL CHARACTERISTICS

 $T_C=25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{CE(sus)}$	Collector-Emitter Sustaining Voltage	$I_C = 0.2\text{A}$; $L = 25\text{mH}$	500			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = 5\text{A}$; $I_B = 1\text{A}$			1.0	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = 5\text{A}$; $I_B = 1\text{A}$			1.5	V
I_{CBO}	Collector Cutoff Current	$V_{CB} = 800\text{V}$; $I_E = 0$			0.1	mA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = 5\text{V}$; $I_C = 0$			0.1	mA
h_{FE-1}	DC Current Gain	$I_C = 0.1\text{A}$; $V_{CE} = 5\text{V}$	15			
h_{FE-2}	DC Current Gain	$I_C = 5\text{A}$; $V_{CE} = 5\text{V}$	8			
f_T	Current-Gain—Bandwidth Product	$I_C = 0.5\text{A}$; $V_{CE} = 10\text{V}$		3.5		MHz

Switching Times; Resistive Load

t_{on}	Turn-on Time	$I_C = 5\text{A}$; $I_{B1} = -I_{B2} = 1\text{A}$; $V_{CC} = 200\text{V}$			1.0	μs
t_s	Storage Time				2.5	μs
t_f	Fall Time				1.0	μs